


AERA 3" CUBOID


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT




Declare.



4" Height




8" Height



12" Height

Beam Angles



10° 15° 25° 35° 50° 80° 90° 80°-Up
Low UGR < 10 in 10°, 15°, 25°, 35°, and 50° beams


Performance

LUMEN OUTPUT ¹	WATTS	EFFICACY
1132 lm	10 W	113 lm/W
1545 lm	14 W	110 lm/W
2135 lm	20 W	107 lm/W

¹ Lumen packages are assuming 3500K, 80 CRI, 35° beam, bevel baffle, SDL lens option.

Light Source

Static White
Full Spectrum Static White
SOLA - Dim-to-Warm
DUO - Tunable White




COB

2 Step Color Binning
Up to 95 CRI


Drivers / Protocols

1%, 0.1% Dimming Available
0-10V, TRIAC, ELV, Lutron EcoSystem, DALI, DMX
Emergency Battery (optional)



Smart / Wireless Compatible

Mounting Options



Flat Stem Swivel Stem
Conduit Stem Swivel Stem
Deep Stem

True-to-size with a versatile minimalist esthetic, Aera Cuboid luminaires are high-performance fixtures, delivering visually comfortable lighting suitable for a wide range of applications.

Aera Family (Refer to other spec sheets)

Downlight



2" / 3" / 4"
Round / Square
Recessed
Adjustable



2" / 3" / 4"
Round / Square
Recessed



2" / 3" / 4"
Round / Square
Recessed
Wall Wash

Multi-aperture



2" / 3" / 4"
Round / Square
Recessed
Adjustable



2" / 3" / 4"
Round / Square
Recessed



2" / 3" / 4"
Round / Square
Recessed
Wall Wash

Cylinder



2" / 3" / 4" / 5"
4" Seal
Pendant
Pendant Asymmetric
Pendant Wall Wash



2" / 3" / 4" / 5"
4" Seal
Wall
Wall Asymmetric



2" / 3" / 4" / 5"
4" Seal
Surface
Surface Asymmetric
Surface Wall Wash

Cuboid



3" / 4"
Pendant
Pendant Asymmetric
Pendant Wall Wash

www.lumenwerx.com
T (514) 225-4304

© Lumenwerx, ULC. All rights reserved.



Lumenwerx reserves the right to modify product specifications without notification.
AERA3-CUBOID-PENDANT-SPEC-REVO April 24, 2025

AERA 3" CUBOID

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Project: _____
Type: _____

Order Guide

LUMINAIRE ID ¹	DISTRIBUTION	CUBOID HEIGHT		CUBOID FINISH	BAFFLE STYLE	BAFFLE FINISH
					BVL	
AE3CUP - Aera 3" Cuboid Pendant AE3CUPASY - Aera 3" Cuboid Pendant Asymmetric ¹ Pendant Wall Wash also available. Consult factory.	DI - Direct/Indirect D - Direct	DIRECT/INDIRECT ²	DIRECT	FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#	BVL - Bevel	FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#
		6IN - 6" 8IN - 8" 12IN - 12" CH#IN ³ - Custom height	4IN - 4" 8IN - 8" 12IN - 12"			
		² Requires a remote driver when specified with FLS and CDS canopy types. ³ Specify height (#) in 1" increments only. Up to maximum 36". For minimum heights, see pages 4 and 5.				

LENS * See page 3 for details	LIGHT SOURCE	DIRECT BEAM	COLOR QUALITY	CRI	COLOR TEMP.	ACCESSORIES * See page 3 for details	VOLTAGE
At baffle (choose 1 option)	SW - Static white	10DEG - 10° Very narrow spot	2STP ⁵ - 2 Step MacAdam Ellipse	80CRI ⁶ - 80+ CRI 90CRI ⁶ - 90+ CRI 95CRI ³⁰ - 95+ CRI	24K - 2400K 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	At light element ^{9,10} (choose up to 2 options)	120V - 120V 277V - 277V UNV - 120V-277V 347V ¹² - 347V
SDL - Soft diffused lens, Solite FDL - Frosted diffused lens CL - Clear lens NOL - No lens	FS - Full spectrum static white SOLA - Dim-to-warm single channel control DUO - Tunable white 2-channel control	15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood 80DEG ⁴ - 80° Very wide flood 90DEG ⁴ - 90° Open flood 50DEG - 50° Wide flood	3STP - 3 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse	⁶ Not available with full spectrum static white. ³⁰ Not available with 2400K and 5000K.	SOLA 30K18K - 3000K to 1800K 27K18K - 2700K to 1800K DUO 65K27K - 6500K to 2700K 50K27K - 5000K to 2700K	LSDL - Soft diffused lens, Solite LFDL - Frosted diffused lens LS - Linear spread HEX ¹¹ - Hex louver NA - None ⁹ Separate codes with a "+" if more than one is specified, e.g. LSDL+LS. ¹⁰ LSDL and LFDL cannot be combined. LS and HEX cannot be combined. ¹¹ Not available with 80°/90° beam options.	¹² Available with RD1 driver only. Please consult factory.

* LSDL or LFDL at light element cannot be combined with SDL, FDL, or CL at baffle.

DIRECT WATTAGE ¹³	INDIRECT WATTAGE ¹⁵ Specify NA for Direct	DIMMING ¹⁶	ELECTRICAL
PENDANT 10W - 10 W output, up to 1132 lm 14W - 14 W output, up to 1545 lm 20W ¹⁴ - 20 W output, up to 2135 lm ¹³ Lumen outputs are reduced with full spectrum, consult factory. ¹⁴ Not available for a Direct/Indirect fixture.	PENDANT ASY. 10W - 10 W output, up to 1029 lm 14W - 14 W output, up to 1406 lm 20W ¹⁴ - 20 W output, up to 1942 lm ¹⁵ Lumen outputs are reduced with full spectrum, consult factory.	INTEGRAL DI - 1% 0-10V ELV ¹⁷ - ELV 120V TRI ¹⁷ - TRIAC 120V ¹⁶ PoE (Power-over-Ethernet) compatible. Consult factory for details. ¹⁷ Available with 120V only.	1C - 1 circuit 2C ²² - 2 circuits ²² Available with Direct/Indirect only.
SOLA 14W - 14 W output, up to 950 lm 18W ¹⁴ - 18 W output, up to 1205 lm DUO 10W - 10 W output, up to 715 lm 14W - 14 W output, up to 1005 lm 19W ¹⁴ - 19 W output, up to 1355 lm	SOLA 14W - 14 W output, up to 865 lm 18W ¹⁴ - 18 W output, up to 1100 lm DUO 10W - 10 W output, up to 650 lm 14W - 14 W output, up to 915 lm 19W ¹⁴ - 19 W output, up to 1235 lm	SOLA 14W - 14 W output, up to 950 lm DUO 10W - 10 W output, up to 715 lm 14W - 14 W output, up to 1005 lm NA - Not applicable	IC SDI - Single 0-10V input SELV ¹⁹ - ELV 120V STRI ¹⁷ - TRIAC 120V
		REMOTE ¹⁸ RD1 - 1% 0-10V RELV ¹⁹ - ELV 120V RTRI ¹⁹ - TRIAC 120V RLDEI ²⁰ - Lutron Hi-lume 1% Eco ¹⁸ A remote driver box is provided, see page 6 for details. ¹⁹ Available with 120V only. ²⁰ On-site commissioning is required. ²¹ For emergency battery, code will be like the following example: RD1+EB.	RD20 - DALI RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V +EB ²¹ - Emergency battery DUO RDMX ²⁰ - DMX RDDA ²⁰ - DALI DT6 RDDA8 ²⁰ - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RLD2 ²⁰ - Lutron DALI-2 digital

CANOPY TYPE ²³	CANOPY FINISH	SUSPENSION
FLS ^{24,25} - Flat square canopy, 4" octagonal junction box CDS ^{24,25} - Conduit feed, square canopy, 4" octagonal junction box DS ²⁶ - Deep square canopy ²³ See pages 4 and 5 for details. ²⁴ Direct/Indirect requires a remote driver. ²⁵ For 4" long cuboids, driver has to be in j-box when specified with integral drivers. See page 5 for details. ²⁶ Can accommodate up to 2 drivers.	FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#	STEM ²⁷ BKS##IN - Black stem WHS##IN - White stem BKSS##IN ²⁸ - Black swivel stem WHSS##IN ²⁸ - White swivel stem CF#S##IN ²⁹ - Custom finish stem CF#SS##IN ^{28,29} - Custom finish swivel stem ²⁷ Min 10" - max 72", specify length (##) in inches. ²⁸ Not available with DS canopy option, or for 4" long cuboids when specified with FLS/CDS and integral driver. ²⁹ Specify RAL#.

www.lumenwerx.com
T (514) 225-4304
© Lumenwerx, ULC. All rights reserved.



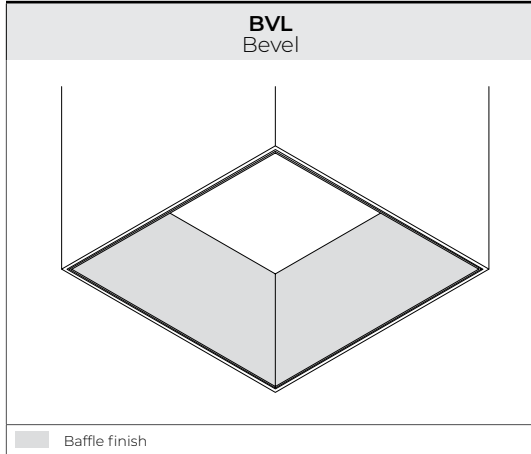
Lumenwerx reserves the right to modify product specifications without notification.
AERA3-CUBOID-PENDANT-SPEC-REVO April 24, 2025

AERA 3" CUBOID


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Baffle Style



Lens and Accessories

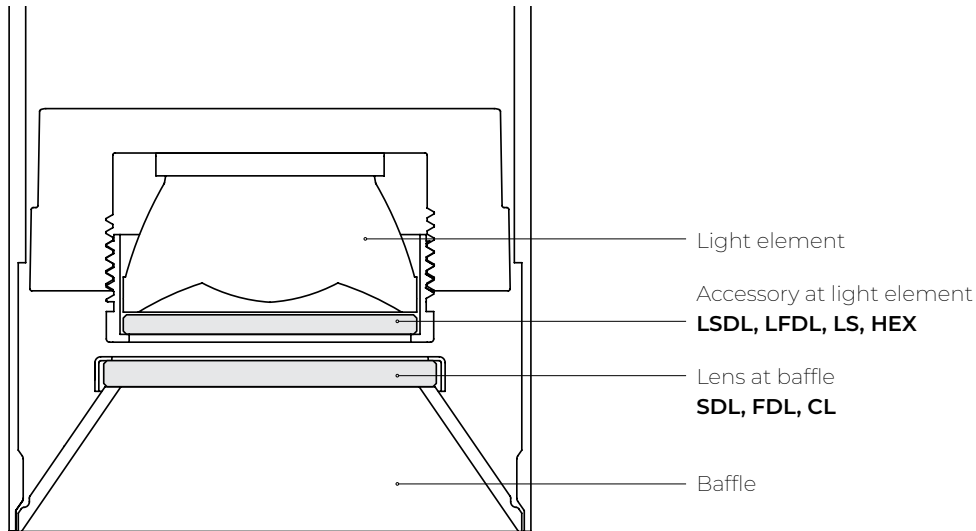

AERA 3" CUBOID

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Dimensions

Canopy	FLS Flat square canopy, 4" octagonal junction box	CDS Conduit feed, square canopy, 4" octagonal junction box	DS Deep square canopy
Refer to page 5 for driver mounting options	For recessed junction box mounting	For surface junction box mounting	For recessed junction box mounting; accommodates 2 drivers
Suspension			
Housing	Standard heights are listed. Refer to page 5 for driver mounting limitations. *4" cuboid height only available with direct distribution.	Standard heights are listed. Refer to page 5 for driver mounting limitations. *4" cuboid height only available with direct distribution.	Standard heights are listed. Refer to page 5 for driver mounting limitations. *4" cuboid height only available with direct distribution.
Baffle	BVL Bevel		








Swivel stem	
Available with FLS/CDS canopy types. Not available for 4" long cuboids when specified with integral driver	
	Max 45° tilt The total stem length includes the 1" swivel base located inside the canopy.







AERA 3" CUBOID

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Driver Mounting

INTEGRAL DRIVER							
Order code	FLS Flat square canopy, 4" octagonal junction box		CDS Conduit feed, square canopy, 4" octagonal junction box		DS Deep square canopy		
Distribution	Direct				Direct	Direct/Indirect	
Driver location	Housing	Canopy	Housing	Canopy	Housing	Canopy	Canopy (2 drivers)
Minimum cuboid height							
Suspension	Stem, Swivel stem ¹				Stem		
	¹ Not available for 4" long cuboids						

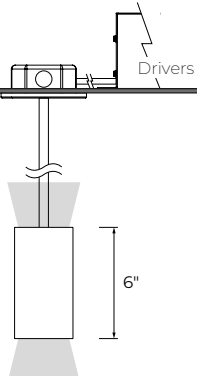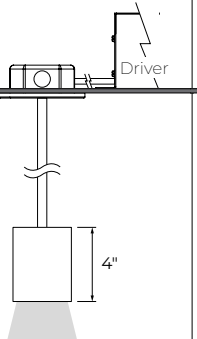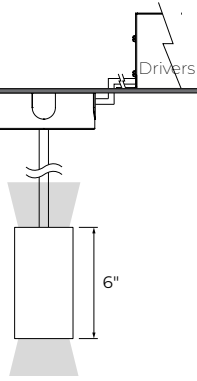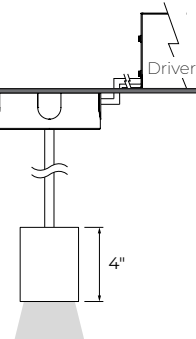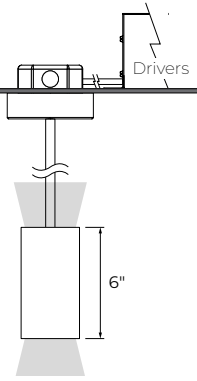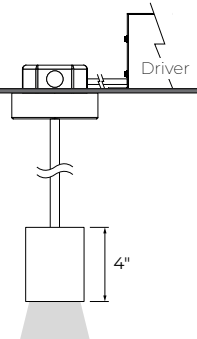REMOTE DRIVER							
Order code	FLS Flat square canopy, 4" octagonal junction box		CDS Conduit feed, square canopy		DS Deep square canopy		
Distribution	Direct/Indirect	Direct	Direct/Indirect	Direct	Direct/Indirect	Direct	
Minimum cuboid height							
Suspension	Stem, Swivel stem				Stem		

AERA 3" CUBOID


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Remote Driver Box

RDB8 / RDB18 / RDB24

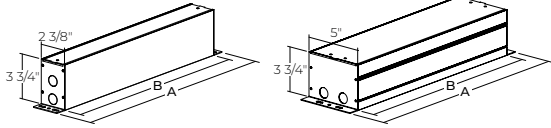RDB24W



REMOTE DRIVER BOX	RDB8	RDB18	RDB24	RDB24W
A	10"	20"	26"	26"
B	8"	18"	24"	24"
DRIVER	RD1 - 1% 0-10V RELV - ELV 120V RTRI - TRIAC 120V SOLA RSD1 - Single 0-10V input RSELV - ELV 120V RSTRI - TRIAC 120V	RLDE1 - Lutron Hi-lume 1% Eco RDA - DALI RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V	Emergency battery (+EB) with the following driver options. RD1+EB - 1% 0-10V RELV+EB - ELV 120V RTRI+EB - TRIAC 120V DJQ RDMX - DMX RDDA - DALI DT6 RDDA8 - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RLD2 - Lutron DALI-2 digital	Emergency battery (+EB) with the following driver options. RLDE1+EB - Lutron Hi-lume 1% Eco RDA+EB - DALI RELD1+EB - eldoLED 1% ECOdrive 0-10V RELD0+EB - eldoLED 0.1% SOLOdrive 0-10V


AERA 3" CUBOID

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Color Quality


COLOR QUALITY - 3500K	
TM-30 Rr	90
TM-30 Ra	100
CRI	90
R9	> 50



Photometrics

PENDANT

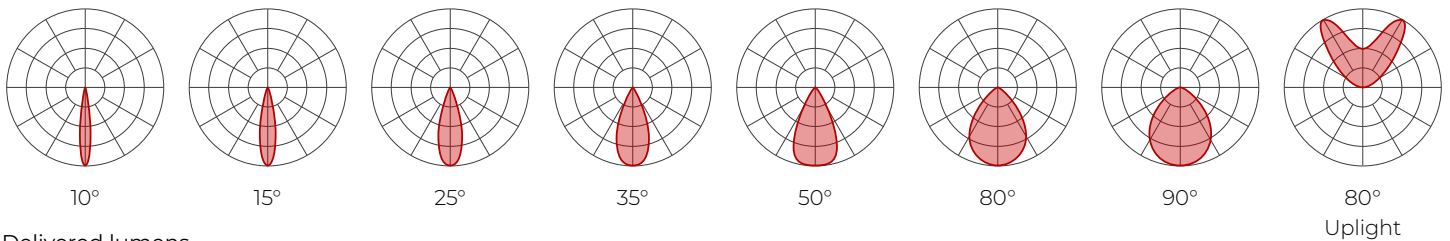Values calculated based on 3500K, bevel baffle, and SDL lens option.



Delivered lumens

BEAM	90 CRI								95 CRI								80 CRI							
	10°	15°	25°	35°	50°	80°	90°	Uplight	10°	15°	25°	35°	50°	80°	90°	Uplight	10°	15°	25°	35°	50°	80°	90°	Uplight
10 W	888	987	1053	1058	937	843	843	683	684	760	811	815	721	649	649	491	950	1056	1127	1132	1003	902	902	683
14 W	1212	1347	1438	1444	1280	1152	1152	877	933	1037	1107	1112	986	887	887	675	1297	1441	1539	1545	1370	1233	1233	939
20 W	1675	1861	1986	1995	1768	1591	1591	NA	1290	1433	1529	1536	1361	1225	1225	NA	1792	1991	2125	2135	1892	1703	1703	NA

Efficacy

BEAM	90 CRI								95 CRI								80 CRI							
	10°	15°	25°	35°	50°	80°	90°	Uplight	10°	15°	25°	35°	50°	80°	90°	Uplight	10°	15°	25°	35°	50°	80°	90°	Uplight
10 W	89	99	105	106	94	84	84	64	68	76	81	81	72	65	65	49	95	106	113	113	100	90	90	68
14 W	87	96	103	103	91	82	82	63	67	74	79	79	70	63	63	48	93	103	110	110	98	88	88	67
20 W	84	93	99	100	88	80	80	NA	64	72	76	77	68	61	61	NA	90	100	106	107	95	85	85	NA

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, baffle colors, lensing and accessories will change the lumen value.

CCT	BAFFLE STYLE AND COLOR		LENS * (At baffle)		ACCESSORIES * (At light element)	
2400K	0.87	Bevel White Black	SDL - Soft diffused lens, Solite	1	LSDL - Soft diffused lens, Solite	1
2700K	0.94		FDL - Frosted lens	0.8	LFDL - Frosted lens	0.8
3000K	0.98		CL - Clear lens	1.1	LS - Linear spread	0.84
3500K	1		NOL - No lens	1.1	HEX - Hex louver	0.86
4000K	1.05					
5000K	1.05					

* When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory.
e.g. NOL + LSDL + LS = 1.1 x 1 x 0.84 = 0.924

DIRECT/INDIRECT - EFFICACY CALCULATION

For Direct/Indirect - performance values, follow the formula.

$$\frac{\left(\begin{matrix} \text{DIRECT DELIVERED LM} \\ + \\ \text{UPLIGHT DELIVERED LM} \end{matrix} \right)}{\left(\begin{matrix} \text{DIRECT WATTAGE} \\ + \\ \text{UPLIGHT WATTAGE} \end{matrix} \right)} = \text{EFFICACY}$$



AERA 3" CUBOID

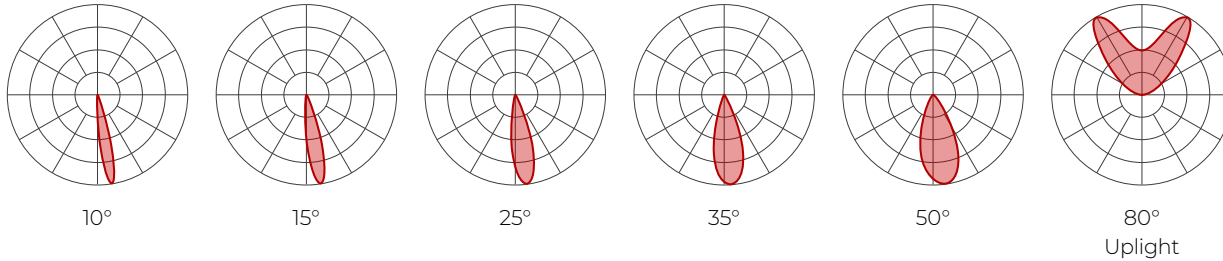
PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Photometrics

PENDANT ASYMMETRIC

Values calculated based on 3500K, bevel baffle, and SDL lens option.



Delivered lumens

CRI	90 CRI						95 CRI						80 CRI					
	BEAM	10°	15°	25°	35°	50°	Uplight	10°	15°	25°	35°	50°	Uplight	10°	15°	25°	35°	50°
10 W	770	855	962	952	876	683	592	658	741	733	675	491	823	914	1029	1018	937	683
14 W	1050	1167	1314	1300	1197	877	809	899	1012	1001	921	675	1124	1249	1406	1391	1280	939
20 W	1451	1612	1815	1795	1653	NA	1117	1241	1397	1382	1272	NA	1553	1725	1942	1921	1768	NA

Efficacy

CRI	90 CRI						95 CRI						80 CRI					
	BEAM	10°	15°	25°	35°	50°	Uplight	10°	15°	25°	35°	50°	Uplight	10°	15°	25°	35°	50°
10 W	77	85	96	95	88	64	59	66	74	73	67	49	82	91	103	102	94	68
14 W	75	83	94	93	85	63	58	64	72	71	66	48	80	89	100	99	91	67
20 W	73	81	91	90	83	NA	56	62	70	69	64	NA	78	86	97	96	88	NA

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, baffle colors, lensing and accessories will change the lumen value.

CCT		BAFFLE STYLE AND COLOR		LENS * (At baffle)		ACCESSORIES * (At light element)		
2400K	0.87	Bevel	White	1	SDL - Soft diffused lens, Solite	1	LSDL - Soft diffused lens, Solite	1
2700K	0.94		Black	1	FDL - Frosted lens	0.8	LFDL - Frosted lens	0.8
3000K	0.98		CL - Clear lens	1.1	LS - Linear spread	0.84		
3500K	1		NOL - No lens	1.1	HEX - Hex louver	0.86		
4000K	1.05							
5000K	1.05							

* When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory.
e.g. NOL + LSDL + LS = 1.1 x 1 x 0.84 = 0.924

For SOLA and DUO, please consult factory.

DIRECT/INDIRECT - EFFICACY CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\frac{\left(\begin{array}{c} \text{DIRECT} \\ \text{DELIVERED LM} \end{array} + \begin{array}{c} \text{UPLIGHT} \\ \text{DELIVERED LM} \end{array} \right)}{\left(\begin{array}{c} \text{DIRECT} \\ \text{WATTAGE} \end{array} + \begin{array}{c} \text{UPLIGHT} \\ \text{WATTAGE} \end{array} \right)} = \text{EFFICACY}$$

AERA 3" CUBOID

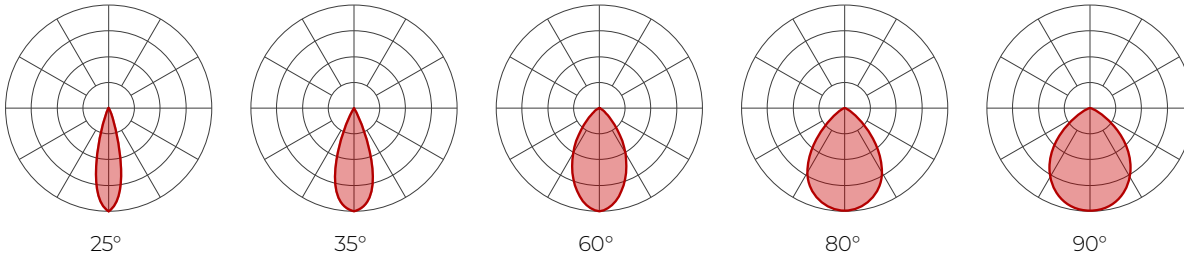
PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Photometrics

SOLA/DUO

Values calculated based on bevel baffle and SDL lens option.



SOLA

BEAM		25°		35°		60°		80°		90°		Uplight	
		lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/w
14 W	3000K	907	65	950	68	867	62	745	53	686	49	950	68
	2700K	907	65	950	68	867	62	745	53	686	49	950	68
18 W	3000K	1150	64	1205	67	1100	61	945	53	870	48		
	2700K	1150	64	1205	67	1100	61	945	53	870	48		

DUO

BEAM		25°		35°		60°		80°		90°		Uplight	
		lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/w
10 W	6500K	678	68	715	72	628	63	541	54	496	50	715	72
	5000K	678	68	715	72	628	63	541	54	496	50	715	72
	2700K	544	55	575	58	507	51	435	44	401	40	575	58
14 W	6500K	953	68	1005	72	883	63	760	54	697	50	1005	72
	5000K	953	68	1005	72	883	63	760	54	697	50	1005	72
	2700K	779	56	808	58	712	51	612	44	564	40	808	58
19 W	6500K	1285	68	1355	71	1190	63	1025	54	940	49		
	5000K	1285	68	1355	71	1190	63	1025	54	940	49		
	2700K	1050	55	1090	57	960	51	825	43	760	40		

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, baffle styles, baffle colors, lensing and accessories will change the lumen value.

BAFFLE STYLE AND COLOR			LENS * (At baffle)		ACCESSORIES * (At light element)	
Bevel	White	1	SDL - Soft diffused lens, Solite	1	LSDL - Soft diffused lens, Solite	1
	Black	1	FDL - Frosted lens	0.8	LFDL - Frosted lens	0.8
			CL - Clear lens	1.1	LS - Linear spread	0.84
			NOL - No lens	1.1	HEX - Hex louver	0.86

* When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory.
e.g. NOL + LSDL + LS = 1.1 x 1 x 0.84 = 0.924

AERA 3" CUBOID

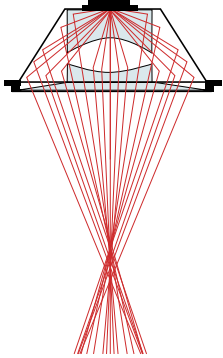
PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Technical Specifications

OPTIC

XPoint™ Refraction Technology optics provide precise optical control in a remarkably compact form. Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.



LIGHT SOURCE

Static white

Compact COB (Chip-On-Board) LED module, available in 2400K, 2700K, 3000K, 3500K, 4000K and 5000K with a choice of 80 CRI, 90 CRI, or 95 CRI, with elevated R9 value for 90 CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region which helps increase Cyanosis Observation Index (COI) and assist in regulating circadian rhythms. The cyan region in full spectrum LED is richer at the 480 nm range.

Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. Two color temperature range options are offered: 3000K to 1800K, and 2700K to 1800K. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool to warm LED arrays - maintaining a CRI above 90. Two color temperature range options are offered: 6500K to 2700K, and 5000K to 2700K. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency>84%, PF>0.9, THD<20%.

Integral: 0-10V, ELV, TRIAC

Remote: 0-10V, ELV, TRIAC, Lutron Hi-Lume 1% EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron DALI-2 digital

Emergency battery option: Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10 W, the battery provides 6 W of emergency light output. For fixtures 10 W and over, the battery provides 10 W.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing: Die-cast and extruded aluminum

Stem: Ø 1/2" rigid stem and swivel stem 10" to 72" standard length

Canopy: Flat, conduit feed, and deep

Finish: Matte white, matte black, champagne, and dark bronze.

Custom colors also available (provide RAL #). Satin silver and matte silver finishes are also available for Baffle.

Heat sink: Die-cast aluminum

Baffle: Die-cast aluminum

Baffle style: Bevel

AERA 3" CUBOID

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



WEIGHT

Direct/Indirect	Direct
6" : 1.9 lbs - 0.9 kg	4" : 1.9 lbs - 0.9 kg
8" : 2.4 lbs - 1.1 kg	8" : 2.6 lbs - 1.2 kg
12" : 2.8 lbs - 1.3 kg	12" : 3.0 lbs - 1.4 kg

LENS AND ACCESSORIES



Soft diffused lens, Solite



Frosted diffused lens



Clear lens



Linear spread



Hex louver

ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Declare: [LBC Red List Approved](#)

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.