


AERA 4" CYLINDER


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT




Declare.

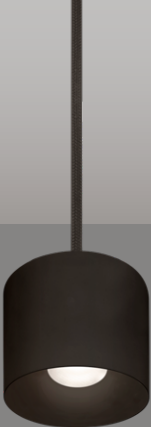

**4" Height
Bevel**




**8" Height
Decorative Bevel**



**12" Height
Pinhole**

True-to-size with a versatile minimalist esthetic, Aera Cylinder luminaires are high-performance fixtures, delivering visually comfortable lighting suitable for a wide range of applications.

Beam Angles



10° 15° 25° 35° 50° 80° 90° 80°-Up
Low UGR < 10 in 10°, 15°, 25°, 35°, and 50° beams


Performance

LUMEN OUTPUT ¹	WATTS	EFFICACY
1481 lm	14 W	106 lm/W
2066 lm	20 W	103 lm/W
2775 lm	28 W	99 lm/W

¹ Lumen packages are assuming 3500K, 80+ CRI, 35° beam, bevel baffle, SDL lens option.

Light Source

Static White
Full Spectrum Static White
SOLA - Dim-to-Warm
DUO - Tunable White




COB

2 Step Color Binning
Up to 95+ CRI


Drivers / Protocols

1%, 0.1% Dimming Available
0-10V, TRIAC, ELV, Lutron EcoSystem, DALI, DMX
Emergency Battery (optional)






Smart / Wireless Compatible

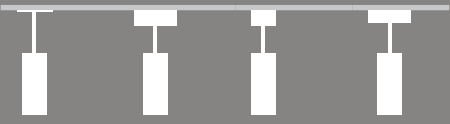Mounting Options



<p>Flat Power Cord Stem Swivel Stem</p>	<p>Conduit Power Cord Stem Swivel Stem</p>	<p>Direct Power Cord Stem</p>	<p>Deep Power Cord Stem</p>
--	---	--	--

Aera Family (Refer to other spec sheets)

<h3>Downlight</h3>  <table border="0"> <tr> <td style="text-align: center;"> <p>2" / 3" / 4" Round / Square Recessed Adjustable</p> </td> <td style="text-align: center;"> <p>2" / 3" / 4" Round / Square Recessed</p> </td> <td style="text-align: center;"> <p>2" / 3" / 4" Round / Square Recessed Wall Wash</p> </td> </tr> </table>			<p>2" / 3" / 4" Round / Square Recessed Adjustable</p>	<p>2" / 3" / 4" Round / Square Recessed</p>	<p>2" / 3" / 4" Round / Square Recessed Wall Wash</p>	<h3>Multi-aperture</h3>  <table border="0"> <tr> <td style="text-align: center;"> <p>2" / 3" / 4" Round / Square Recessed Adjustable</p> </td> <td style="text-align: center;"> <p>2" / 3" / 4" Round / Square Recessed</p> </td> <td style="text-align: center;"> <p>2" / 3" / 4" Round / Square Recessed Wall Wash</p> </td> </tr> </table>			<p>2" / 3" / 4" Round / Square Recessed Adjustable</p>	<p>2" / 3" / 4" Round / Square Recessed</p>	<p>2" / 3" / 4" Round / Square Recessed Wall Wash</p>	<h3>Cylinder</h3>  <table border="0"> <tr> <td style="text-align: center;"> <p>2" / 3" / 4" / 5" / 6" 4" Seal Pendant Pendant Asymmetric Pendant Wall Wash</p> </td> <td style="text-align: center;"> <p>2" / 3" / 4" / 5" / 6" 4" Seal Wall Wall Asymmetric</p> </td> <td style="text-align: center;"> <p>2" / 3" / 4" / 5" / 6" 4" Seal Surface Surface Asymmetric Surface Wall Wash</p> </td> </tr> </table>			<p>2" / 3" / 4" / 5" / 6" 4" Seal Pendant Pendant Asymmetric Pendant Wall Wash</p>	<p>2" / 3" / 4" / 5" / 6" 4" Seal Wall Wall Asymmetric</p>	<p>2" / 3" / 4" / 5" / 6" 4" Seal Surface Surface Asymmetric Surface Wall Wash</p>
<p>2" / 3" / 4" Round / Square Recessed Adjustable</p>	<p>2" / 3" / 4" Round / Square Recessed</p>	<p>2" / 3" / 4" Round / Square Recessed Wall Wash</p>															
<p>2" / 3" / 4" Round / Square Recessed Adjustable</p>	<p>2" / 3" / 4" Round / Square Recessed</p>	<p>2" / 3" / 4" Round / Square Recessed Wall Wash</p>															
<p>2" / 3" / 4" / 5" / 6" 4" Seal Pendant Pendant Asymmetric Pendant Wall Wash</p>	<p>2" / 3" / 4" / 5" / 6" 4" Seal Wall Wall Asymmetric</p>	<p>2" / 3" / 4" / 5" / 6" 4" Seal Surface Surface Asymmetric Surface Wall Wash</p>															

www.lumenwerx.com
T (514) 225-4304

© Lumenwerx, ULC. All rights reserved.



Lumenwerx reserves the right to modify product specifications without notification.
AERA4-CYLINDER-PENDANT-SPEC-REV8 January 12, 2026

AERA 4" CYLINDER

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Project: _____

Type: _____



For a Title 24 JA8 compliant fixture, see page 3.

Order Guide

LUMINAIRE ID ¹	DISTRIBUTION	CYLINDER HEIGHT		CYLINDER FINISH	BAFFLE STYLE	BAFFLE FINISH
AE4CYP - Aera 4" Cylinder Pendant AE4CYPASY - Aera 4" Cylinder Pendant Asymmetric ¹ Pendant Wall Wash also available. Consult other spec sheet.	DI - Direct/Indirect D - Direct	DIRECT/INDIRECT ²	DIRECT	FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#	BVL - Bevel PHL - Pinhole BVLD - Decorative bevel	FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#
		6IN ³ - 6" 8IN - 8" 12IN - 12" CH#IN ⁵ - Custom height	4IN ⁴ - 4" 8IN - 8" 12IN - 12"			

² Only available with DR canopy option when specified with integral drivers.
³ Not available with Asymmetric.
⁴ Not available with DMNC/DMRM canopy options when specified with integral drivers.
⁵ Specify height (#) in 1" increments only. Up to maximum 36". For minimum heights, see page 4.

LENS * See page 4 for details	LIGHT SOURCE	DIRECT BEAM	COLOR QUALITY	CRI	COLOR TEMPERATURE		ACCESSORIES * See page 4 for details	VOLTAGE
At baffle (choose 1 option) Specify NOL for Pinhole SDL - Soft diffused lens, Solite FDL - Frosted diffused lens CL - Clear lens NOL - No lens	SW - Static white FS - Full spectrum static white SOLA - Dim-to-warm single channel control DUO - Tunable white 2-channel control	10DEG - 10° Very narrow spot 15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood 80DEG ⁶ - 80° Very wide flood 90DEG ⁶ - 90° Open flood	2STP ⁷ - 2 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse ⁷ Not available with full spectrum.	80CRI ⁸ - 80+ CRI 90CRI ⁸ - 90+ CRI 95CRI - 95+ CRI ⁸ Not available with full spectrum.	22K ⁹ - 2200K 24K ¹⁰ - 2400K 27K - 2700K 30K - 3000K ⁹ Only available with 90+ CRI. ¹⁰ Not available with 95+ CRI.	35K - 3500K 40K - 4000K 50K ¹⁰ - 5000K SOLA 30K18K - 3000K to 1800K 27K18K - 2700K to 1800K DUO 65K27K - 6500K to 2700K 50K27K - 5000K to 2700K	At light element ^{11,12} (choose up to 2 options for SW/FS and 1 option for SOLA/DUO) LSDL - Soft diffused lens, Solite LFDL - Frosted diffused lens LS - Linear spread HEX ¹³ - Hex louver NA - None ¹¹ Separate codes with a "+" if more than one is specified, e.g. LSDL+LS. ¹² LSDL and LFDL cannot be combined. LS and HEX cannot be combined. ¹³ Not available with 80°/90° beam options.	120V - 120V 277V - 277V UNV - 120V-277V 347V ¹⁴ - 347V ¹⁴ Available with RD1 driver only. Please consult factory.
		25DEG - 25° Spot 35DEG - 35° Narrow flood 60DEG - 60° Wide flood 80DEG ⁶ - 80° Very wide flood 90DEG ⁶ - 90° Open flood	3STP - 3 Step MacAdam Ellipse ⁹ 0CRI - 90+ CRI	⁶ Not available with Asymmetric.	⁹ 0CRI - 90+ CRI	SOLA 30K18K - 3000K to 1800K 27K18K - 2700K to 1800K DUO 65K27K - 6500K to 2700K 50K27K - 5000K to 2700K	¹¹ Separate codes with a "+" if more than one is specified, e.g. LSDL+LS. ¹² LSDL and LFDL cannot be combined. LS and HEX cannot be combined. ¹³ Not available with 80°/90° beam options.	¹⁴ Available with RD1 driver only. Please consult factory.

* LSDL or LFDL at light element cannot be combined with SDL, FDL, or CL at baffle.

DIRECT WATTAGE ¹⁵	INDIRECT WATTAGE ¹⁸ Specify NA for Direct	DIMMING ¹⁹

PENDANT	PENDANT ASY.	14W - 14 W output, up to 1102 lm 20W - 20 W output, up to 1550 lm NA - Not applicable	INTEGRAL	REMOTE ²¹
14W - 14 W output, up to 1538 lm 20W - 20 W, up to 2146 lm 28W ^{16,17} - 28 W, up to 2882 lm ¹⁵ Lumen outputs are reduced with full spectrum, consult factory. ¹⁶ Not available for a Direct/Indirect fixture. ¹⁷ Not available with full spectrum.	14W - 14 W output, up to 1119 lm 20W - 20 W, up to 1782 lm 28W ^{16,17} - 28 W, up to 2393 lm	¹⁸ Lumen outputs are reduced with full spectrum, consult factory.	DI - 1% 0-10V ELV ²⁰ - ELV 120V TRI ²⁰ - TRIAC 120V STR ²⁰ - TRIAC 120V	RD1 - 1% 0-10V RELV ²⁰ - ELV 120V RTRI ²⁰ - TRIAC 120V RLDEI ²² - Lutron Hi-Lume 1% Eco +EB ²³ - Emergency battery ²¹ PoE (Power-over-Ethernet) compatible. Consult factory for details. ²⁰ Available with 120V only. ²² A remote driver box is provided. ²³ On-site commissioning is required. ²⁴ To specify, add +EB to the selected dimming option, e.g. RD1+EB.
SOLA 18W - 18 W output, up to 1205 lm 28W ¹⁶ - 28 W output, up to 1945 lm DUO 14W - 14 W output, up to 1005 lm 20W - 20 W output, up to 1435 lm 28W ¹⁶ - 28 W output, up to 2055 lm	SOLA 18W - 18 W output, up to 1100 lm 28W ¹⁶ - 28 W output, up to 1775 lm DUO 14W - 14 W output, up to 915 lm 20W - 20 W output, up to 1305 lm 28W ¹⁶ - 28 W output, up to 1875 lm	SOLA 18W - 18 W output, up to 1205 lm DUO 14W - 14 W output, up to 1005 lm 20W - 20 W output, up to 1435 lm NA - Not applicable	SOLA SDI - Single 0-10V input SELV ²⁰ - ELV 120V STR ²⁰ - TRIAC 120V	RD1 - 1% 0-10V RELV ²⁰ - ELV 120V RTRI ²⁰ - TRIAC 120V RLDEI ²² - Lutron Hi-Lume 1% Eco +EB ²³ - Emergency battery SOLA RSDI - Single 0-10V input RSELV ²⁰ - ELV 120V RSTR ²⁰ - TRIAC 120V DUO RDMX ²² - DMX RDDA ²² - DALI DT6 RDDA8 ²² - DALI DT8 RDD1 - Dual 0-10V input for CCT/intensity RLD2 ²² - Lutron DALI-2 digital +EB ²³ - Emergency battery

ELECTRICAL	CANOPY TYPE ²⁵	CANOPY FINISH	SUSPENSION	OPTION ³⁶	
1C - 1 circuit 2C ²⁴ - 2 circuits ²⁴ Available with Direct/Indirect only.	FLR ^{26,27} - Flat round canopy, 4" octagonal junction box CDR ^{26,27} - Conduit feed, round canopy DMNC ^{26,28} - Direct mount, new construction DMRM ^{26,28,29} - Direct mount, remodel DR ³⁰ - Deep round canopy ²⁵ See page 6 for details. ²⁶ Direct/Indirect requires a remote driver. ²⁷ For 4" long cylinders, driver has to be in j-box when specified with integral drivers. See page 6 for details. ²⁸ 4" long cylinders require a remote driver. ²⁹ Single wiring entry only. No daisy chain connections allowed. ³⁰ Can accommodate up to 2 drivers.	FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#	POWER CORD ^{31,32} BPC##IN - Black PVC WPC##IN - White PVC ³¹ Min 18" - max 72", specify length (##) in inches. ³² Not available with Asymmetric.	STEM ³³ BKS##IN - Matte black stem WHS##IN - Matte white stem BKSS##IN ³⁴ - Matte black swivel stem WHSS##IN ³⁴ - Matte white swivel stem CF#S##IN ³⁵ - Custom finish stem CF#SS##IN ^{34,35} - Custom finish swivel stem ³³ Min 10" - max 72", specify length (##) in inches. ³⁴ Not available with DMNC/DMRM/DR canopy options, or for 4" long cylinders when specified with FLR/CDR and integral driver. ³⁵ Specify RAL#.	NA - None ³⁶ To specify a JA8 compliant fixture, see page 3.

www.lumenwerx.com
T (514) 225-4304

© Lumenwerx, ULC. All rights reserved.



Lumenwerx reserves the right to modify product specifications without notification.
AERA4-CYLINDER-PENDANT-SPEC-REV8 January 12, 2026

AERA 4" CYLINDER

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT
Title 24 JA8



Project: _____
Type: _____



Order Guide

LUMINAIRE ID ¹	DISTRIBUTION	CYLINDER HEIGHT	CYLINDER FINISH	BAFFLE STYLE	BAFFLE FINISH
	D				
AE4CYP - Aera 4" Cylinder Pendant AE4CYPASY - Aera 4" Cylinder Pendant Asymmetric ¹ Pendant Wall Wash also available. Consult other spec sheet.	D - Direct	4IN ² - 4" 8IN - 8" 12IN - 12" CH#IN ³ - Custom height ² Not available with DMNC/DMRM canopy options when specified with integral drivers. ³ Specify height (#) in 1" increments only. Up to maximum 36". For minimum heights, see page 4.	FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#	BVL - Bevel PHL - Pinhole BVLD - Decorative bevel	FTMW - Matte white FTMB - Matte black FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#

LENS * See page 4 for details	LIGHT SOURCE	DIRECT BEAM	COLOR QUALITY	CRI	COLOR TEMP.	ACCESSORY * See page 4 for details	VOLTAGE
	SW			90CRI			
At baffle Specify NOL for Pinhole SDL - Soft diffused lens, Solite FDL - Frosted diffused lens CL - Clear lens NOL - No lens	SW - Static white	15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood 80DEG ⁴ - 80° Very wide flood 90DEG ⁴ - 90° Open flood ⁴ Not available with Asymmetric.	2STP - 2 Step MacAdam Ellipse 3STP - 3 Step MacAdam Ellipse	90CRI - 90+ CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	At light element LSDL - Soft diffused lens, Solite LFDL - Frosted diffused lens NA - None	120V - 120V 277V - 277V UNV - 120V-277V

* LSDL or LFDL at light element cannot be combined with SDL, FDL, or CL at baffle.

DIRECT WATTAGE		INDIRECT WATTAGE	DIMMING	ELECTRICAL	
14W		NA		1C	
PENDANT	PENDANT ASY.	NA - Not applicable	INTEGRAL	REMOTE ⁶	
14W - 14 W output, up to 1538 lm	14W - 14 W output, up to 1119 lm		D1 - 1% 0-10V ELV ⁵ - ELV 120V TRI ⁵ - TRIAC 120V ⁵ Available with 120V only.	RD1 - 1% 0-10V RELV ⁷ - ELV 120V RTRI ⁷ - TRIAC 120V RLDEI ⁸ - Lutron Hi-Lume 1% Eco ⁶ A remote driver box is provided. ⁷ Available with 120V only. ⁸ On-site commissioning is required.	

CANOPY TYPE ⁹	CANOPY FINISH	SUSPENSION	OPTION
			JA8
FLR ¹⁰ - Flat round canopy, 4" octagonal junction box CDR ¹⁰ - Conduit feed, round canopy DMNC ¹¹ - Direct mount, new construction DMRM ^{11,12} - Direct mount, remodel DR ¹³ - Deep round canopy ⁹ See page 6 for details. ¹⁰ For 4" long cylinders, driver has to be in j-box when specified with integral drivers. See page 6 for details. ¹¹ 4" long cylinders require a remote driver. ¹² Single wiring entry only. No daisy chain connections allowed. ¹³ Can accommodate up to 2 drivers.	FTMW - Matte white FTMB - Matte black FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#	POWER CORD ^{14,15} BPC##IN - Black PVC WPC##IN - White PVC ¹⁴ Min 18" - max 72", specify length (##) in inches. ¹⁵ Not available with Asymmetric.	STEM ¹⁶ BKS##IN - Matte black stem WHS##IN - Matte white stem BKSS##IN ¹⁷ - Matte black swivel stem WHSS##IN ¹⁷ - Matte white swivel stem CF#S##IN ¹⁸ - Custom finish stem CF#SS##IN ^{17,18} - Custom finish swivel stem ¹⁶ Min 10" - max 72", specify length (##) in inches. ¹⁷ Not available with DMNC/DMRM/DR canopy options, or for 4" long cylinders when specified with FLR/CDR and integral driver. ¹⁸ Specify RAL#.



AERA 4" CYLINDER


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT




Dimensions

CYLINDER

Direct/Indirect

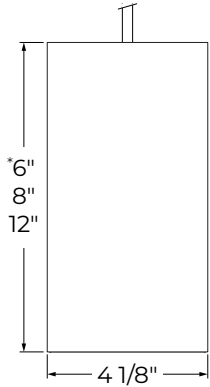

Direct

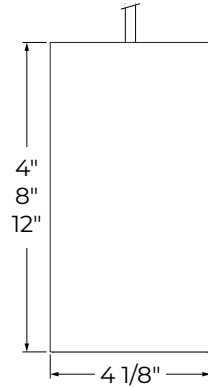



*Not available with Asymmetric.

Minimum heights - Cylinder

Size	Distribution	Integral driver in cylinder	Integral driver in canopy or J-box	Remote driver
Ø 4"	Direct/Indirect	NA	6"	6"
	Direct	8"	4"	4"

*Consult factory for maximum heights.

Lens and Accessories



BAFFLE


BVL Bevel	PHL Pinhole	BVLD Decorative bevel
<p>■ Baffle finish ■ Matte black</p>		

AERA 4" CYLINDER


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Finishes




FTMW - Matte white



FTMB - Matte black



FSPC - Satin silver



FSSPC - Matte silver



FCHP - Champagne



FDBZ - Dark bronze

AERA 4" CYLINDER

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Mounting

CANOPY

INTEGRAL DRIVER					
Order code	FLR Flat round canopy, 4" octagonal junction box	CDR Conduit feed, round canopy	DMNC Direct mount, new construction	DMRM Direct mount, remodel	DR Deep round canopy
Canopy type					
Distribution	Direct				Direct/Indirect Direct
Canopy size	Ø 4 1/2" Height 3/8"	Ø 5 1/2" Height 1 15/16"	Ø 4 1/8" Height 2"		Ø 5 5/8" Height 1 3/8"
Suspension	Power cord, Stem, Swivel stem ¹ ¹ Not available for 4" long cylinders specified with FLR/CDR.		Power cord, Stem		
Min. height	4" (Driver in junction box) 8" (Driver in cylinder)		8"		D/I - 6" (Pendant) D/I - 8" (Pendant Asymmetric) D - 4"
				Single wiring entry only. No daisy chain connections allowed.	D/I - 2 drivers in canopy D - 1 driver in canopy or cylinder
REMOTE DRIVER					
Order code	FLR Flat round canopy, 4" octagonal junction box	CDR Conduit feed, round canopy	DMNC Direct mount, new construction	DMRM Direct mount, remodel	DR Deep round canopy
Canopy type					
Distribution	Direct/Indirect Direct				
Canopy size	Ø 4 1/2" Height 3/8"	Ø 5 1/2" Height 1 15/16"	Ø 4 1/8" Height 2"		Ø 5 5/8" Height 1 3/8"
Suspension	Power cord, Stem, Swivel stem		Power cord, Stem		
Min. height	D/I - 6" (Pendant) D/I - 8" (Pendant Asymmetric) D - 4"				
				Single wiring entry only. No daisy chain connections allowed.	

AERA 4" CYLINDER

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



SUSPENSION

POWER CORD ¹	STEM	
PVC	Stem	Swivel stem ^{2,3}
Power Cord Lengths (*)	Stem Lengths (*)	
Min 18" Max 72"	Min 10" Max 72"	Min 10" Max 72" Max 45° tilt
¹ Not available with Asymmetric.	² Not available with DMNC/DMRM/DR canopy options, or for 4" long cylinders when specified with CDR and integral driver. ³ The total stem length (*) includes the 1" swivel base located inside the canopy.	

AERA 4" CYLINDER


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Color Quality

COLOR QUALITY - 3500K


TM-30 R _r	90
TM-30 R _g	100
CRI	90+
R9	> 50



Photometrics

PENDANT

Values calculated based on 3500K, bevel baffle, and SDL lens option.

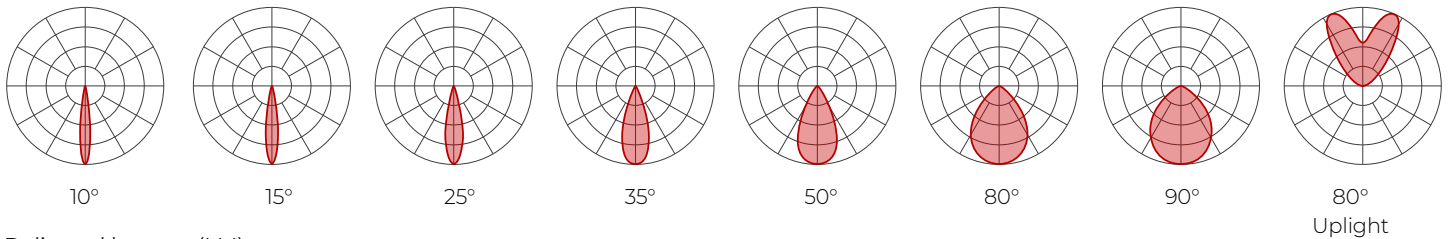

Delivered lumens (LM)

BEAM	80+ CRI								90+ CRI								95+ CRI							
	10°	15°	25°	35°	50°	80°	90°	Uplight	10°	15°	25°	35°	50°	80°	90°	Uplight	10°	15°	25°	35°	50°	80°	90°	Uplight
14 W	1347	1497	1538	1481	1451	1306	1306	1102	1259	1399	1437	1384	1356	1220	1220	1029	969	1077	1106	1066	1044	940	940	792
20 W	1880	2089	2146	2066	2026	1823	1823	1550	1757	1952	2006	1931	1893	1704	1704	1448	1353	1503	1545	1487	1458	1312	1312	1114
28 W	2524	2804	2882	2775	2719	2447	2447	NA	2359	2621	2693	2593	2541	2287	2287	NA	1816	2018	2074	1997	1957	1761	1761	NA

Efficacy (LM/W)

BEAM	80+ CRI								90+ CRI								95+ CRI							
	10°	15°	25°	35°	50°	80°	90°	Uplight	10°	15°	25°	35°	50°	80°	90°	Uplight	10°	15°	25°	35°	50°	80°	90°	Uplight
14 W	96	107	110	106	104	93	93	79	90	100	103	99	97	87	87	74	69	77	79	76	75	67	67	57
20 W	94	104	107	103	101	91	91	78	88	98	100	97	95	85	85	72	68	75	77	74	73	66	66	56
28 W	90	100	103	99	97	87	87	NA	84	94	96	93	91	82	82	NA	65	72	74	71	70	63	63	NA

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, baffle styles, baffle colors, lensing and accessories will change the lumen value.

CCT	BAFFLE STYLE AND COLOR			LENS * (At baffle)		ACCESSORIES * (At light element)	
2200K	Bevel	White	1	SDL - Soft diffused lens, Solite	1	LSDL - Soft diffused lens, Solite	1
2400K		Black	1				
2700K	Pinhole	White	0.92	FDL - Frosted lens	0.8	LFDL - Frosted lens	0.8
3000K		Black	0.92	CL - Clear lens	1.1	LS - Linear spread	0.84
3500K	Decorative bevel	White	1	NOL - No lens	1.1	HEX - Hex louver	0.86
4000K		Black	1	* When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory. e.g. NOL + LSDL + LS = 1.1 x 1 x 0.84 = 0.924			
5000K							

DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\left(\frac{\text{DIRECT LM} + \text{UPLIGHT LM}}{\text{DIRECT W} + \text{UPLIGHT W}} \right) = \text{LPW}$$

For SOLA and DUO, please consult factory.



AERA 4" CYLINDER


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Photometrics

PENDANT ASYMMETRIC

Values calculated based on 3500K, bevel baffle, and SDL lens option.

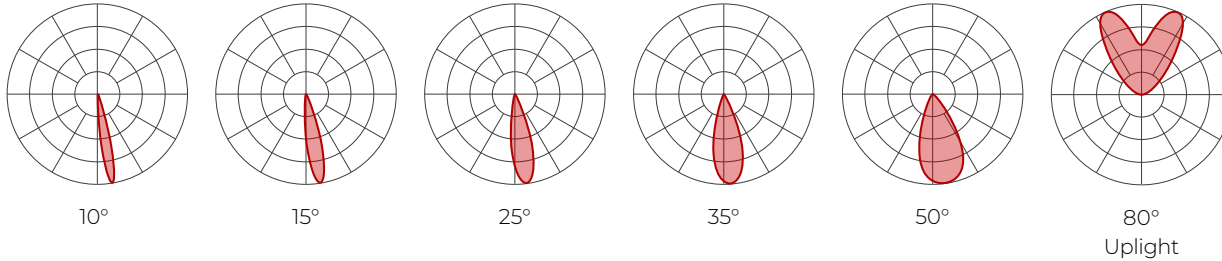

Delivered lumens (LM)

CRI	80+ CRI						90+ CRI						95+ CRI					
	BEAM	10°	15°	25°	35°	50°	Uplight	10°	15°	25°	35°	50°	Uplight	10°	15°	25°	35°	50°
14 W	941	1045	1097	1089	1119	1102	879	977	1025	1018	1046	1029	677	752	789	784	805	792
20 W	1499	1665	1746	1734	1782	1550	1400	1556	1632	1621	1665	1448	1078	1198	1257	1248	1282	1114
28 W	2012	2235	2344	2328	2393	NA	1880	2089	2191	2176	2236	NA	1448	1609	1687	1676	1722	NA

Efficacy (LM/W)

CRI	80+ CRI						90+ CRI						95+ CRI					
	BEAM	10°	15°	25°	35°	50°	Uplight	10°	15°	25°	35°	50°	Uplight	10°	15°	25°	35°	50°
14 W	67	75	78	78	80	79	63	70	73	73	75	74	48	54	56	56	58	57
20 W	75	83	87	87	89	78	70	78	82	81	83	72	54	60	63	62	64	56
28 W	72	80	84	83	85	NA	67	75	78	78	80	NA	52	57	60	60	61	NA

MULTIPLIERS

Please follow the multiplier tables to ensure correct lumen value. Beams, CCT, baffle styles, baffle colors, lensing and accessories will change the lumen value.

CCT		BAFFLE STYLE AND COLOR			LENS * (At baffle)		ACCESSORIES * (At light element)	
2200K	0.80	Bevel	White	1	SDL - Soft diffused lens, Solite	1	LSDL - Soft diffused lens, Solite	1
2400K	0.87		Black	1	FDL - Frosted lens	0.8	LFDL - Frosted lens	0.8
2700K	0.94	Pinhole	White	0.92	CL - Clear lens	1.1	LS - Linear spread	0.84
3000K	0.98		Black	0.92	NOL - No lens	1.1	HEX - Hex louver	0.86
3500K	1	Decorative bevel	White	1	* When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory. e.g. NOL + LSDL + LS = 1.1 x 1 x 0.84 = 0.924			
4000K	1.05		Black	1				
5000K	1.05							

For SOLA and DUO, please consult factory.

DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\left(\frac{\text{DIRECT LM} + \text{UPLIGHT LM}}{\text{DIRECT W} + \text{UPLIGHT W}} \right) = \text{LPW}$$

AERA 4" CYLINDER


PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



Technical Specifications

OPTIC

XPoint™ Refraction Technology optics provide precise optical control in a remarkably compact form. Micro optical paths from the chip on board converge and then disperse in precise beam angles, resulting in a crisp and exacting light quality.

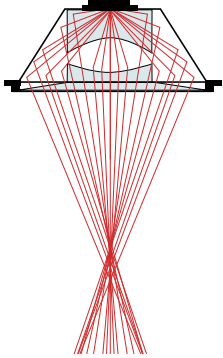

LIGHT SOURCE

Static white

Compact COB (Chip-On-Board) LED module, available in 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, and 5000K with a choice of 80+ CRI, 90+ CRI, or 95+ CRI, with elevated R9 value for 90+ CRI and above. Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

Chromawerx SOLA

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. Two color temperature range options are offered: 3000K to 1800K, and 2700K to 1800K. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.

Chromawerx DUO

Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool to warm LED arrays - maintaining a CRI above 90. Two color temperature range options are offered: 6500K to 2700K, and 5000K to 2700K. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency > 84%, PF > 0.9, THD < 20%. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

Integral: 0-10V, ELV, TRIAC

Remote: 0-10V, ELV, TRIAC, Lutron Hi-Lume 1% EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V, DMX, Lutron DALI-2 digital

Emergency battery option: Remotely-installed, long-life, high-temperature, maintenance-free, Bodine Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. IOTA and Fulham options available upon request. Minimum of 90 minutes operation, and recharge time of 24 hours. For fixtures less than 10 W, the battery provides 6 W of emergency light output. For fixtures 10 W and over, the battery provides 10 W.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing: Die-cast and extruded aluminum

Power cord: Black and white PVC, 18" to 72" standard length (Pendant option only)

Stem: Ø 1/2" rigid stem and swivel stem 10" to 72" standard length

Canopy: Flat, conduit feed, direct, and deep

Finish: Matte white, matte black, champagne, and dark bronze. Custom colors also available (provide RAL #). Satin silver and matte silver finishes are also available for Baffle.

Heat sink: Die-cast aluminum

Baffle: Die-cast aluminum

Baffle style: Bevel, pinhole, and decorative bevel

AERA 4" CYLINDER

PENDANT, PENDANT ASYMMETRIC
DIRECT/INDIRECT, DIRECT



WEIGHT

Direct/Indirect	Direct
6" : 3 lbs - 1.4 kg	4" : 2.2 lbs - 1 kg
8" : 3.4 lbs - 1.5 kg	8" : 2.9 lbs - 1.3 kg
12" : 4 lbs - 1.8 kg	12" : 3.4 lbs - 1.5 kg

LENS AND ACCESSORIES



Soft diffused lens, Solite



Frosted diffused lens



Clear lens



Linear spread



Hex louver

ENVIRONMENT

Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Title 24 JA8: California Building Standards Code

Declare: [LBC Red List Approved](#)

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.