VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

Lumenwerx

Declare.

5 YEAR WARRANTY 5 5 YEAR WARRANTY

Inner corner

Our elegant, flexible Via family is composed of linear, pendant, surface, recessed, and wall mounted luminaires. Each lighting fixture can be installed as a discrete luminaire or in continuous runs or patterns in which a combination of luminaires forms part of a custom design that can also incorporate less conventional acute and obtuse angles. Via 3 Surface is offered with Lambertian, asymmetric, wall wash, or grazing reflector optics.

DIRECT

HLO ARO2 WRO2 GRO

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Intertek

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

PoE

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

Project: _____

_____

Type: _____

Order Guide

A drawing of your pattern is required - anything from a line drawing to an architectural drawing.

LUMINAIRE ID	DISTRIBUTION	OPTIC	LENS POSITION	LIGHT SOURCE [2]	CRI
VIA3SPAT	**D**				
VIA3SPAT - Via 3" Surface Pattern	**D** - Direct	**HLO** - High-Efficiency Lambertian Optic **ARO2** - Asymmetric Refractive Optic **WRO2** - Wall Wash Refractive Optic **GRO** - Grazing Reflector Optic	**FH** [1] - Flush **0.5D** [1] - 0.5" drop **1.0D** [1] - 1.0" drop [1] • For HLO, specify FH, 0.5D, or 1.0D. • For ARO2, WRO2, and GRO, specify FH.	**SOLA** - Dim-to-warm single channel control 35K to 22K **DUO** - Tunable white 2-channel control 65K to 27K [2] Static white, BIOS, and Chromawerx QUADRO also available. Consult other spec sheets.	**80CRI** - 80+ CRI **90CRI** - 90+ CRI

LUMEN PACKAGE	PATTERN LENGTH	CORNER TYPE [6]	VOLTAGE
350LMF [3] - Hypo output 350 lm/ft **500LMF** - Low output 500 lm/ft **750LMF** - Medium output 750 lm/ft **1000LMF** - High output 1000 lm/ft **1200LMF** [4] - Hyper output 1200 lm/ft [3] Minimum 3' fixture. [4] Fixture will be very bright. Use in suitable applications.	**##FT##IN(#X#FT#IN-#X#FT#IN-...)** [5] - ##FT##IN: total nominal length of pattern in feet and/or inches #X: quantity of each section #FT#IN: nominal length of each section in feet and/or inches Continuous runs: lengths over 12' [5] • Minimum 2'. • Minimum 4' for DMX.	**#LEV2C(A##)** - 2-way leveled corner **#LEV3C(A##)** [7,8] - 3-way leveled corner **#LEV4C(A##)** [7,8] - 4-way leveled corner **#INN2C(A90)** [8,9] - 2-way inner corner ANGLE (A##): **(A60)** [8] - 60° **(A90)** - 90° **(A120)** - 120° **(A##)** [10] - Custom [6] Specify quantity (#) and angle (A##) for each required corner type. If more than one option is specified, separate codes with a "+", e.g. 1LEV2C(A90)+2LEV2C(A60). [7] Separate angles with a "+" if more than one type is required, e.g. 1LEV4C(A60+A120). [8] Not available with ARO2/WRO2/GRO. [9] Available with 90° only. Consult factory for other angles. [10] Minimum angle is 45°. For ARO2/WRO2/GRO, minimum angle is 75°.	**120V** - 120V **277V** - 277V **UNV** - 120V-277V

DRIVER [11]	ELECTRICAL	MOUNTING CEILING	MOUNTING WALL [14]	FINISH	OPTION
	1C				
SOLA **SD1** - Single 0-10V input DUO **DMX** [12,13] - DMX **DDA** [13] - DALI DT6 **DDA8** [13] - DALI DT8 **DD1** - Dual 0-10V input for CCT/intensity **LD2** [13] - Lutron DALI-2 digital [11] PoE (Power-over-Ethernet) compatible. Consult factory for details. [12] For more information, see pages 8 to 13. [13] On-site commissioning is required.	**1C** - 1 circuit	**DRC** - Drywall ceiling **GRD** - Grid ceiling	**DRM** - Drywall mounting **DMB** - Drywall mounting bracket **NA** - Not applicable [14] Not available with leveled corners.	**W** - Matte white **AL** - Aluminum **B** - Matte black **CF#** - Custom finish, specify RAL#	**FU120** - Fuse 120V **FU277** - Fuse 277V **NA** - None

Accessories

Optional, order separately

WALL CONTROLLER [15]

DMX	DD1
WCW##FT [16] - DMX wall controller white **WCB##FT** [16] - DMX wall controller black	**TWCW##FT** [17] - Dual 0-10V wall controller white **TWCB##FT** [17] - Dual 0-10V wall controller black

[15] Specify wire length (##) in feet.
[16] Available with DMX only. For more information, see pages 8 to 13, or consult factory.
[17] Available with DD1 only. For more information, see page 14, or consult factory.

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

Dimensions

Flush Lens



0.5" Drop Lens [1]



1.0" Drop Lens [1]



[1] Drop lens positions available with HLO only.

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify
product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

Pattern Layout

CORNER TYPES

	LEVELED CORNERS			INNER CORNER
2-way	 1LEV2C(A90)			 1INN2C(A90)
3-way	 1LEV3C(A60+A120)	 1LEV3C(A90+A90)	 1LEV3C(A120)	
4-way	 1LEV4C(A90)	 1LEV4C(A60+A120)		

EXAMPLES



8FT(2X4FT)-1LEV2C(A90)



14FT(2X4FT-2X3FT)-4LEV2C(A90)



7FT(1X3FT-1X4FT)-1INN2C(A90)

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

Photometrics

Values calculated based on a 4' fixture at 3500K for all optics.

HLO (Flush lens)



LM/FT	W/FT	LM/W
350	2.8	125
500	4.1	123
750	6.3	119
1000	8.6	116
1200	10.6	113

ARO2



LM/FT	W/FT	LM/W
350	3.0	116
500	4.4	113
750	7.0	107
1000	9.7	103
1200	12.1	99

WRO2



LM/FT	W/FT	LM/W
350	3.0	116
500	4.4	112
750	7.0	107
1000	9.8	102
1200	12.1	99

GRO

LM/FT	W/FT	LM/W
350	3.3	108
500	4.8	104
750	7.6	99
1000	10.6	94
1200	13.2	91

MULTIPLIER TABLES

Use these tables to get results for different color temperatures and drop lenses for all photometric tables.

SOLA

CCT	WATTS 80+ CRI / 90+ CRI	LPW 80+ CRI / 90+ CRI
3500K	1.00	1.00

DUO

CCT	WATTS 80+ CRI / 90+ CRI	LPW 80+ CRI / 90+ CRI
2700K	1.05	0.95
6500K	1.00	1.00

Multiplier - Drop lens

DIRECT LENS	WATTS	LPW
Flush lens	1.00	1.00
Drop lens 0.5"	0.98	1.02
Drop lens 1.0"	0.96	1.04

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

Technical Specifications

OPTICS

High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. Available as a flush lens or as a drop lens, the HLO has a spacing criterion of 1.10.

Asymmetric Refractive Optic (ARO2)

The Asymmetric Refractive Optic (ARO2) uses a sophisticated reflector combined with a matte beam-shaping film to create a smooth, effective downward light component without shadows or hot spots. It provides directional Gaussian light distribution with peak intensity at 20° above nadir and a 55° Full Width at Half Maximum (FWHM) beam angle. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

Wall Wash Refractive Optic (WRO2)

The Wall Wash Refractive Optic (WRO2) delivers smooth vertical illumination with a gentle gradient and soft visual cut-off. Its exacting configuration creates a strong downward light component without shadows or hot spots and provides light distribution with peak intensity at 21° above nadir. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

Grazing Reflector Optic (GRO)

The Grazing Reflector Optic (GRO) is oriented to project light with maximum luminous intensity at 5° from nadir. This provides a tight beam to highlight and accentuate a wall with subtle vertical illumination.

LIGHT SOURCE

Custom linear array of alternating color temperature mid-flux LEDs are mounted directly to the housing for optimal thermal performance. For the DUO products, a color temperature range from 6500K-2700K is achievable with color points on or below the black body curve. For the SOLA products, a color temperature range from 3500K-2200K is controlled synchronously with intensity. Color consistency between fixtures is maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Chromawerx SOLA

It is a single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple analog control sends a common signal to dual output digital drivers, which are programmed to adjust a specially populated LED array to emulate the effect of dimming a filament source. Dimming range is programmable but the default option runs from 3500K at 100% of full power to 2200K at 5% of full power. CRI is maintained above 80 throughout the dimming range.

Chromawerx DUO

It is a two-channel control. It uses an analog (0-10V) protocol for separate control of luminaire CCT and intensity or a digital (DMX, DALI, and LD2) protocol for synchronous control of both warm and cool LED arrays to enable the user to set color temperature and light output. Commonly called "tunable white", Chromawerx two-channel control provides the range of cool (6500K) to warm (2700K) color that can be useful for helping to entrain circadian rhythms, stimulate alertness for improved educational and work productivity, and compensate for jet lag, among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. CRI is maintained above 80. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

ANSI C78.377-2015

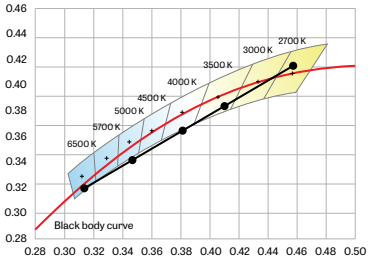

PATTERN LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

ELECTRICAL

SOLA

SD1

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Using a single 0-10V control signal, the light output warms in color temperature as it dims down to 1% and 2200K. At maximum driver load, efficiency<86%, PF>0.9, THD<20%.

DUO

DMX

Factory-set adjustable output current electronic driver with 120-277 VAC line input. Using DMX wall controls (optionally supplied by Lumenwerx) or an existing DMX control system, both channels of LEDs are independently adjustable. Each DMX driver can be independently addressed using the built-in RDM (Remote Device Management) in the field. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency<84%, PF>0.9, THD<20%.

DALI

Factory-set adjustable output current electronic driver with 120-277 VAC line input. Using an existing DALI control system (supplied by others), one control channel adjusts the fixture color temperature, and the other control channel adjusts fixture brightness. With DALI Type 6, two DALI addresses are required to control both channels. With DALI Type 8, one DALI address is required to control both channels. Dimming down to 1% is attainable. Rated life (90% survivorship) of 50,000 hours at 50°C maximum ambient temperature. At maximum driver load, efficiency<84%, PF>0.9, THD<20%.

DD1

Factory-set adjustable output current LED driver with universal (120-277 VAC) input. Controlled via two individual 0-10V signals, one for setting light output down to a minimum of 1% and the other for adjusting the CCT (default range of 6500K-2700K). Rated life of 50,000 hours at 70°C maximum driver case temperature and 100% load conditions. Typical efficiency of 86%, PF>0.9, THD<20% at 100% load conditions.

LD2

Lutron DALI-2 digital drivers provide a high-performance tunable white solution with single-address digital control. Guaranteed performance and compatibility when used with Lutron DALI-2 controls.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

MOUNTING

Fixtures can be mounted directly to T-bar, drywall and hard surface ceilings, hardware supplied by others. Long runs require a minimum of 6" from the vertical wall.

FINISH

Interior: 95%, reflective matte powder coated white paint
Exterior: Matte white, matte black, or aluminum powder coating. Custom finishes are also available.

CONSTRUCTION

Housing: Extruded aluminum, up to 90% recycled content
Interior brackets: Die-formed cold rolled sheet steel
Joining system: Die-cast zinc
Reflectors: Die-formed cold rolled steel, 95% reflective matte white painted
Lens: Acrylic
Drop lens: Extruded with glued end caps
End caps: Die-cast aluminum

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.
Declare: LBC Red List Approved

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.
Wall controllers are covered by the manufacturer warranty.

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

DUO DMX SPECIFICATION

A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

Please answer the following questions to help us identify your DMX network requirements.

Do you require a wall controller provided by Lumenwerx?

YES

DMX controller supplied by Lumenwerx

NO

DMX control system supplied by others. Lumenwerx will supply DMX-enabled fixtures with default DMX addressing.
See following pages for technical DMX informations. ✓

How many zones do you have?
A zone consists of one or more luminaires behaving identically.

1 - 4 Zones

Do you have more than 32 drivers in total?

NO

Order a standard Lumenwerx wall controller.

WALL CONTROLLER

WCW - wall controller white
WCB - wall controller black

Add the control code at the end of your order code.
Please provide a fixture layout or RCP (Reflected Ceiling Plan) showing the locations of the DMX fixtures, zones and the DMX wall controller.
Refer to your DMX integrator for the installation. ✓

YES

Subject to factory evaluation. Please contact our controls specialist at controls@lumenwerx.com
Additional cost and equipment will be required. ✓

To Calculate # of drivers

How to calculate the required number of drivers:

per 4' fixture	per 4' fixture
Driver	Driver Driver
1x driver	2x driver
Direct only	Direct high output

5 or more Zones

Subject to factory evaluation ans approval. Please contact our controls specialist at controls@lumenwerx.com
Additional cost and equipment will be required. ✓

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

GENERIC DMX NETWORK ARCHITECTURE

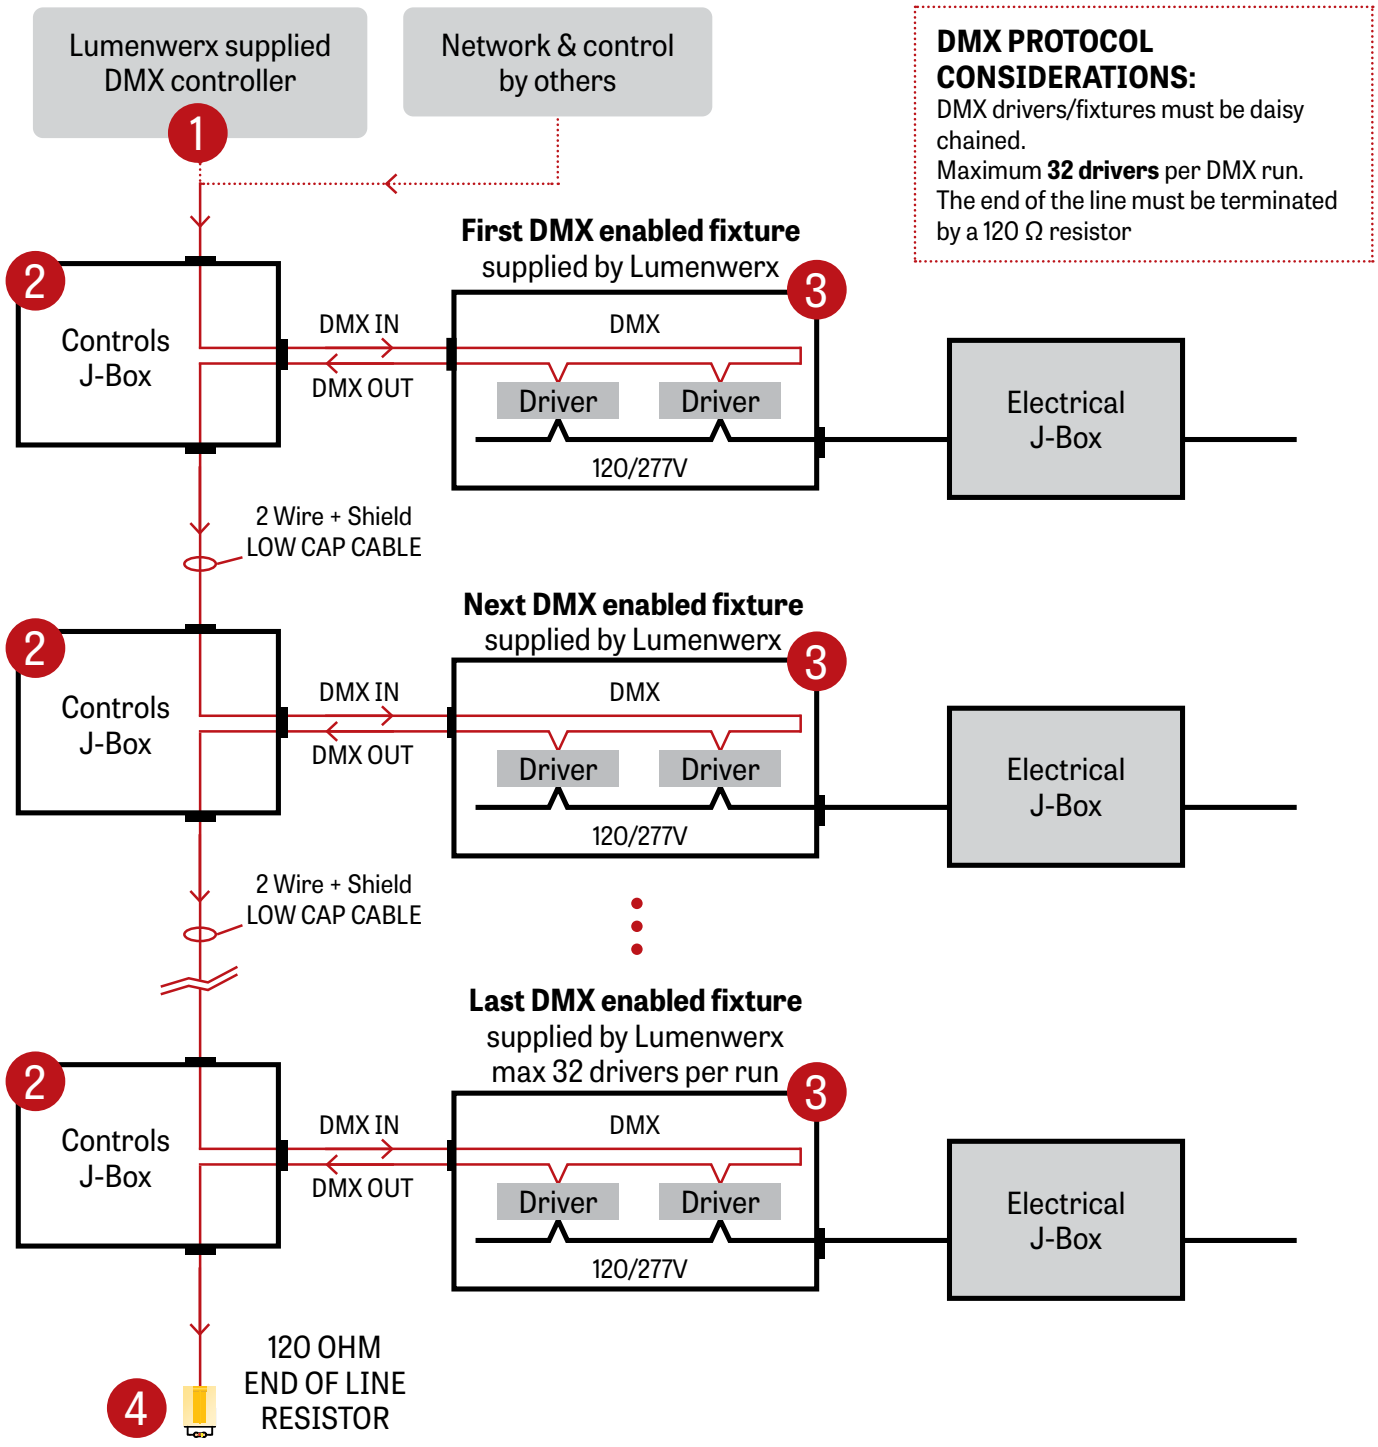

DMX PROTOCOL CONSIDERATIONS:

DMX drivers/fixtures must be daisy chained.

Maximum **32 drivers** per DMX run.

The end of the line must be terminated by a 120 Ω resistor

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

1 LUMENWERX SUPPLIED DMX CONTROLLER

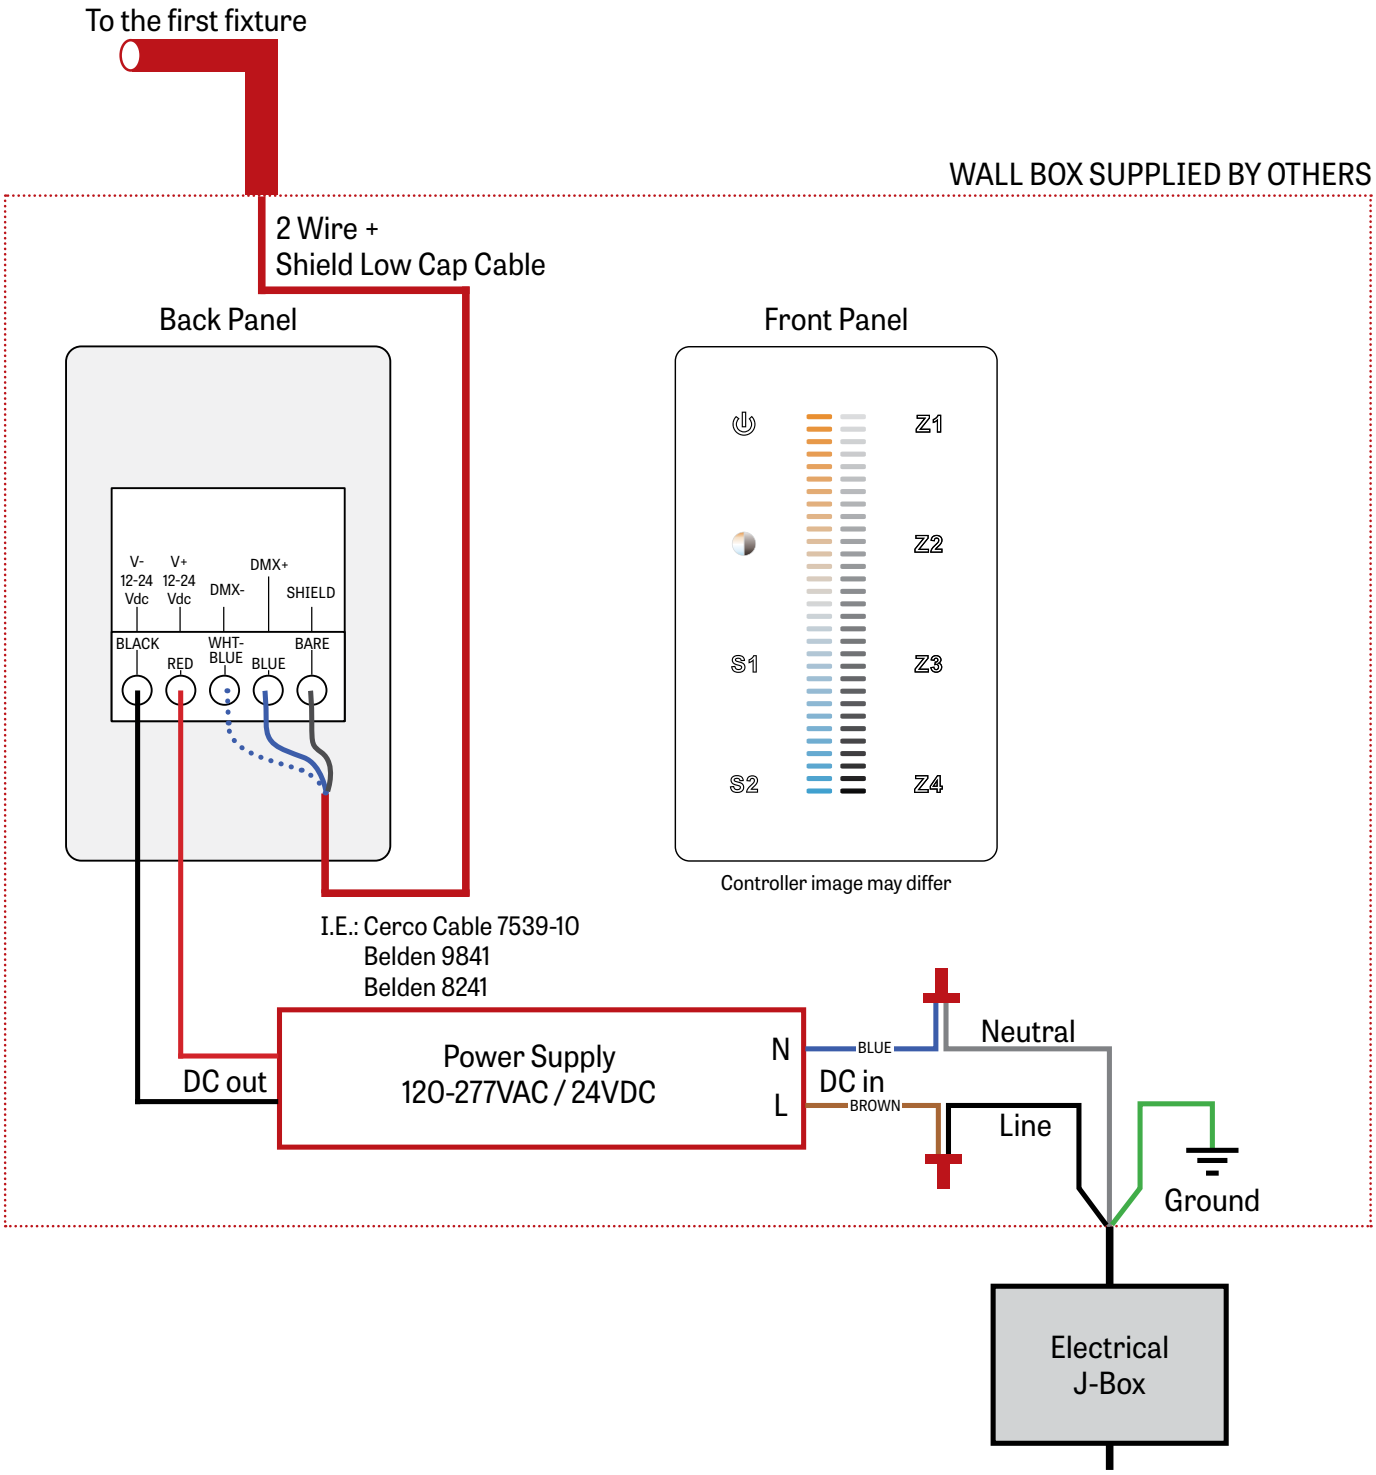

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify
product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

2 J-BOX DMX DAISY CHAIN DETAIL

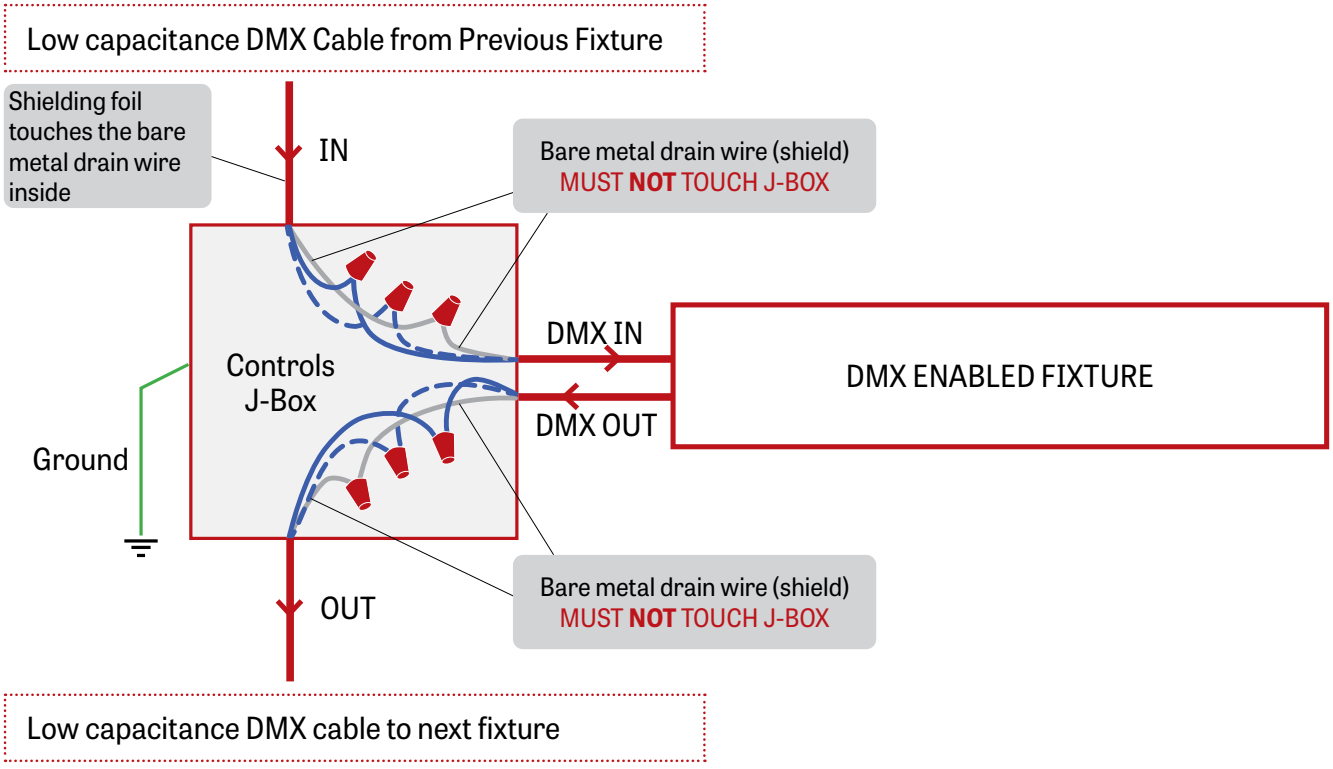

3 DMX CONNECTION RECESSED & SURFACE

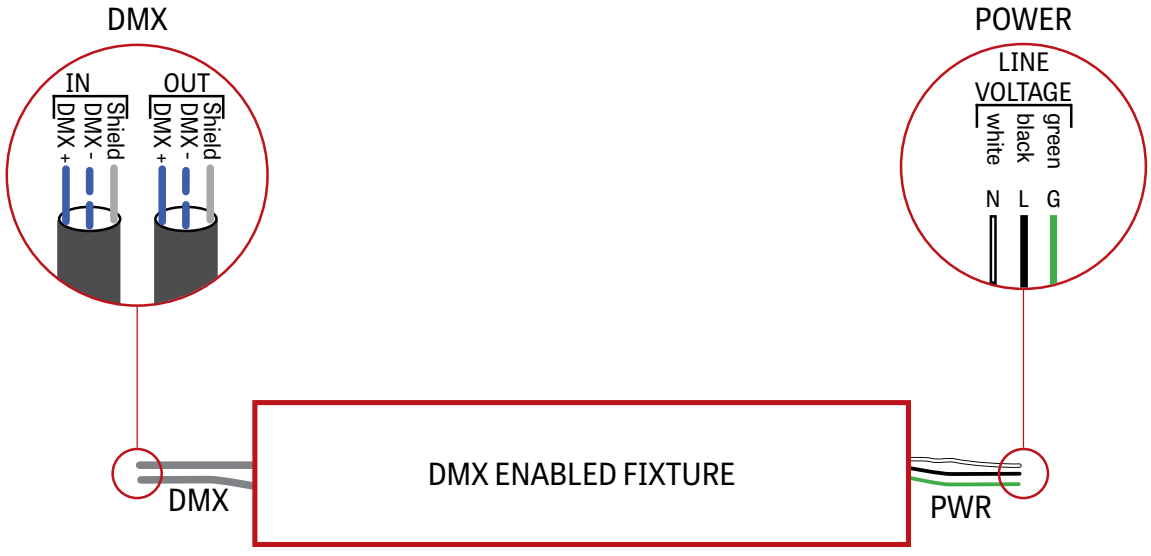

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

4 DMX LAST FIXTURE DETAIL

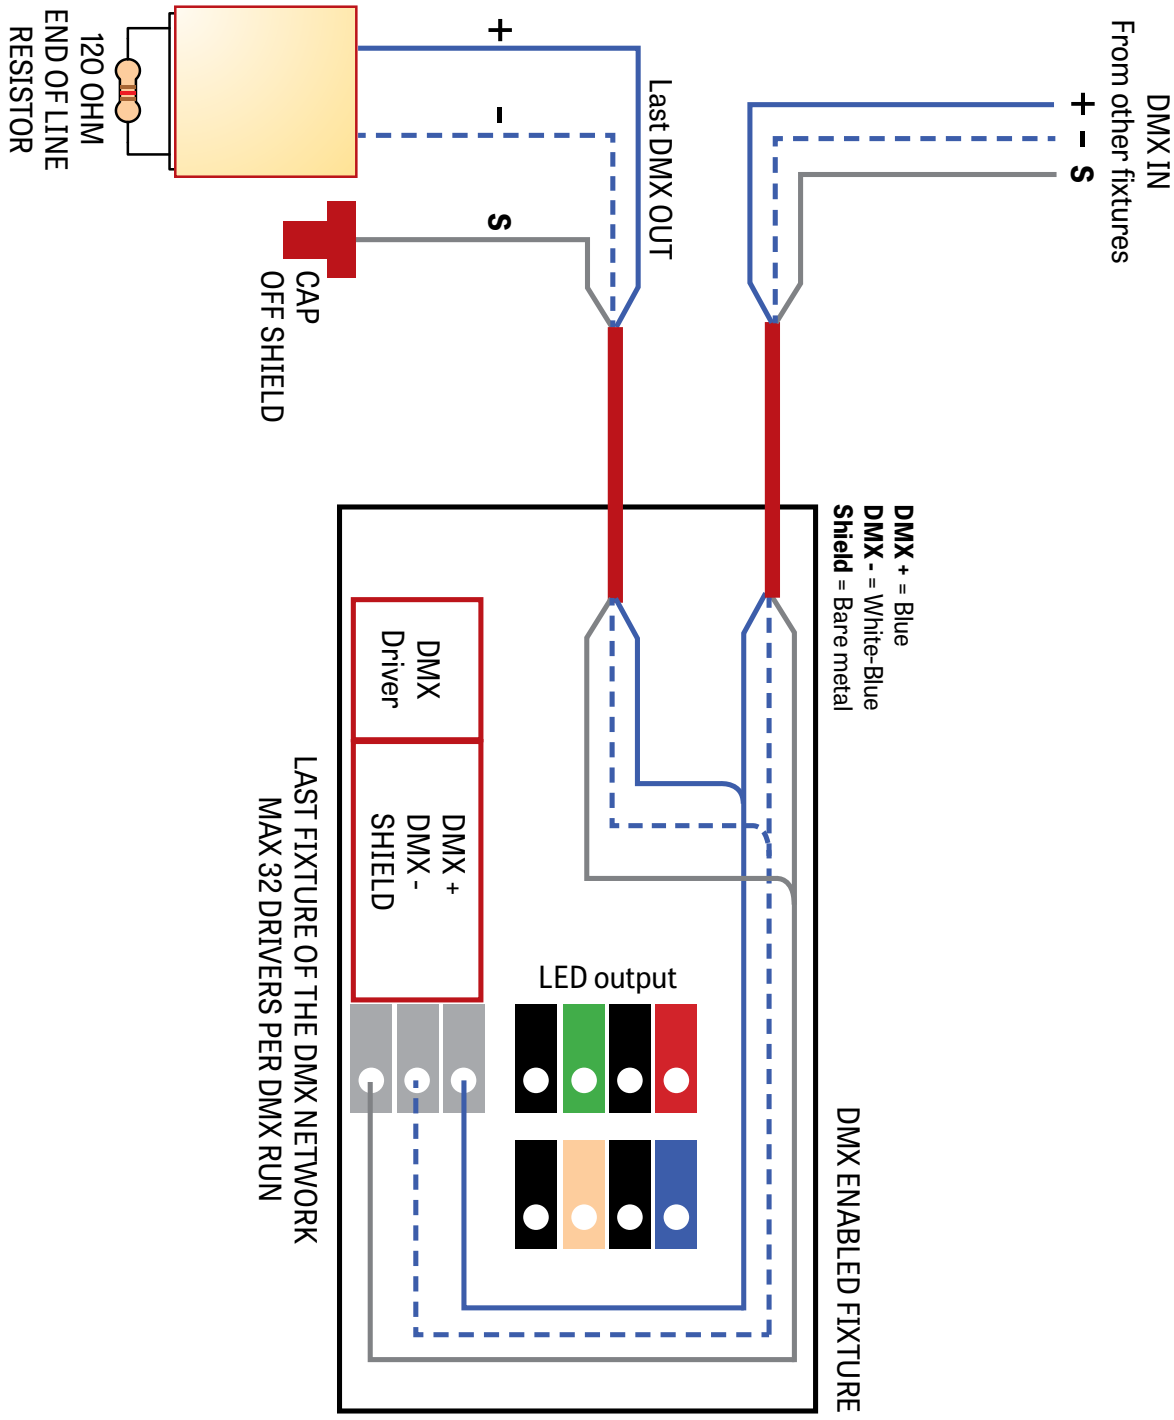

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

DMX WALL CONTROLLER

DUO 1-4 ZONE

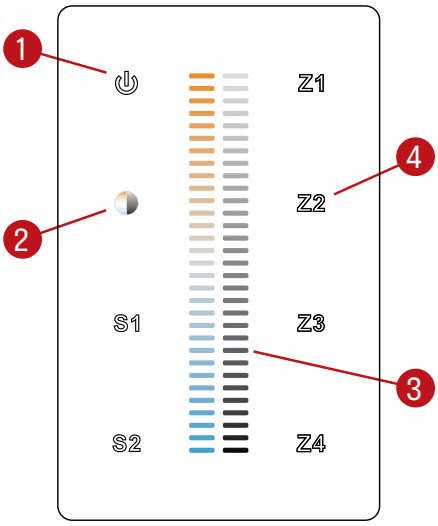

(1) Power:	Use this button to turn ON or OFF the fixture.
(2) Brightness/CCT:	Use the color/brightness toggle button to choose between color/brightness. When Blue: brightness is selected, when Yellow: color is selected.
(3) Slider:	Depending on the mode chosen in step 2, the slider will allow the user to set desired color or brightness.
(4) Zone select:	Up to 4 zones can be selected either independently or together. Once selected, the commands will be sent to the zone identified by a Blue LED.

Default DMX Addresses:

1 Warm
2 Cool

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025

VIA 3 SURFACE PATTERN

DIRECT

CHROMAWERX - SOLA, DUO

DUAL 0-10V WALL CONTROLLER

Front Panel

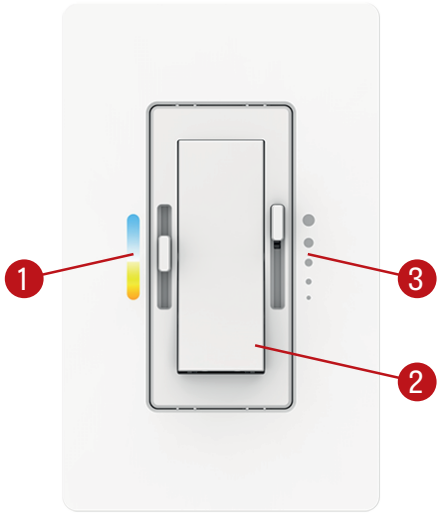

Controller image may differ

Dimensions

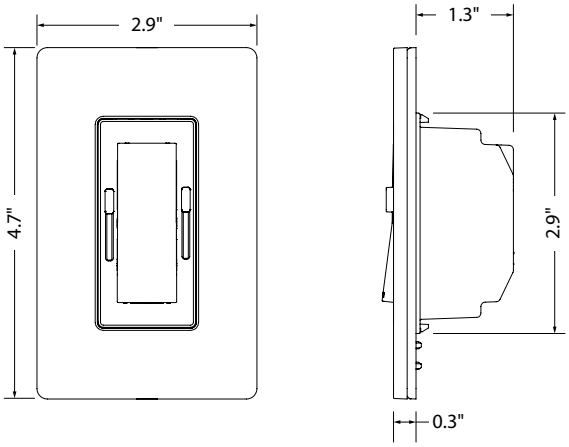

(1) CCT control: Use this button to adjust the color temperature.

(2) On/Off switch: Use this button to turn ON or OFF the fixture.

(3) Dimming control: Use this button to adjust the brightness.

Wiring Diagram

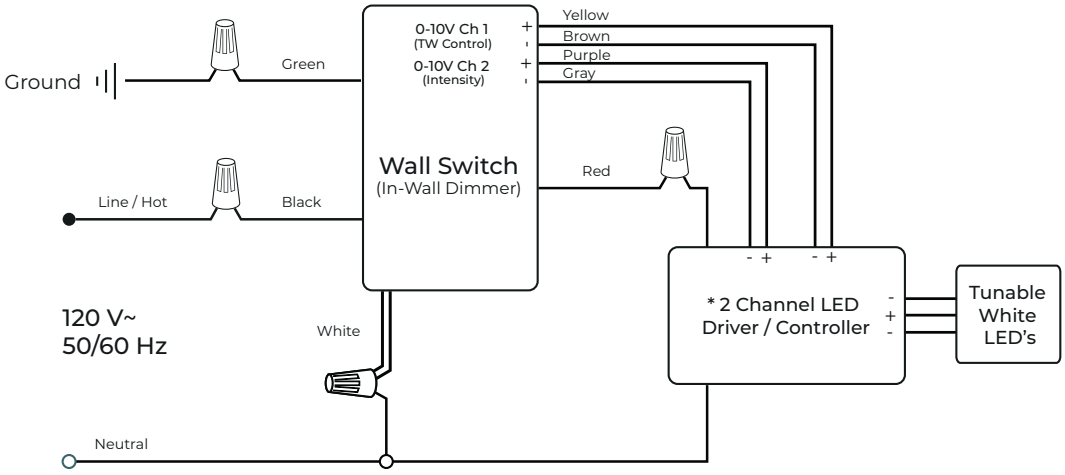

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931 -4862
www.lumenwerx.com

Lumenwerx reserves the right to modify product specifications without notification.
© Lumenwerx, ULC. All rights reserved.

VIA3-TW-SURFACE-PAT-SPEC-REV2 October 9, 2025