


# CAVA SQUARE LED

SURFACE

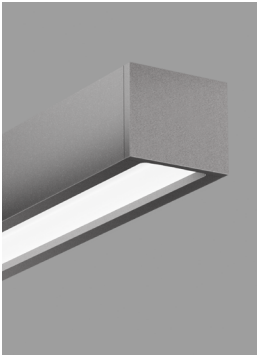

## DESCRIPTION

**Cava** is a linear LED recessed, surface and pendant luminaire with a remarkably comfortable and surprising appearance. Using completely concealed and indirect LED arrays, Cava provides superior brightness control, while maintaining high efficacy by distributing light over the vaulted interior cavity of the luminaire. See separate spec sheets for other available design and mountings.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

NOTES: \_\_\_\_\_



**SENSORS**  
For latest information on sensors, click [here](#).



**up to 99 lm/w performance**

## ORDER GUIDE


CAVSS	CO	RLO	SW			
LUMINAIRE ID	END CAP	OPTIC	LIGHT SOURCE	CRI	LUMEN PACKAGES	COLOR TEMP.
CAVSS - cava square surface	CO - closed end cap	RLO - Reduced Luminance Optic	SW - Static white	80 - 80CRI 90 - 90CRI	350 - min. low output 350lm/ft 500 - medium output 500lm/ft 750 - max. high output 750lm/ft #### - other required lm/ft	27 - 2700k 30 - 3000k 35 - 3500k 40 - 4000k

LUMINAIRE LENGTH	VOLTAGE	DRIVER	ELECTRICAL	MOUNTING
Standard sections - 2', 3', 4', 5', 8' & 12' For all other specify length #FT - nominal length in feet Continuous Run - for luminaires over 12'	120 - 120V 277 - 277V UNV - 120V-277V 347 <sup>1</sup> - 347V <sup>1</sup> Available with D1 driver only.	D1 - 1% 0-10V DA <sup>2</sup> - DALI LDE1 <sup>2</sup> - Lutron Hi-Lume 1% Eco <sup>2</sup> On-site commissioning is required.	1 - 1 circuit + #EB - emergency battery (min 4' fixture, except Lutron) + #EM - emergency light circuit + #NL - night light circuit + GTD### - generator transfer device, 120V or 277V	GRD - grid ceiling DRC - drywall ceiling OHC - other ceiling (specify)

FINISH	CONTROL <sup>3</sup>	CONNECTED CONTROLS <sup>8</sup>	OPTIONS
W - matte white AL - aluminum B - matte black CF# - custom finish specify RAL#	STANDALONE CONTROLS <sup>4,5</sup> Specify the quantity (#) of sensors per fixture. #OMS <sup>6</sup> - Onboard Occupancy #OMS## <sup>7</sup> - Onboard Occupancy with bi-level dimming #ODS - Onboard Daylight #OCS - Onboard Occupancy & Daylight	LU - Lutron AWN <sup>8</sup> - Lutron Athena Wireless Node RF Only AWNS - Lutron Athena Wireless Node Sensor ENC - Encelium	WL - Cooper Wavelinx AN - Acuity nLight CA - Casambi LG - Legrand
	NA - None		FU120 - Fuse 120V FU277 - Fuse 277V TB# - T-bar caddy clip specify grid size TG# - Tegular caddy clip specify grid size ST - Screw Slots caddy clip CU - custom
	<sup>3</sup> Standalone and connected control options cannot be combined. <sup>4</sup> Available with D1 driver and 1 circuit options only. <sup>5</sup> Minimum 4' per zone. Provide control zone length.	<sup>6</sup> Fixture turns off when no occupancy. <sup>7</sup> Fixture dims to specified light level % (##). <sup>8</sup> Consult factory for connected controls.	

## CROSS SECTION

See page 2 for ordering code detailed information

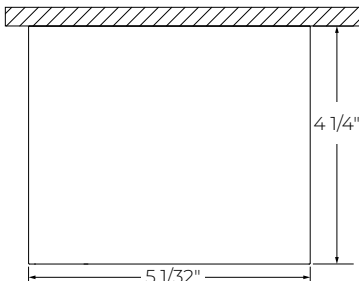

CAVSS - surface



### OPTIC

**REDUCED LUMINANCE OPTIC (RLO)** - reduced Luminance Optic (RLO) consists of indirect-mounted LED arrays illuminating a vaulted reflector with a matte white finish greater than 95% reflectivity. The ultra-shallow arrays in RLO completely conceal the light source while evenly distributing brightness over the entire surface of the cavity using a combination of multiple reflective bounces and a very high diffuse reflectivity. Compared to diffusing optics, RLO reduces luminaire brightness due to the visible interior surface being larger than the aperture.

### LIGHT SOURCE - LED


Custom linear array of mid-flux LED's are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

### PERFORMANCE PER 4' AT 4000K

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	4000K	14	1400	99
medium output	4000K	20.5	2000	98
high output	4000K	31.5	3000	95

### LUMINAIRE LENGTH

Cava is made up of standard 2, 3, 4, 5, 8 and 12 foot sections that may be joined together to create longer continuous run lengths. Nominal run length must be noted in the product code. The minimum individual section available is 2 foot. All individual sections are joined together onsite using the joiner kits provided. LumenWerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

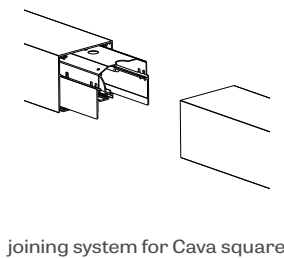

### ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% Eco and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

### EMERGENCY

Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation, up to 1000 lumens per 4ft (25°C) emergency lighting output. Recharge time of 24 hours.

### MOUNTING OPTIONS

Fixtures can be mounted directly to T-Bar, drywall and hard surface ceilings, hardware supplied by others. Long runs require a minimum of 6" distance from the vertical wall.

### FINISH

**Interior** - 95%, reflective matte powder coated white paint  
**Exterior** - matte white, matte black or aluminum powder coating.  
 Custom finishes are also available.

### CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



### Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Three types are available:

**OMS:** An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

QDS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

QCS: Both an occupancy and a daylight sensor are installed in the luminaire.

### Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.

Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.

Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

### CONSTRUCTION

**Housing** - Extruded Aluminum 0.075" nominal, matte white or aluminum powder coating.

**End cap** - Die cast Aluminum (0.95" nominal)

**Joiners** - Die cast Aluminum (0.95" nominal)

**Reflectors** - Extruded Aluminum 0.07" nominal, 95% reflective matte white painted

### WEIGHT

**Cava square 4ft** - 26.02lbs - 11.8kg

**Cava square 8ft** - 52.04lbs - 23.6kg

**Cava square 12ft** - 78.06lbs - 35.4kg

### CERTIFICATION

**ETL** - Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

### WARRANTY


LumenWerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. LumenWerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

# CAVA SQUARE LED

SURFACE




## 350 LUMEN AT 80CRI - LOW OUTPUT

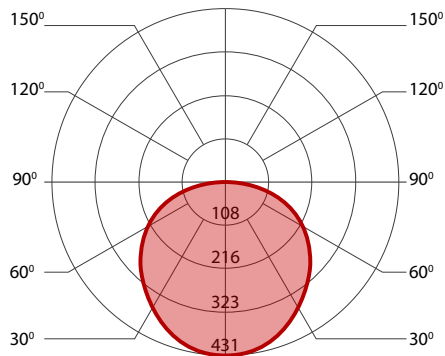

### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	2700K	14.5	1400	96
low output	3000K	14.5	1400	98
low output	3500K	14	1400	99
low output	4000K	14	1400	99


## 500 LUMEN AT 80CRI - MEDIUM OUTPUT

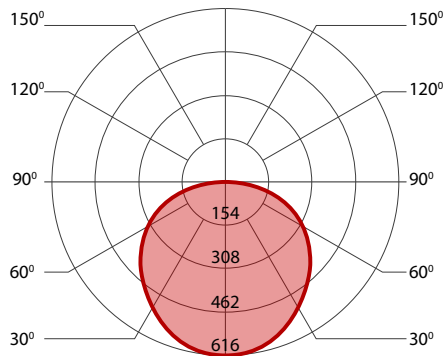

### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
medium output	2700K	21.5	2000	94
medium output	3000K	20.5	2000	97
medium output	3500K	20.5	2000	98
medium output	4000K	20.5	2000	98

## 750 LUMEN AT 80CRI - HIGH OUTPUT

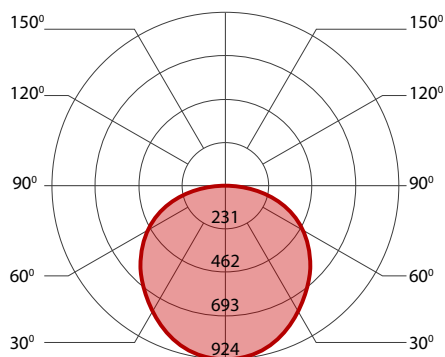

### PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
high output	2700K	33.5	3000	90
high output	3000K	32	3000	94
high output	3500K	31.5	3000	95
high output	4000K	31.5	3000	95