

CLUSTER PI


PENDANT

MRO OPTIC




Cluster Pi M MRO

Cluster Pi with Miniature Reflector Optic (MRO) integrates the beauty and quality of our Cluster family into a fixture that illuminates through a circular array of light cells. The luminaire features a low profile of under 2" and can be recessed, surface, or pendant mounted. Of the three available sizes—Small (3.5"), Medium (6.5"), and Large (9")—the Medium and Large recessed models are designed to accommodate an add-on luminaire centrally positioned within its circular array.

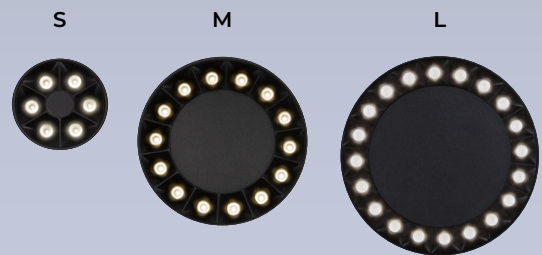

Cluster Pi Family (Refer to other spec sheets)

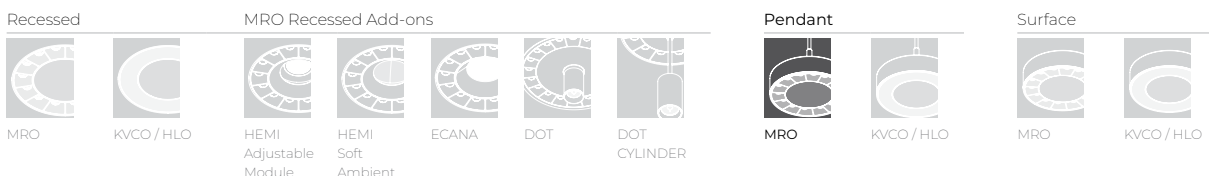

CLUSTER PI

PENDANT

MRO OPTIC



Project: _____

Type: _____

SENSORS
For latest information on sensors, click [here](#).



Order Guide

LUMINAIRE ID	FIXTURE FINISH	LOUVER	LOUVER FINISH	REVEAL FINISH	CENTER BLANK FINISH
		SQR			
CLUPISPMRO - Cluster Pi S Pendant MRO CLUPIMPROM - Cluster Pi M Pendant MRO CLUPILPMRO - Cluster Pi L Pendant MRO	FTMW - Textured matte white FTMB - Textured matte black CF# - Custom finish, specify RAL#	SQR - Square	MF01 - Matte white MF04 - Matte black AM07 - Matte silver	FTMW - Textured matte white FTMB - Textured matte black CF# - Custom finish, specify RAL#	FTMW - Textured matte white FTMB - Textured matte black CF# - Custom finish, specify RAL#

LIGHT SOURCE	OPTIC	BEAM	CRI	COLOR TEMPERATURE	VOLTAGE	LUMEN PACKAGE ¹
SW	MRO		90CRI			
SW - Static white	MRO - Miniature Reflector Optic	NFL - Narrow flood FLD - Flood WFL - Wide flood	90CRI - 90 CRI	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	120V - 120V 277V - 277V UNV - 120V-277V	S 890LM - 890 lm M 2100LM - 2100 lm L 2750LM - 2750 lm <small>¹Delivered lumens at 90 CRI, 3500K.</small>


DIMMING ²	CANOPY TYPE	CANOPY FINISH	SUSPENSION	
CANOPY DRIVER ³ DI ⁴ - 1% 0-10V ELV ^{4,5,6} - ELV 120V TRI ^{4,5,6} - TRIAC 120V REMOTE DRIVER ⁷ RD1 - 1% 0-10V RELV ⁵ - ELV 120V RTRI ⁵ - TRIAC 120V RLDE1 ^{6,8} - Lutron Hi-Lume 1% Eco RDA ⁸ - DALI RELD1 - eldoLED 1% ECOdrive 0-10V RELDO - eldoLED 0.1% SOLOdrive 0-10V RPEQO ^{4,8} - Lutron Hi-Lume Premier 0.1% EcoSystem <small>² PoE (Power-over-Ethernet) compatible. Consult factory for details. ³ Only available with DR canopy. ⁴ Not available with Cluster Pi M. ⁵ Available with 120V only. ⁶ Not available with Cluster Pi S. ⁷ A remote driver box is provided, see page 4 for details. ⁸ On-site commissioning is required.</small>	FLR ⁹ - Flat round canopy, 4" octagonal junction box CDR ⁹ - Conduit feed, round canopy DR ¹⁰ - Deep round canopy, driver in canopy <small>⁹ Available with remote driver only. ¹⁰ Available with canopy driver only.</small>	FTMW - Textured matte white FTMB - Textured matte black CF# - Custom finish, specify RAL#	POWER CORD ¹¹ BPC###IN - Black PVC WPC###IN - White PVC CF#####IN ^{12,13} - Custom color fabric, consult factory <small>¹¹ Min 18" - max 72", specify length (##) in inches. ¹² Not available with D1 dimming option. ¹³ Specify fabric color (#).</small>	STEM ¹⁴ BKS###IN - Textured black stem WHS###IN - Textured white stem BKSS###IN ¹⁵ - Textured black swivel stem WHSS###IN ¹⁵ - Textured white swivel stem CF#S###IN ¹⁶ - Custom finish stem CF#SS###IN ^{15,16} - Custom finish swivel stem <small>¹⁴ Min 10" - max 72", specify length (##) in inches. ¹⁵ Not available with DR canopy. ¹⁶ Specify RAL#.</small>

CLUSTER PI

PENDANT
MRO OPTIC




Overview

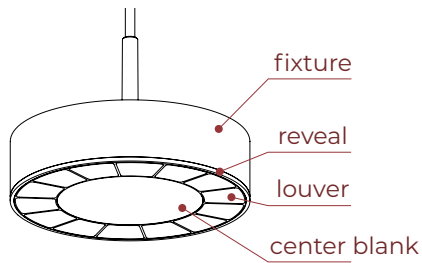


Dimensions





Cluster Pi S



Cluster Pi M

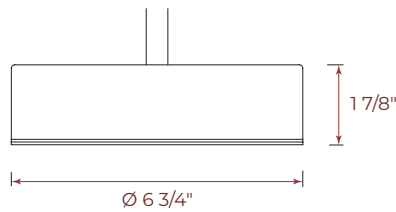

Cluster Pi L

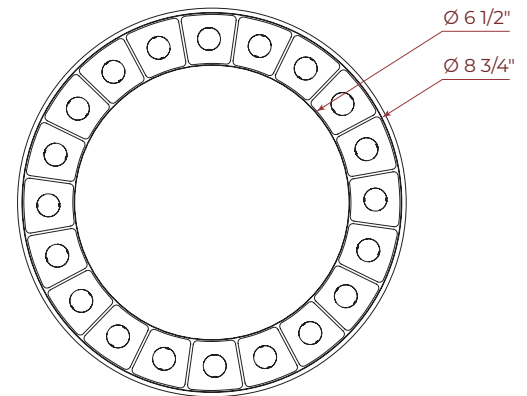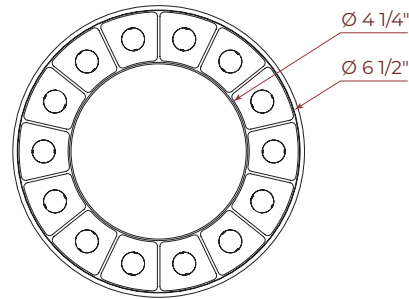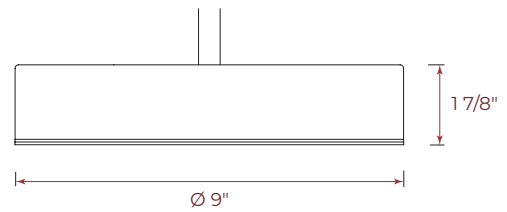

CLUSTER PI

PENDANT

MRO OPTIC



Mounting


CANOPY TYPE

	CANOPY DRIVER		REMOTE DRIVER	
	DR	FLR	FLR	CDR
	Deep round canopy	Flat round canopy	Flat round canopy	Conduit feed round canopy
CANOPY SIZE	Ø 5 5/8" Height 1 3/8"	Ø 4 1/2" Height 3/8"	Ø 4 1/2" Height 3/8"	Ø 5 1/2" Height 1 15/16"

SUSPENSION

POWER CORD		STEM	
PVC	Fabric ¹	Stem	Swivel stem ^{2,3} Max 45° tilt
Power cord length (*): Min 18" - Max 72"		Stem Length (*): Min 10" - Max 72"	
¹ Not available with DI dimming option.		² Not available with DR canopy. ³ The total stem length (*) includes the 1" swivel base located inside the canopy.	


REMOTE DRIVER BOX




	RDB8	RDB18
A	10"	20"
B	8"	18"
DRIVER	RD1 - 1% 0-10V RELV - ELV 120V RTRI - TRIAC 120V RPEQO - Lutron Hi-lume Premier 0.1% EcoSystem	RLDE1 - Lutron Hi-lume 1% Eco RDA - DALI RELD1 - eldoLED 1% ECOdrive 0-10V RELD0 - eldoLED 0.1% SOLOdrive 0-10V

Photometrics


Values calculated based on 3500K and 90 CRI.



NFL - Narrow flood, 25°



FLD - Flood, 35°



WFL - Wide flood, 55°

	LM	W	LM/W
S	890	15	59
M	2100	30.6	70
L	2750	44.6	62

MULTIPLIER TABLE

Use the table to get results for different color temperatures.

Multiplier - CCT/CRI

CCT	WATTS	LPW
	90 CRI	90 CRI
2700K	1.15	0.87
3000K	1.08	0.93
3500K	1	1
4000K	0.97	1.03
5000K	0.93	1.08

CLUSTER PI

PENDANT

MRO OPTIC



Technical Specifications

OPTIC

Miniature Reflector Optic (MRO)

The Miniature Reflector Optic (MRO) is composed of molded Total Internal Reflection (TIR) elements placed over the LED emitter, along with precise parabolic reflectors that further shield the light source. The resulting beam is soft with a feathered edge.

LIGHT SOURCE

Compact COB (Chip-On-Board) LED module, available in 2700K, 3000K, 3500K, 4000K, and 5000K with 90 CRI and elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

ELECTRICAL

Unless otherwise specified, dimming down to 1%. At maximum driver load: efficiency > 84%, PF > 0.9, THD < 20%.

Canopy driver: 0-10V, ELV, TRIAC

Remote driver: 0-10V, ELV, TRIAC, Lutron Hi-Lume EcoSystem, DALI, eldoLED 0.1% SOLOdrive 0-10V, eldoLED 1% ECOdrive 0-10V

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

CONSTRUCTION

Housing: Die-cast aluminum

Cover: Cold rolled steel

MRO lens: Polycarbonate

Power cord: Black and white PVC, custom color fabric. 18" to 72" standard length.

Stem: Ø 1/2" rigid stem and swivel stem 10" to 72" standard length

Canopy: Flat, conduit feed, and deep

Finish: Textured matte white and matte black. Custom colors also available (provide RAL #).

WEIGHT

Cluster Pi S: 1.3 lbs - 0.6 kg

Cluster Pi M: 2.8 lbs - 1.3 kg

Cluster Pi L: 4.4 lbs - 2 kg

CERTIFICATION

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.