


COMPASS


BUTTON - BULB - ORYO - ORYO FOCUS





INSTALLATION INSTRUCTIONS


 This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.


Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.


 Disconnect power before installation or servicing.

 Do not cover the light element lens or heatsink with any materials or adhesive tapes when the fixture is powered.

 Handle the LED cartridge carefully during removal and installation. Tools must not touch the LED chips. Contact may result in damage and LED failure.

 Wire dimming conductors as Class 1.

 A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

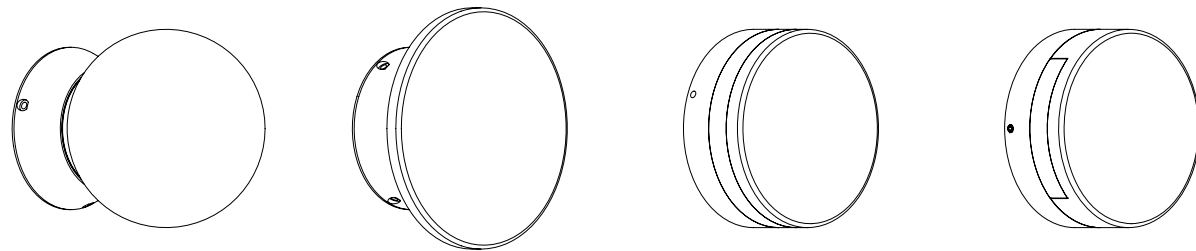

BULB

BUTTON

ORYO

ORYO FOCUS



For electrical connections, please refer to the [wiring diagram guide](#).



For remote driver box installation instructions, please refer to the [remote driver installation sheet](#).



Shown with Bulb, applies to Button, Oryo, and Oryo Focus too.



Bulb can be wall or ceiling mount. Button, Oryo, and Oryo Focus can only be wall mount.

COMPASS


BUTTON - BULB - ORYO - ORYO FOCUS



INSTALLATION INSTRUCTIONS

1 DETACH THE MOUNTING PLATE.

Loosen the set screws [A] from the fixture [B] to detach the mounting plate [C].

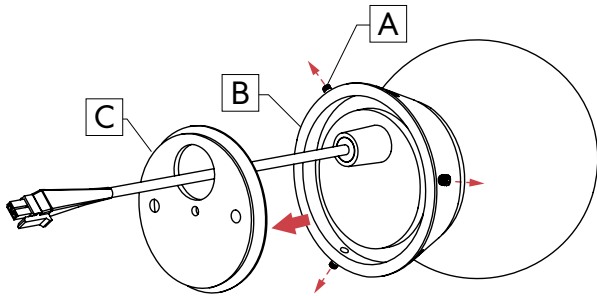


2 FIX MOUNTING PLATE.

Locate where the fixture will be installed. Use the mounting plate [C] as a model to mark a $\varnothing 1/2"$ hole.

Pierce a $\varnothing 1/2"$ hole and fix the mounting plate [C] with #6 flat head screws (by others) [D] on the wall. Use corrosion-resistant hardware for outside installations.

Note: For Oryo Focus, position the fixture on the wall with the desired direction of light before marking the holes.

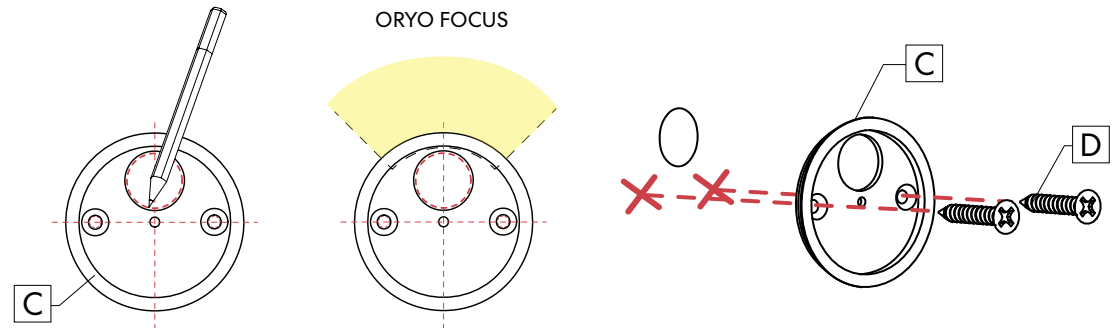


3 MAKE ELECTRICAL CONNECTIONS.

Caution: Make sure the electrical power is turned off.

Connect the main AC power cable to the remote driver box. Then, connect the remote driver box DC cable [E] to the fixture using the provided wire harness [F].

Note: A jumper cable (by others) might be necessary between the remote driver box and the fixture.

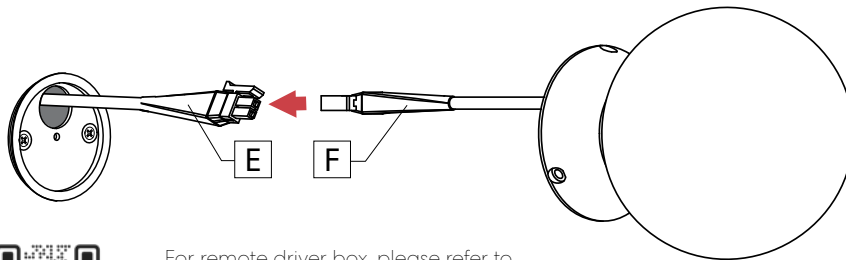

For remote driver box, please refer to the [remote driver installation sheet](#) for more information.

4 INSTALL FIXTURE.

Place the fixture [B] over the mounting plate [C] and tighten the set screws [A].

