

CURVIA 4

SHAPES


PENDANT - RECESSED - SURFACE




Declare.




Our extensive Curvia family illuminates with elegant curvilinear shapes and patterns, enhancing spaces with a soft touch and a graceful sense of movement. Available in various mounting options and sizes, Curvia luminaires feature a unique, sophisticated aesthetic that complements their technical prowess in delivering precise, powerful, and comfortable lighting solutions.

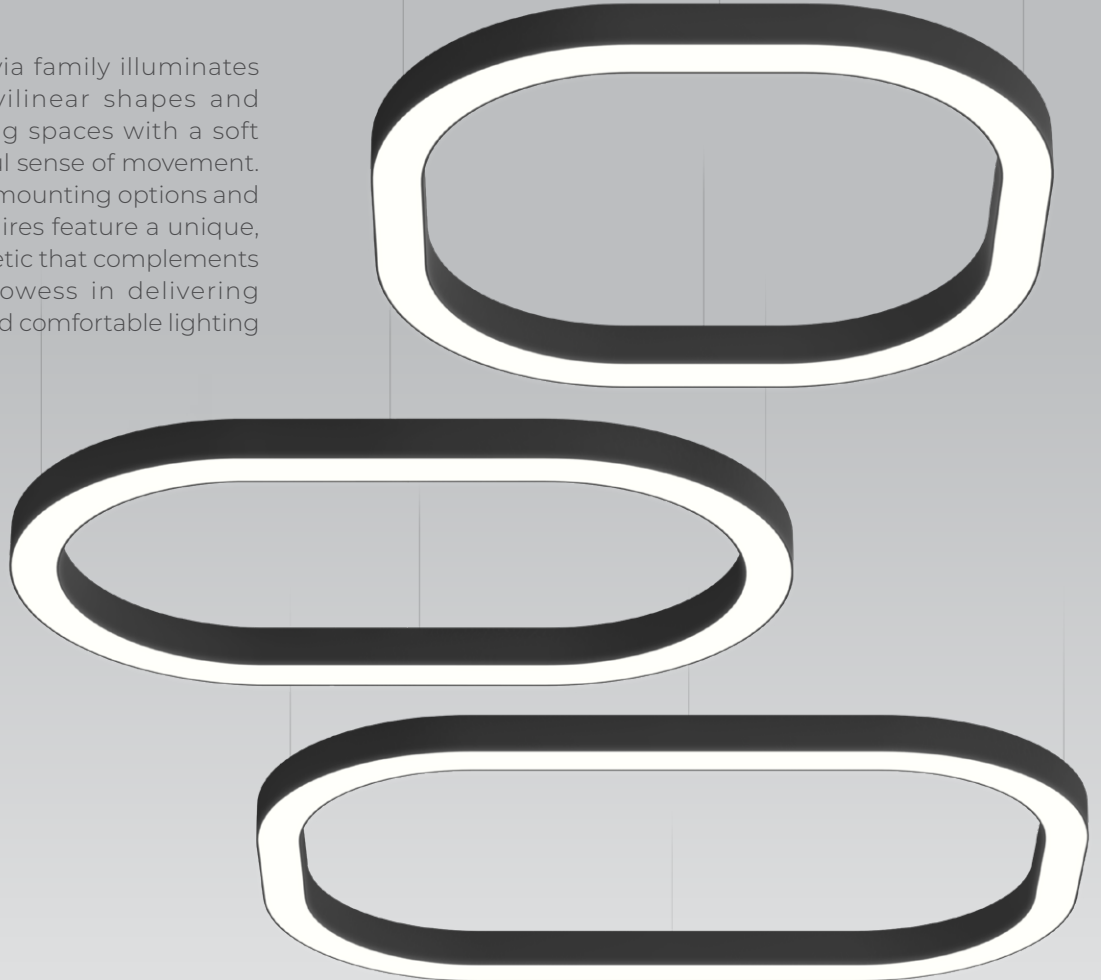


Lens Positions



Flush



Regressed lens



Semi-regressed lens

Module Options



Aera 3" Flex



Aera 2"

SENSORS
For latest information on sensors, click [here](#).



Curvia Additions Brochure

Curvia Family (Refer to other spec sheets)

Curvia Mini

1"



Ring

Curvia Slim

1", 2"



Ring
Shapes
Pattern

Curvia Slim Seal

1", 2"



Ring
Shapes
Pattern

Curvia Prism

2"



Ring
Shapes
Pattern

Curvia

2", 3", 4"



Ring
Shapes
Pattern

Curvia XYZ

2", 3"



Pattern

Curvia Horizon

2", 3"



Ring
Shapes

Curvia Perimeter

2", 3", 4", 5"



Pattern

Curvia Seal Perimeter

2", 3", 4"



Pattern

Curvia Seal

2", 3", 4"



Ring
Shapes
Pattern

Curvia Acoustix

2"



Ring
Shapes
Pattern

3737 Cote Vertu St-Laurent, Quebec, Canada H4R 2C9
T (514) 225-4304 F (514) 931-4862

www.lumenwerx.com



Lumenwerx reserves the right to modify product specifications without notification.

© Lumenwerx, ULC. All rights reserved.

CURVIA4-SHAPES-SPEC-REV6 March 24, 2026

CURVIA 4

SHAPES

PENDANT - RECESSED - SURFACE



Project: _____

Type: _____

Order Guide

LUMINAIRE ID	DISTRIBUTION	SIZE ²	CORNER RADIUS ⁵ Specify NA for Capsule	DIRECT OPTIC	LENS POSITION
<p>SQUARE</p> <p>CURV4SQP - Curvia 4" Square Pendant CURV4SQR - Curvia 4" Square Recessed CURV4SQS - Curvia 4" Square Surface</p> <p>RECTANGLE</p> <p>CURV4REP - Curvia 4" Rectangle Pendant CURV4RER - Curvia 4" Rectangle Recessed CURV4RES - Curvia 4" Rectangle Surface</p> <p>CAPSULE</p> <p>CURV4CAP - Curvia 4" Capsule Pendant CURV4CAR - Curvia 4" Capsule Recessed CURV4CAS - Curvia 4" Capsule Surface</p>	<p>DI ¹ - Direct/Indirect D - Direct</p> <p>¹Only available for pendant mounting.</p>	<p>#FT#INX#FT#IN ^{3,4} - Nominal length X nominal width</p> <p>²The real dimension of the fixture can differ up to 2.5" from the nominal size. ³Specify nominal length (#) and width (#) in 1" and/or 1" increments. ⁴Minimum size: Square 4" x 4", Rectangle 4" x 6", and Capsule 3" x 2".</p>	<p>R12 - 12" radius R18 - 18" radius R24 - 24" radius R30 - 30" radius R36 - 36" radius RXX ⁶ - Custom radius in inches NA ⁷ - Not applicable</p> <p>⁵Radii are referenced to fixture centerline. ⁶Minimum radius is 8". Consult factory for smaller radii. ⁷For Capsule, radius is defined by the size.</p>	<p>HLO - High-Efficiency Lambertian Optic AOO ⁸ - Asymmetric Opal Optic BLA ⁹ - Blank</p> <p>⁸Direction of light must be indicated on RCP/lighting plans. ⁹Specify when only modules are required.</p>	<p>FH - Flush RG ¹⁰ - Regressed SRG ^{10,11} - Semi-regressed</p> <p>¹⁰Only available with HLO. ¹¹Not available with recessed mounting.</p>
INDIRECT OPTIC Specify NA for Direct fixture	LIGHT SOURCE ¹²	CRI	DIRECT LUMEN PACKAGE ¹⁵	INDIRECT LUMEN PACKAGE ¹⁷ Specify NA for Direct fixture	COLOR TEMP.
<p>HLO - High-Efficiency Lambertian Optic NA - Not applicable</p>	<p>SW - Static white FS - Full spectrum static white</p> <p>¹²Chromawerx SOLA, DUO, and QUADRO also available. Consult factory.</p>	<p>80CRI ¹³ - 80+ CRI 90CRI ¹³ - 90+ CRI 95CRI ¹⁴ - 95+ CRI</p> <p>¹³Not available with full spectrum. ¹⁴Not available with static white.</p>	<p>350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft 1000LMF ¹⁶ - High output 1000 lm/ft 1200LMF ¹⁶ - Ultra high output 1200 lm/ft NA - Not applicable</p> <p>¹⁵To calculate the total lumens, multiply the lumen package (lm/ft) by the length of the shape (ft). ¹⁶Not available with full spectrum.</p>	<p>350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft 1000LMF ¹⁸ - High output 1000 lm/ft NA - Not applicable</p> <p>¹⁷To calculate the total lumens, multiply the lumen package (lm/ft) by the length of the shape (ft). ¹⁸Not available with full spectrum.</p>	<p>27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K</p>
VOLTAGE	DRIVER ²⁰	ELECTRICAL		ELECTRICAL SECTIONS (optional) ^{28,29}	
<p>120V - 120V 277V - 277V UNV - 120V-277V 347V ¹⁹ - 347V</p> <p>¹⁹Only available with DI driver. Subject to factory evaluation.</p>	<p>DI - 1% 0-10V ELV ²¹ - ELV 120V TRI ²¹ - TRIAC 120V DA ²² - DALI LDE1 ²² - Lutron Hi-Lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELD0 - eldoLED 0.1% SOLOdrive 0-10V</p> <p>²⁰Integral or remote subject to factory evaluation. Code will be updated with prefix "R" if factory determines driver to be remote. ²¹Only available with 120V. ²²On-site commissioning is required.</p>	<p>1C - 1 circuit 2C ²³ - 2 circuits #MC ²⁴ - Multi circuit EC - Emergency-powered fixture NL - Night light fixture DL - Daylight fixture GTD ^{25,26,27} - Generator transfer device fixture</p> <p>²³Only available for Direct/Indirect. Separate direct and indirect circuits. ²⁴Specify total number of circuits (#), including any required for electrical section options. Provide drawing or layout specifications. Minimum 4" section per circuit for integral drivers. ²⁵Integral or remote subject to factory evaluation. GTD must be housed with the driver. ²⁶Not available with 347V. ²⁷Minimum 12" radius for integral GTD.</p>	<p>#EC## ³⁰ - Emergency-powered section #NL## ³⁰ - Night light section #DL## ³⁰ - Daylight section #GTD## ^{30,31,32,33} - Generator transfer device section #EMB ^{31,32,34,35} - Emergency battery NA - None</p> <p>²⁸Specify with multi circuit (#MC) electrical option only. ²⁹Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'. ³⁰Specify quantity (#), and section length in inches (##). ³¹Integral or remote subject to factory evaluation. GTD/EMB must be housed with the driver. ³²Not available with 347V. ³³Minimum 12" radius for integral GTD. ³⁴Specify quantity (#). Each battery powers a 4' linear section. Minimum length of linear section is 5' for Direct and 8' for Direct/Indirect. ³⁵All batteries will be on the same circuit and power the direct LEDs.</p>		
MOUNTING ³⁶	FINISH		OPTIONS ³⁸		MODULE (optional) ⁴¹
<p>PENDANT ³⁷</p> <p>ACS - Aircraft cable, standard STS - Stem, standard ACC() - Aircraft cable, custom STC() - Stem, custom</p>	<p>RECESSED</p> <p>DTR - Trim DMF - Drywall mud flange</p>	<p>SURFACE</p> <p>DRC - Drywall ceiling</p>	<p>W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#</p>	<p>FU120 - Fuse 120V FU277 - Fuse 277V CTB9 ³⁹ - T-bar caddy clip, 9/16" CTB15 ³⁹ - T-bar caddy clip, 15/16" CTG9 ³⁹ - Tegular caddy clip, 9/16"</p> <p>CTG15 ³⁹ - Tegular caddy clip, 15/16" CST ³⁹ - Screw slot caddy clip FWC ⁴⁰ - Flexible whip cable (6' std) CP ⁴⁰ - Chicago Plenum NA - None</p> <p>³⁸Separate codes with a "+" if more than one is specified. ³⁹Only available with pendant mounting aircraft cable option. ⁴⁰Only available with recessed mounting.</p>	<p>#AE3FCXY() ⁴² - Aera 3" Flex Cylinder #AE2R() - Aera 2" Round Downlight NA - None</p> <p>⁴¹See page 3 for ordering details. • Only available with static white. • Only available with flush lens. • Not available with EMB. ⁴²Only available with stem when specified with pendant mounting.</p>



CURVIA 4

SHAPES

PENDANT - RECESSED - SURFACE



Module Code

- For a module, specify the options in the parentheses.
- The light source is static white.
- CRI of module matches specification of main fixture.
- Minimum 4' fixture and minimum 2' section per module. Consult factory for other configurations.

Example: 1AE3FXCY(4.5IN-FTMB-BVL-FTMB-SDL-15DEG-27K-NA-10W)

MODULE ^{1,2}	HEIGHT	CYLINDER FINISH	BAFFLE	BAFFLE FINISH	LENS AT BAFFLE	BEAM ANGLE	COLOR TEMP.	ACCESSORIES AT LIGHT ELEMENT ^{4,5}	WATTAGE
#AE3FXCY() - Aera 3" Flex Cylinder ¹ Specify quantity (#). ² 6" blank per module. Blank finish will match fixture finish.	4.5IN - 4.5"	FTMB - Matte black FTMW - Matte white FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL #	BVL - Bevel PHL - Pinhole BVLD - Decorative bevel	FTMB - Matte black FTMW - Matte white FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL #	SDL ³ - Soft diffused lens, Solite FDL ³ - Frosted diffused lens CL ³ - Clear lens NOL - No lens ³ Not available with LSDL/LFDL accessories.	15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	LSDL - Soft diffused lens, Solite LFDL - Frosted diffused lens LS - Linear spread HEX - Hex louver NA - None ⁴ Choose up to 2 options. Separate codes with a "+" if more than one is specified, e.g. LSDL+LS. ⁵ LSDL and LFDL cannot be combined. LS and HEX cannot be combined.	10W - 10 W output, up to 1132 lm 14W - 14 W output, up to 1545 lm

Example: 1AE2R(7W-10DEG-27K-SDL-FTMB)

MODULE ^{1,2,3}	WATTAGE	BEAM ANGLE	COLOR TEMP.	LENS AT BAFFLE	BAFFLE FINISH
#AE2R() - Aera 2" Round Downlight ¹ Specify quantity (#). ² 6" blank per module. Blank finish will match fixture finish. ³ Module is trimless.	7W - 7 W output, up to 714 lm 10W - 10 W output, up to 961 lm	10DEG - 10° very narrow spot 15DEG - 15° Narrow spot 25DEG - 25° Spot 35DEG - 35° Narrow flood 50DEG - 50° Wide flood	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	SDL - Soft diffused lens, solite FDL - Frosted diffused lens CL - Clear lens	FTMB - Matte black FTMW - Matte white FSPC - Satin silver FSSPC - Matte silver FCHP - Champagne FDBZ - Dark bronze CF# - Custom finish, specify RAL#

Pendant Mounting Code

Aircraft Cable

Standard

ACS - Aircraft cable, standard

- Ø 5" for power canopy
- Ø 3" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Power cord is black for black fixtures, and white for all other fixture finishes
- Aircraft cable length is 36"

Custom

Example: ACC(3NPC-72IN-W-PCB-NA)

ACC() - Aircraft cable, custom

NON-POWER CANOPY SIZE	AIRCRAFT CABLE LENGTH	CANOPY FINISH	POWER CORD COLOR	OPTION
3NPC - Ø 3" non-power canopy 5NPC - Ø 5" non-power canopy	36IN - 36" 72IN - 72" 120IN - 120" #IN ¹ - Other lengths, specify in inches	W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	PCW - White PCB - Black	SEM ² - Seismic mounting SLC ² - Sloped ceiling for aircraft cable NA - None ² Not available with the Ø 3" non-power canopy size.

Stem

Standard

STS - Stem, standard

- Ø 5" for power canopy
- Ø 5" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Stem finish is the same color as fixture
- Stem length is 18"
- Stem is not field adjustable

Custom

Example: STC(5NPC-36IN-W-STW-SLS)

STC() - Stem, custom

NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	OPTION
5NPC - Ø 5" non-power canopy	18IN - 18" 36IN - 36" #IN ³ - Specify length in inches	W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL#	STW - Matte white STAL - Aluminum STB - Matte black STCF# - Custom finish, specify RAL#	SLS - Sloped ceiling for stem NA - None

CURVIA 4

SHAPES

PENDANT - RECESSED - SURFACE




Dimensions


PENDANT

DIRECT/INDIRECT


Flush Lens



Regressed Lens

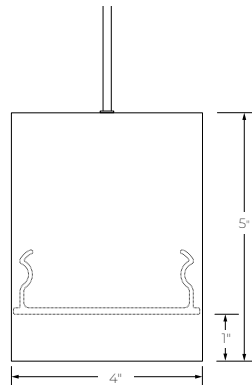


Semi-regressed Lens

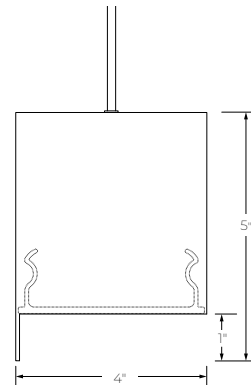


DIRECT


Flush Lens



Regressed Lens

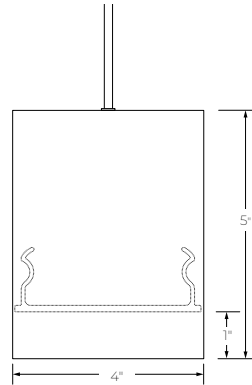


Semi-regressed Lens

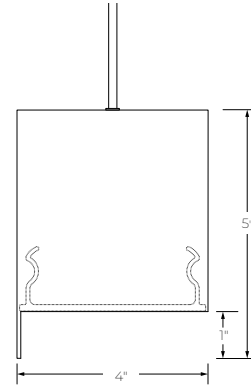


SURFACE


Flush Lens



Regressed Lens



Semi-regressed Lens



CURVIA 4

SHAPES


PENDANT - RECESSED - SURFACE




RECESSED

DTR - Trim

Flush Lens

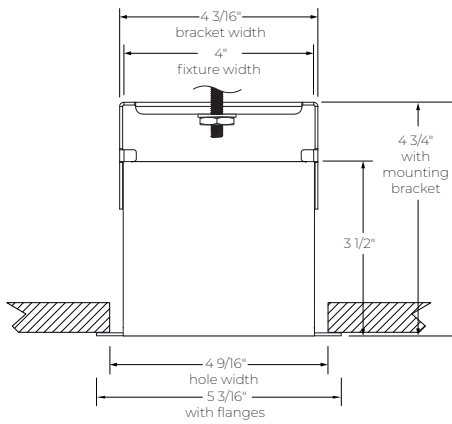


Regressed Lens

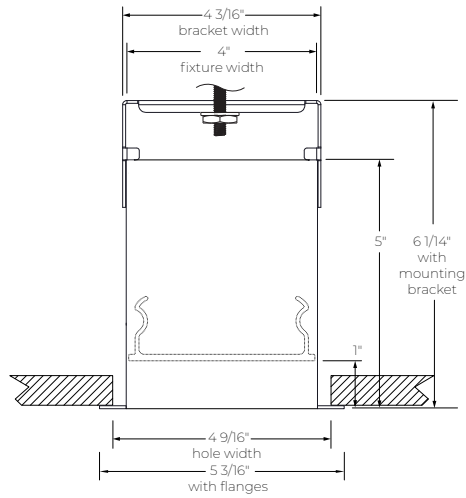


DMF - Drywall mud flange

Flush Lens

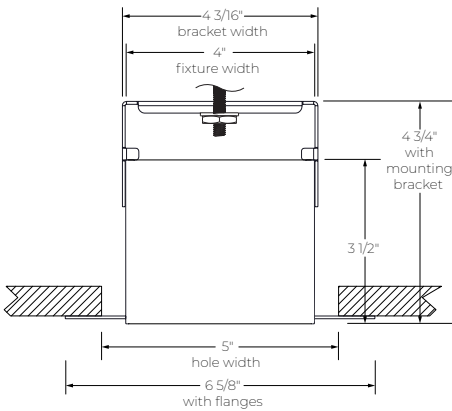

Regressed Lens

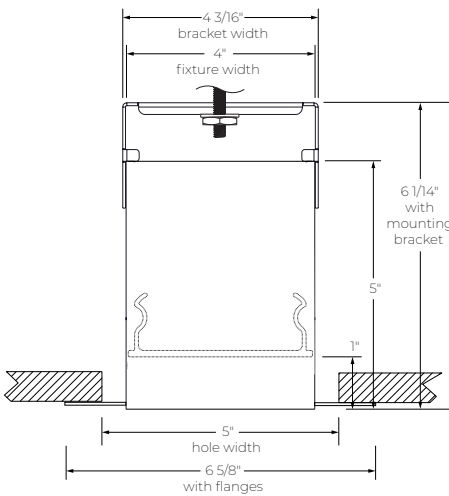

CURVIA 4

SHAPES



PENDANT - RECESSED - SURFACE



Shapes

SQUARE SHAPE


RADIUS: 12", 18", 24", 30", 36"

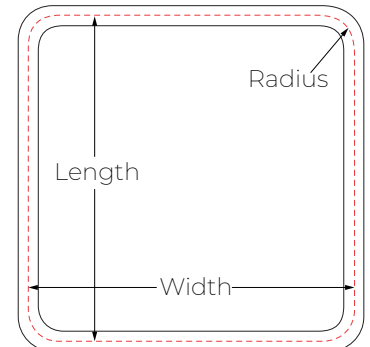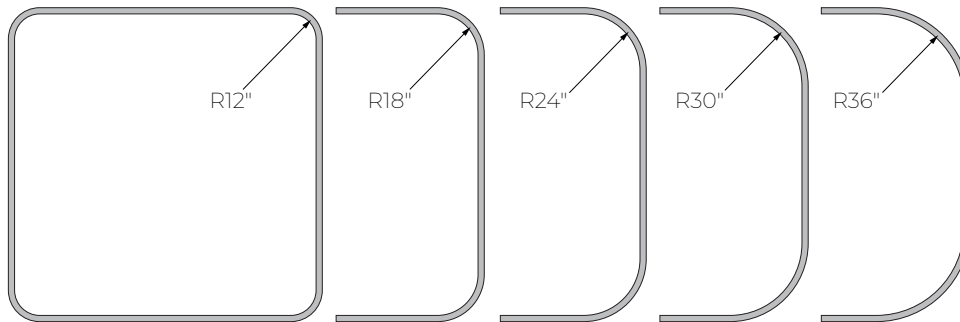

Note: The length, width and radius are measured from the center of the fixture.


RECTANGLE SHAPE

RADIUS: 12", 18", 24", 30", 36"

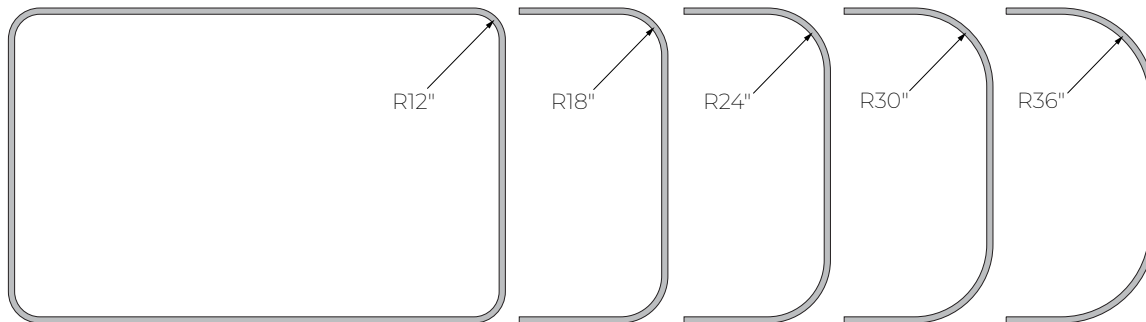

CAPSULE SHAPE

WIDTH: 24", 36", 48", 60", 72"

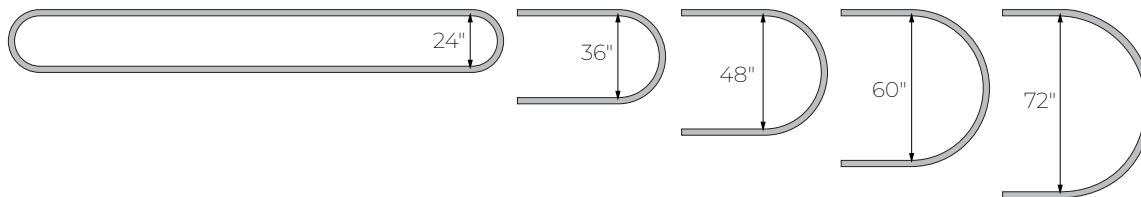

Configuration diagrams are not to scale. For visualization purposes only.

CURVIA 4

SHAPES

PENDANT - RECESSED - SURFACE




Photometrics

Values calculated based on 4' straight segments at 3500K for all optics.

DIRECT OPTICS


INDIRECT OPTIC



LM/FT	W/FT	LM/W
350	2.7	132
500	3.9	129
750	6	126
1000	8.2	122
1200	10	119



LM/FT	W/FT	LM/W
350	2.4	149
500	3.5	145
750	5.4	139
1000	7.4	134



LM/FT	W/FT	LM/W
350	3.1	112
500	4.6	110
750	7.0	107
1000	9.6	104
1200	11.9	101

MULTIPLIER TABLES

Use these tables to get results for different color temperatures and lens positions for all photometric tables.

Multiplier - CCT

CCT	WATTS		LPW
	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI
2700K	1.05		0.95
3000K	1.02		0.98
3500K	1.00		1.00
4000K	1.00		1.00
5000K	0.96		1.04

Multiplier - Lens position

DIRECT LENS	WATTS	LPW
Flush lens	1.00	1.00
Regressed lens	0.98	1.02
Semi-regressed lens	0.98	1.02

DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\left(\frac{\text{DIRECT LM/FT} + \text{INDIRECT LM/FT}}{\text{DIRECT W/FT} + \text{INDIRECT W/FT}} \right) = \text{LPW}$$

CURVIA 4


SHAPES

PENDANT - RECESSED - SURFACE



AERA 3" FLEX MODULE

Values calculated based on 3500K and SDL lens option.

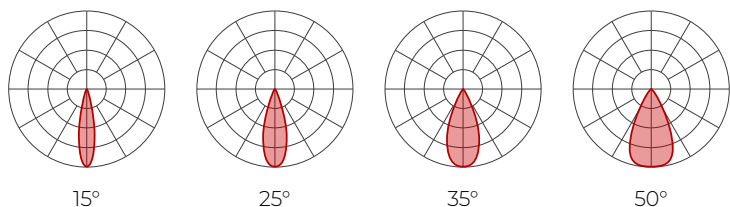

Delivered lumens (LM)


CRI	80+ CRI				90+ CRI			
	15°	25°	35°	50°	15°	25°	35°	50°
BEAM								
10 W	1056	1127	1132	1003	987	1053	1058	937
14 W	1441	1539	1545	1370	1347	1438	1444	1280

Efficacy (LM/W)

CRI	80+ CRI				90+ CRI			
	15°	25°	35°	50°	15°	25°	35°	50°
BEAM								
10 W	106	113	113	100	99	105	106	94
14 W	103	110	110	98	96	103	103	91

AERA 2" MODULE

Values calculated based on 3500K and SDL lens option.

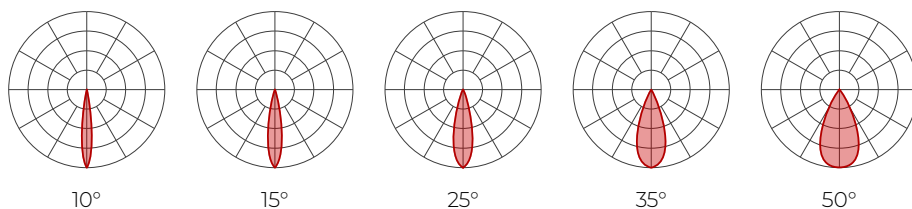

Delivered lumens (LM)

CRI	80+ CRI					90+ CRI				
	10°	15°	25°	35°	50°	10°	15°	25°	35°	50°
BEAM										
7 W	589	654	714	705	676	550	611	667	659	632
10 W	792	880	961	949	910	740	822	898	887	850

Efficacy (LM/W)

CRI	80+ CRI					90+ CRI				
	10°	15°	25°	35°	50°	10°	15°	25°	35°	50°
BEAM										
7 W	84	93	102	101	97	79	87	95	94	90
10 W	79	88	96	95	91	74	82	90	89	85

Please follow the multiplier tables to ensure correct lumen value.

CCT	
2700K	0.94
3000K	0.98
3500K	1
4000K	1.05
5000K	1.05

BAFFLE	
Bevel	1
Pinhole	0.92
Decorative bevel	1

LENS AT BAFFLE *	
SDL - Soft diffused lens, Solite	1
FDL - Frosted diffused lens	0.8
CL - Clear lens	1.1
NOL - No lens	1.1

ACCESSORIES AT LIGHT ELEMENT *	
LSDL - Soft diffused lens, Solite	1
LFDL - Frosted diffused lens	0.8
LS - Linear spread	0.84
HEX - Hex louver	0.86

* When more than one lens or accessory is specified, multiply together the value of each lens and/or accessory. e.g. NOL + LSDL + LS = 1.1 x 1 x 0.84 = 0.924

Please follow the multiplier tables to ensure correct lumen value.

CCT	
2700K	0.94
3000K	0.98
3500K	1
4000K	1.05
5000K	1.05

LENS AT BAFFLE	
SDL - Soft diffused lens, Solite	1
FDL - Frosted lens	0.8
CL - Clear lens	1.1



CURVIA 4

SHAPES

PENDANT - RECESSED - SURFACE



Technical Specifications

OPTICS

High-Efficiency Lambertian Optic (HLO)

Lumenwerx's High-Efficiency Lambertian Optic is engineered with reflective sidewalls that distribute LED output across acrylic shielding. To negotiate the curves of Lumenwerx rounded fixtures, the HLO is equipped with proprietary SupremeGrip™ technology, which keeps the optic securely in place.

Asymmetric Opal Optic (AOO)

The Asymmetric Opal Optic (AOO) provides targeted illumination while diffusing light evenly, minimizing glare and spill. Its design creates a soft, inviting ambiance, making it ideal for architectural and accent lighting in modern spaces.

LIGHT SOURCE

Static white

Custom array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operate at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Full spectrum static white

The full spectrum LED option offers improved color particularly in the cyan region that is beneficial in both healthcare and circadian lighting strategies. The cyan region in full spectrum LED is richer at the 480 nm range.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

Battery

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

MOUNTING

Pendant: Pendant fixtures can be mounted either with aircraft cable or with stem.

Recessed: Recessed fixtures can be mounted in drywall ceilings with trim or mud flange options.

Surface: Surface fixtures can be mounted directly to drywall and hard surface ceilings, hardware supplied by others. A minimum of 6" from the vertical wall is required.


FINISH

Interior: 95% reflective matte powder coated white paint.

Exterior: Matte white, matte black or aluminum powder coating. Custom finishes are also available.

AERA FLEX MODULE

Aera Flex is a round spotlight that rotates 355° and tilts 90°, available in four beam angles of 15°, 25°, 35°, and 50°. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K available in either 80+ CRI or 90+ CRI. Offered in 4.5" height with three baffle options: bevel, pinhole, and decorative bevel. Aera Flex is available in a wide range of colors.

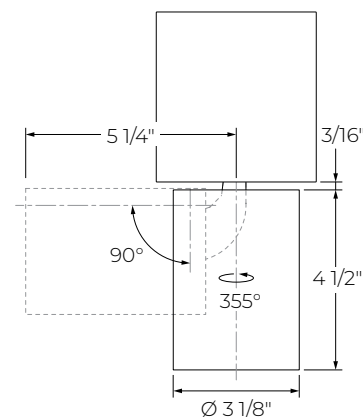

Aera 3" Flex

CURVIA 4


SHAPES

PENDANT - RECESSED - SURFACE



AERA MODULE

Aera Downlight is available in five beam angles of 10°, 15°, 25°, 35°, and 50°. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K available in either 80+ CRI or 90+ CRI. Aera Downlight is available in a wide range of colors.



Aera 2"

CONSTRUCTION

Housing: Extruded aluminum and aluminum sheet, up to 90% recycled content

Reflectors: Aluminum

Lens: Acrylic

Hanger: Chromed griplock securely attached in end caps and/or joiners with stainless steel hardware

Aircraft cable suspension: \varnothing 1/16" stainless steel aircraft cable

Stem: \varnothing 1/2" threaded steel tube

WEIGHT

Pendant Direct: 2.5 lb/ft - 1.13 kg/ft

Pendant Direct/Indirect: 3.2 lb/ft - 1.45 kg/ft

Recessed: 3.2 lb/ft - 1.45 kg/ft

Surface: 2.5 lb/ft - 1.13 kg/ft

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

IC rated: Suitable for direct contact with insulation. For Recessed mounting only.

Declare: [LBC Red List Approved](#)

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.