

Lumenwerx 

Canyon

WIDE UPLIGHT.
GENTLE DOWNLIGHT.





Canyon

Canyon is a collection of narrow linear pendant luminaires defined by a continuous 1 ¼" aperture running the length of the housing.

Fixtures measure 2 5/8" high by 4 3/8" wide and are offered in both ceiling- and wall-mounted configurations.

STANDARD LENGTH

4', 8'

LIGHT DISTRIBUTION

10/90


10% Down
90% Up

OPTICS

Precision
Micro-prism Optic
(PMO)

High-Efficiency
Lambertian Optic
(HLO)

SIZE

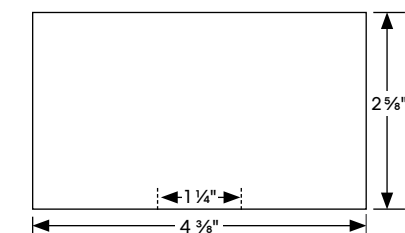




Typical Performance

Canyon provides wide uplight and gentle downlight from a 90/10 indirect/direct distribution, delivering efficient, comfortable illumination.

The product line is available in a range of light outputs and color temperatures, with comprehensive electrical and control options.



10% Down - 90% Up

PER 4FT - FOR 10% DOWN AND 90% UP DISTRIBUTION

LED OUTPUT	COLOR TEMPS	WATTS	NOMINAL LUMENS	EFFICACY LPW
Low output	4000K	29	3000	102
Medium output	4000K	34.5	3500	101
High output	4000K	40	4000	100



CANYON ONLINE

 Lumenwerx

ALWAYS LIGHT
RIGHT

lumenwerx.com
R.03.2026