

Lumenwerx 

Shalo Ultra

ULTRA-SLIM DESIGN, MAXIMUM IMPACT





Shalo Ultra One Collection, Endless Possibilities.



GRID SYSTEMS


DRYWALL

HARD SURFACES

WOOD SLAT
ACOUSTIC BAFFLE

Designed for integration into ceiling systems, including **Armstrong™** and **USG™**

PERIMETER

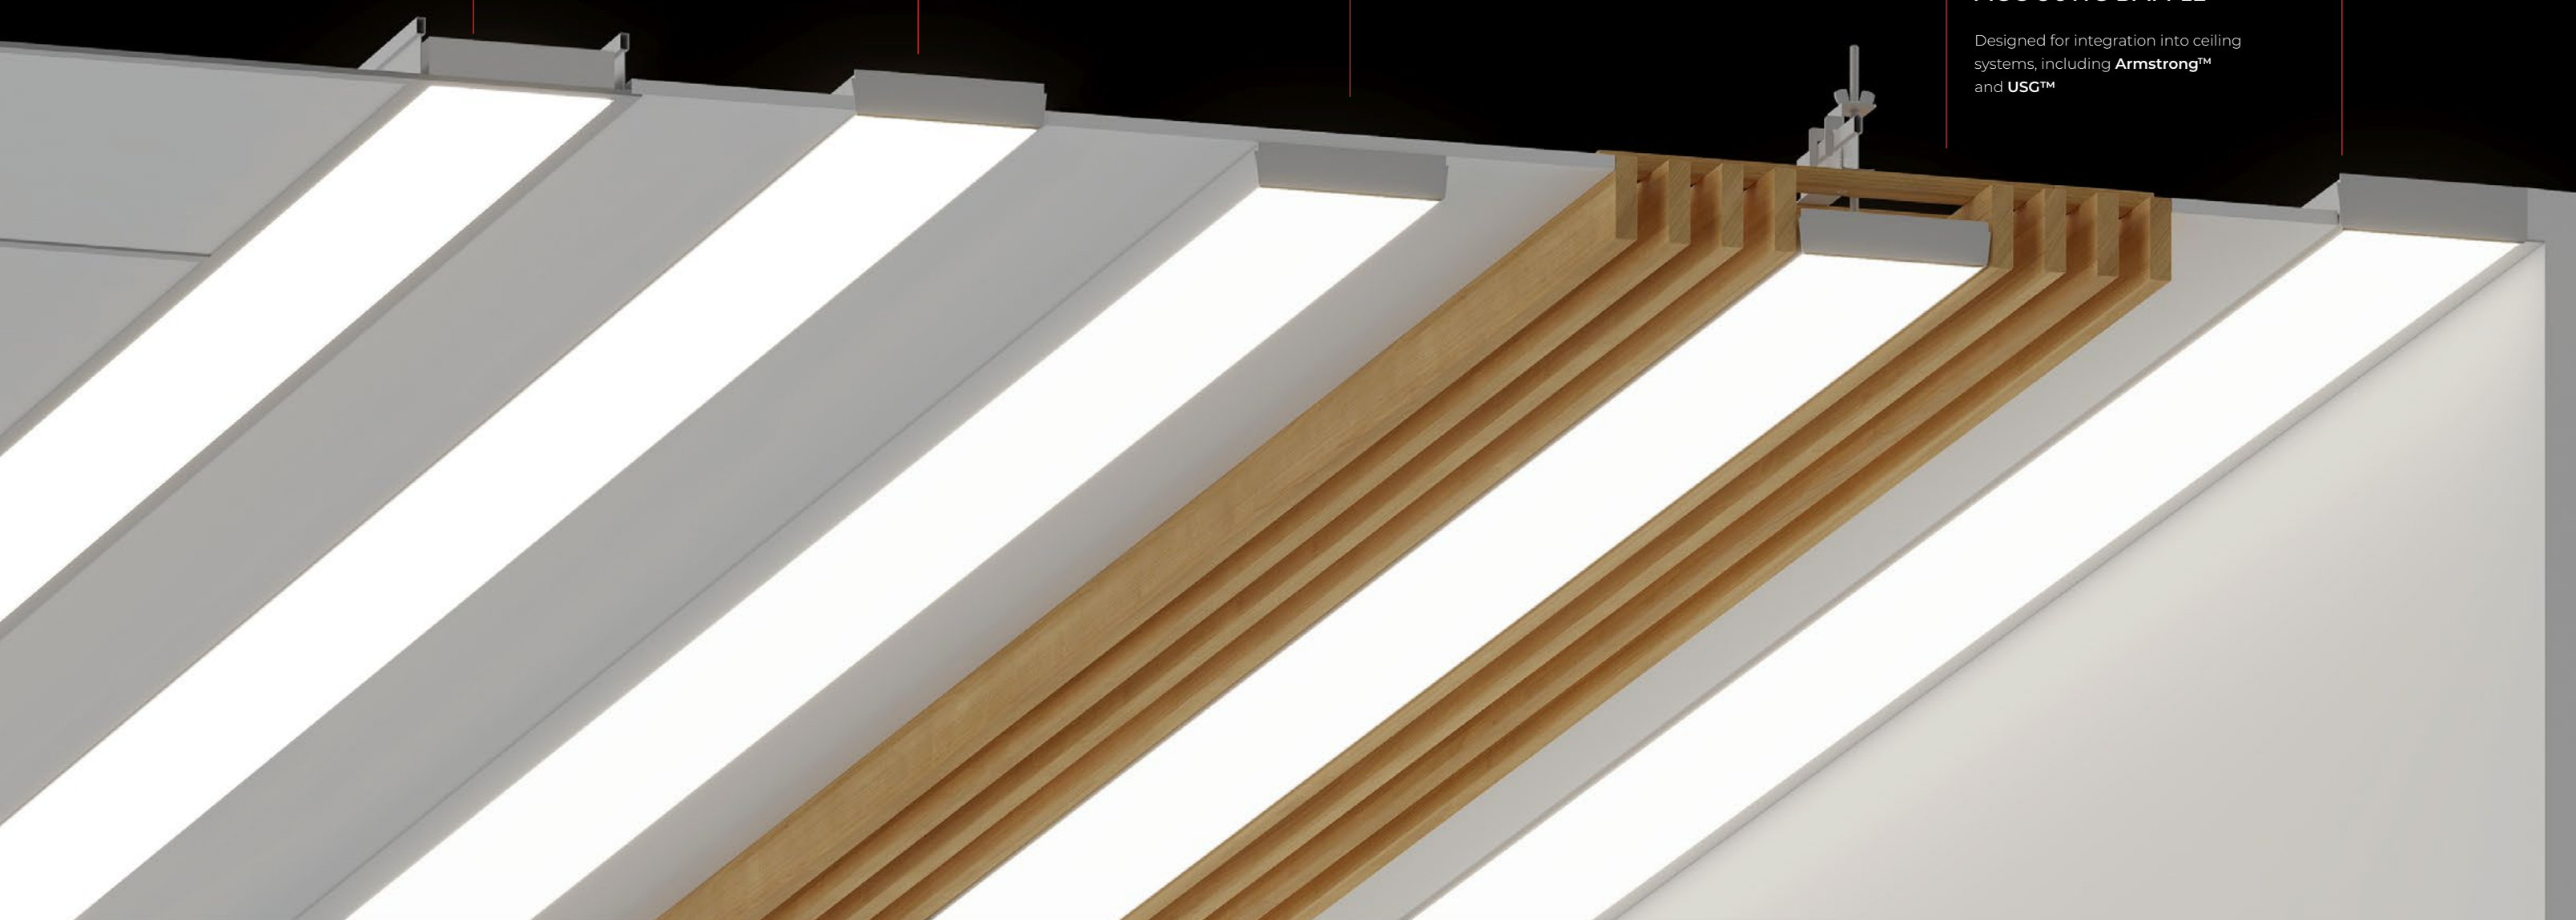



Shalo Ultra Collection

ULTRA-SLIM DESIGN, MAXIMUM IMPACT

Shalo Ultra redefines low-profile lighting with an ultra-slim design, outstanding performance, and versatile mounting options. It easily adapts to various ceiling types—including suspended and specialty ceilings—as well as spaces with minimal plenum clearance, ensuring a clean, uninterrupted line of light.

LUMINAIRE WIDTHS

1.5", 2", 3", 5"

UP TO

1200 lm/ft

LUMINAIRE HEIGHTS¹

0.5" (Shalo Ultra 1.5")

1" (Shalo Ultra 2", 3", 5")

OPTICS

SLO (Shallow Lambertian Optic)

SMPO (Shallow Micro-Prismatic Optic)

MOUNTINGS²


Recessed
Surface
Perimeter

CEILING TYPES

Wood Slat
Grid Systems
Acoustic Baffle
Drywall
Hard Surfaces

¹Remote driver option


²Shalo Ultra 1.5" is surface mount only

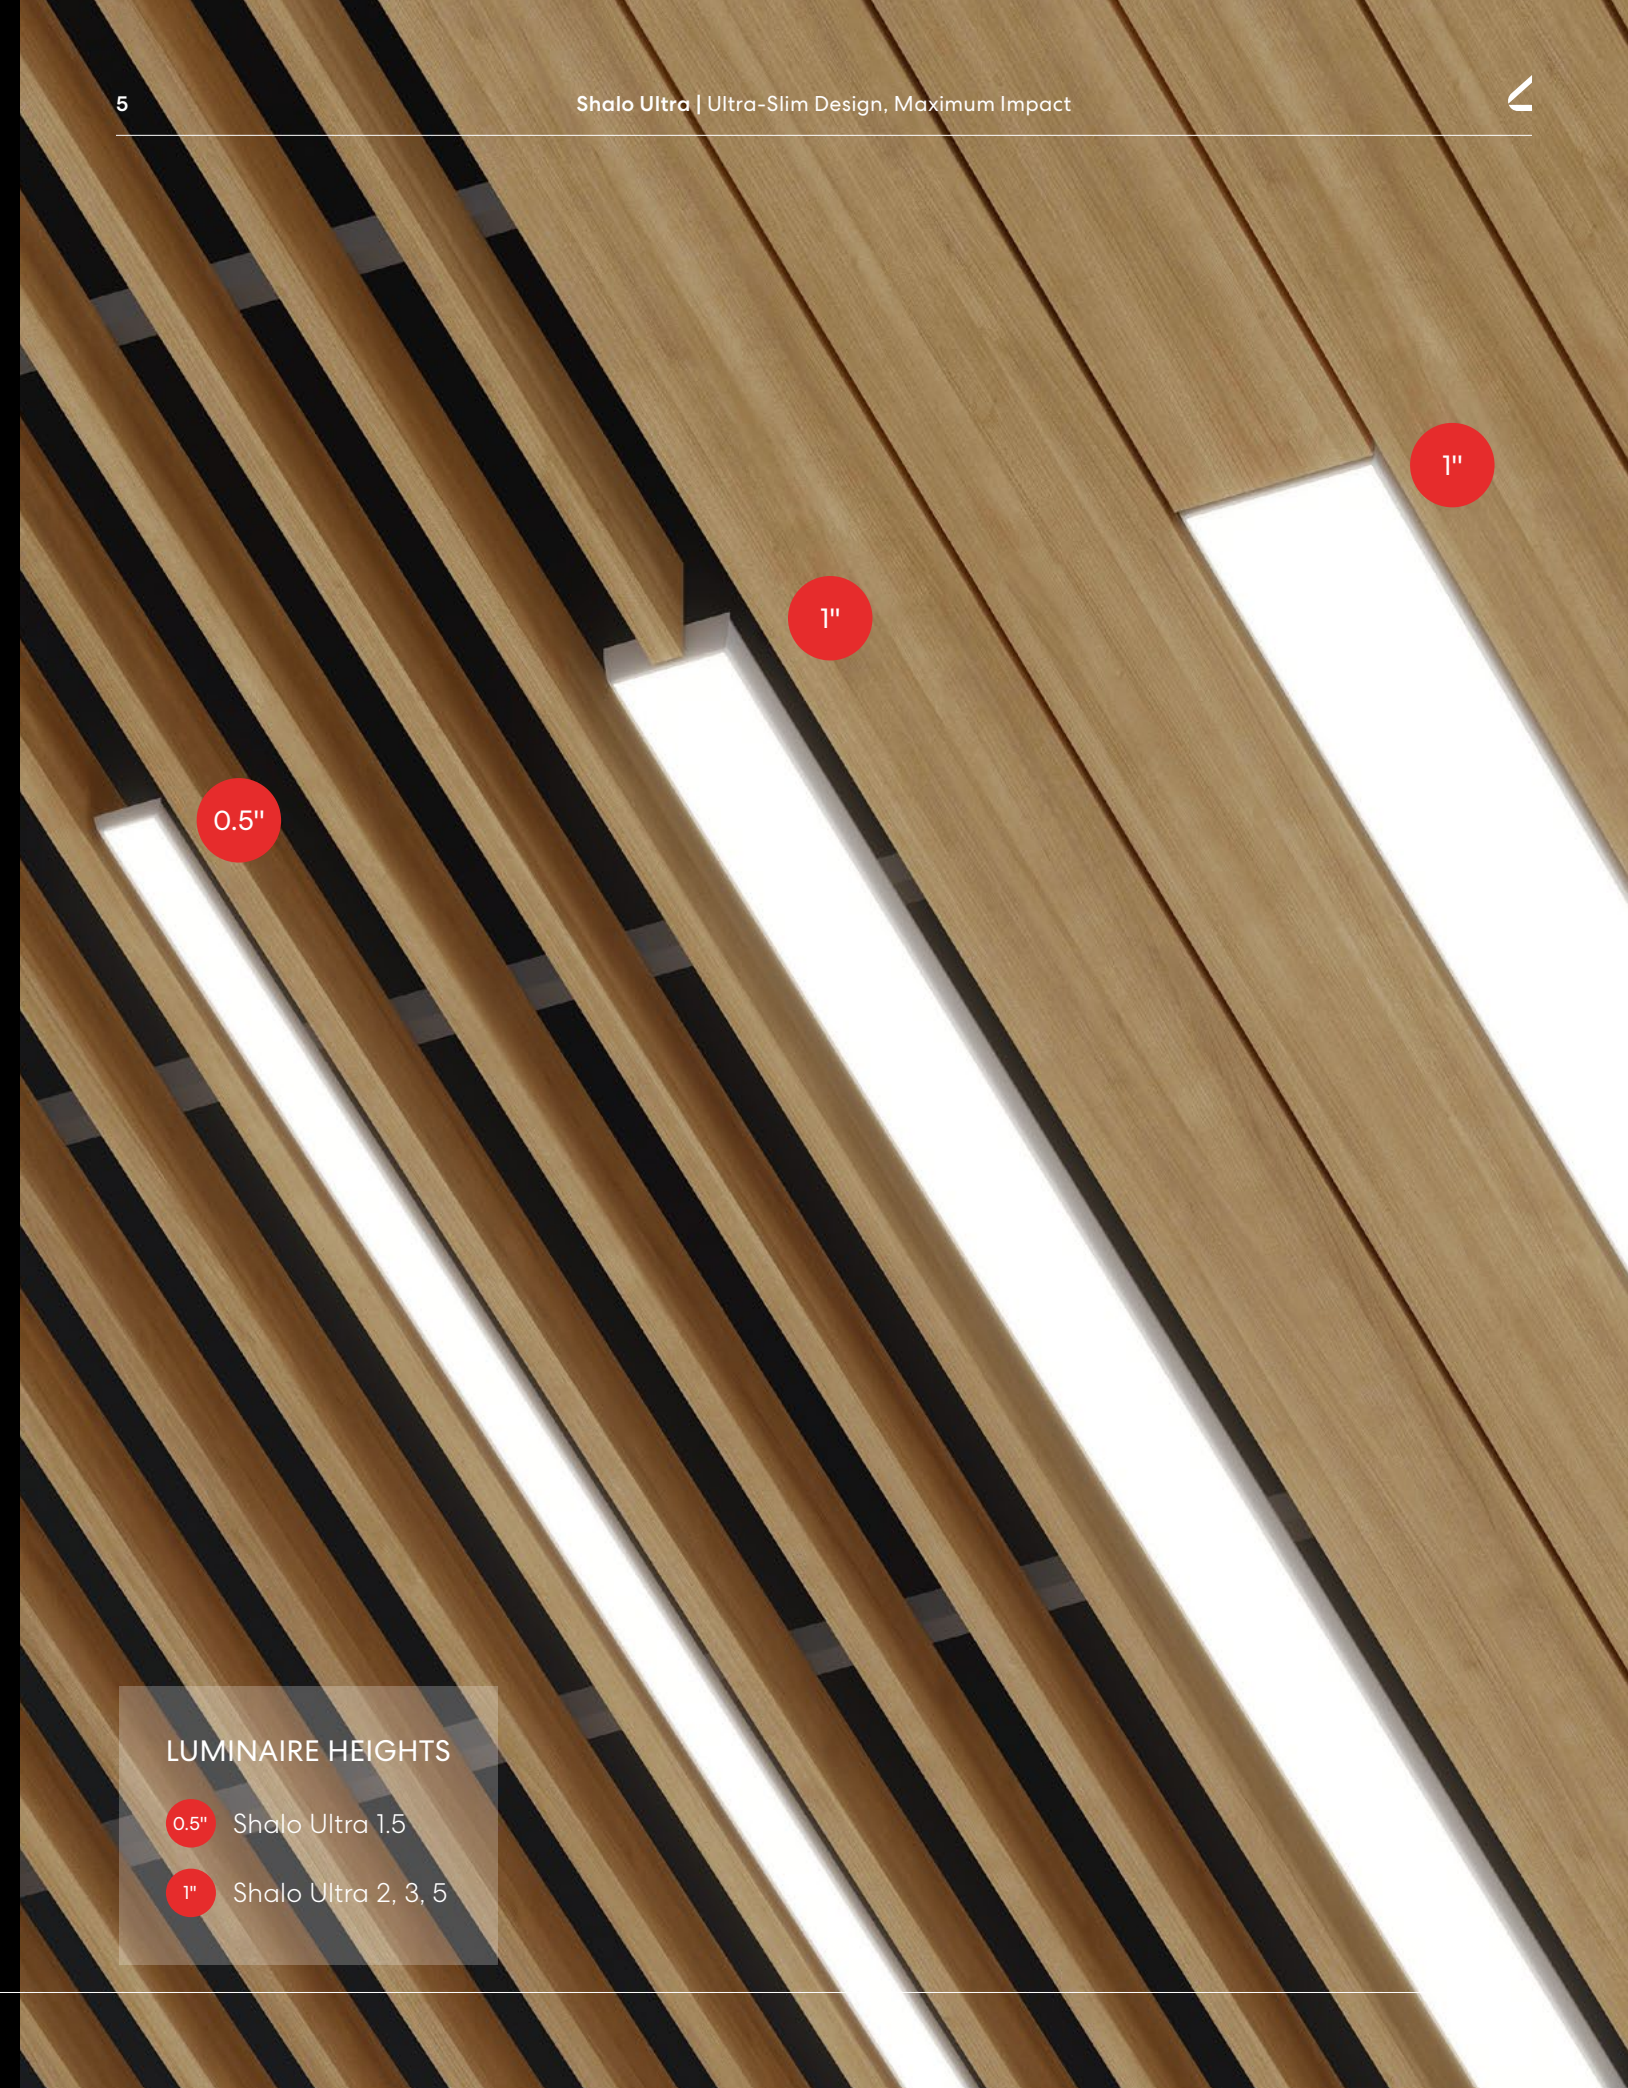


LUMINAIRE HEIGHTS

0.5" Shalo Ultra 1.5

1" Shalo Ultra 2, 3, 5

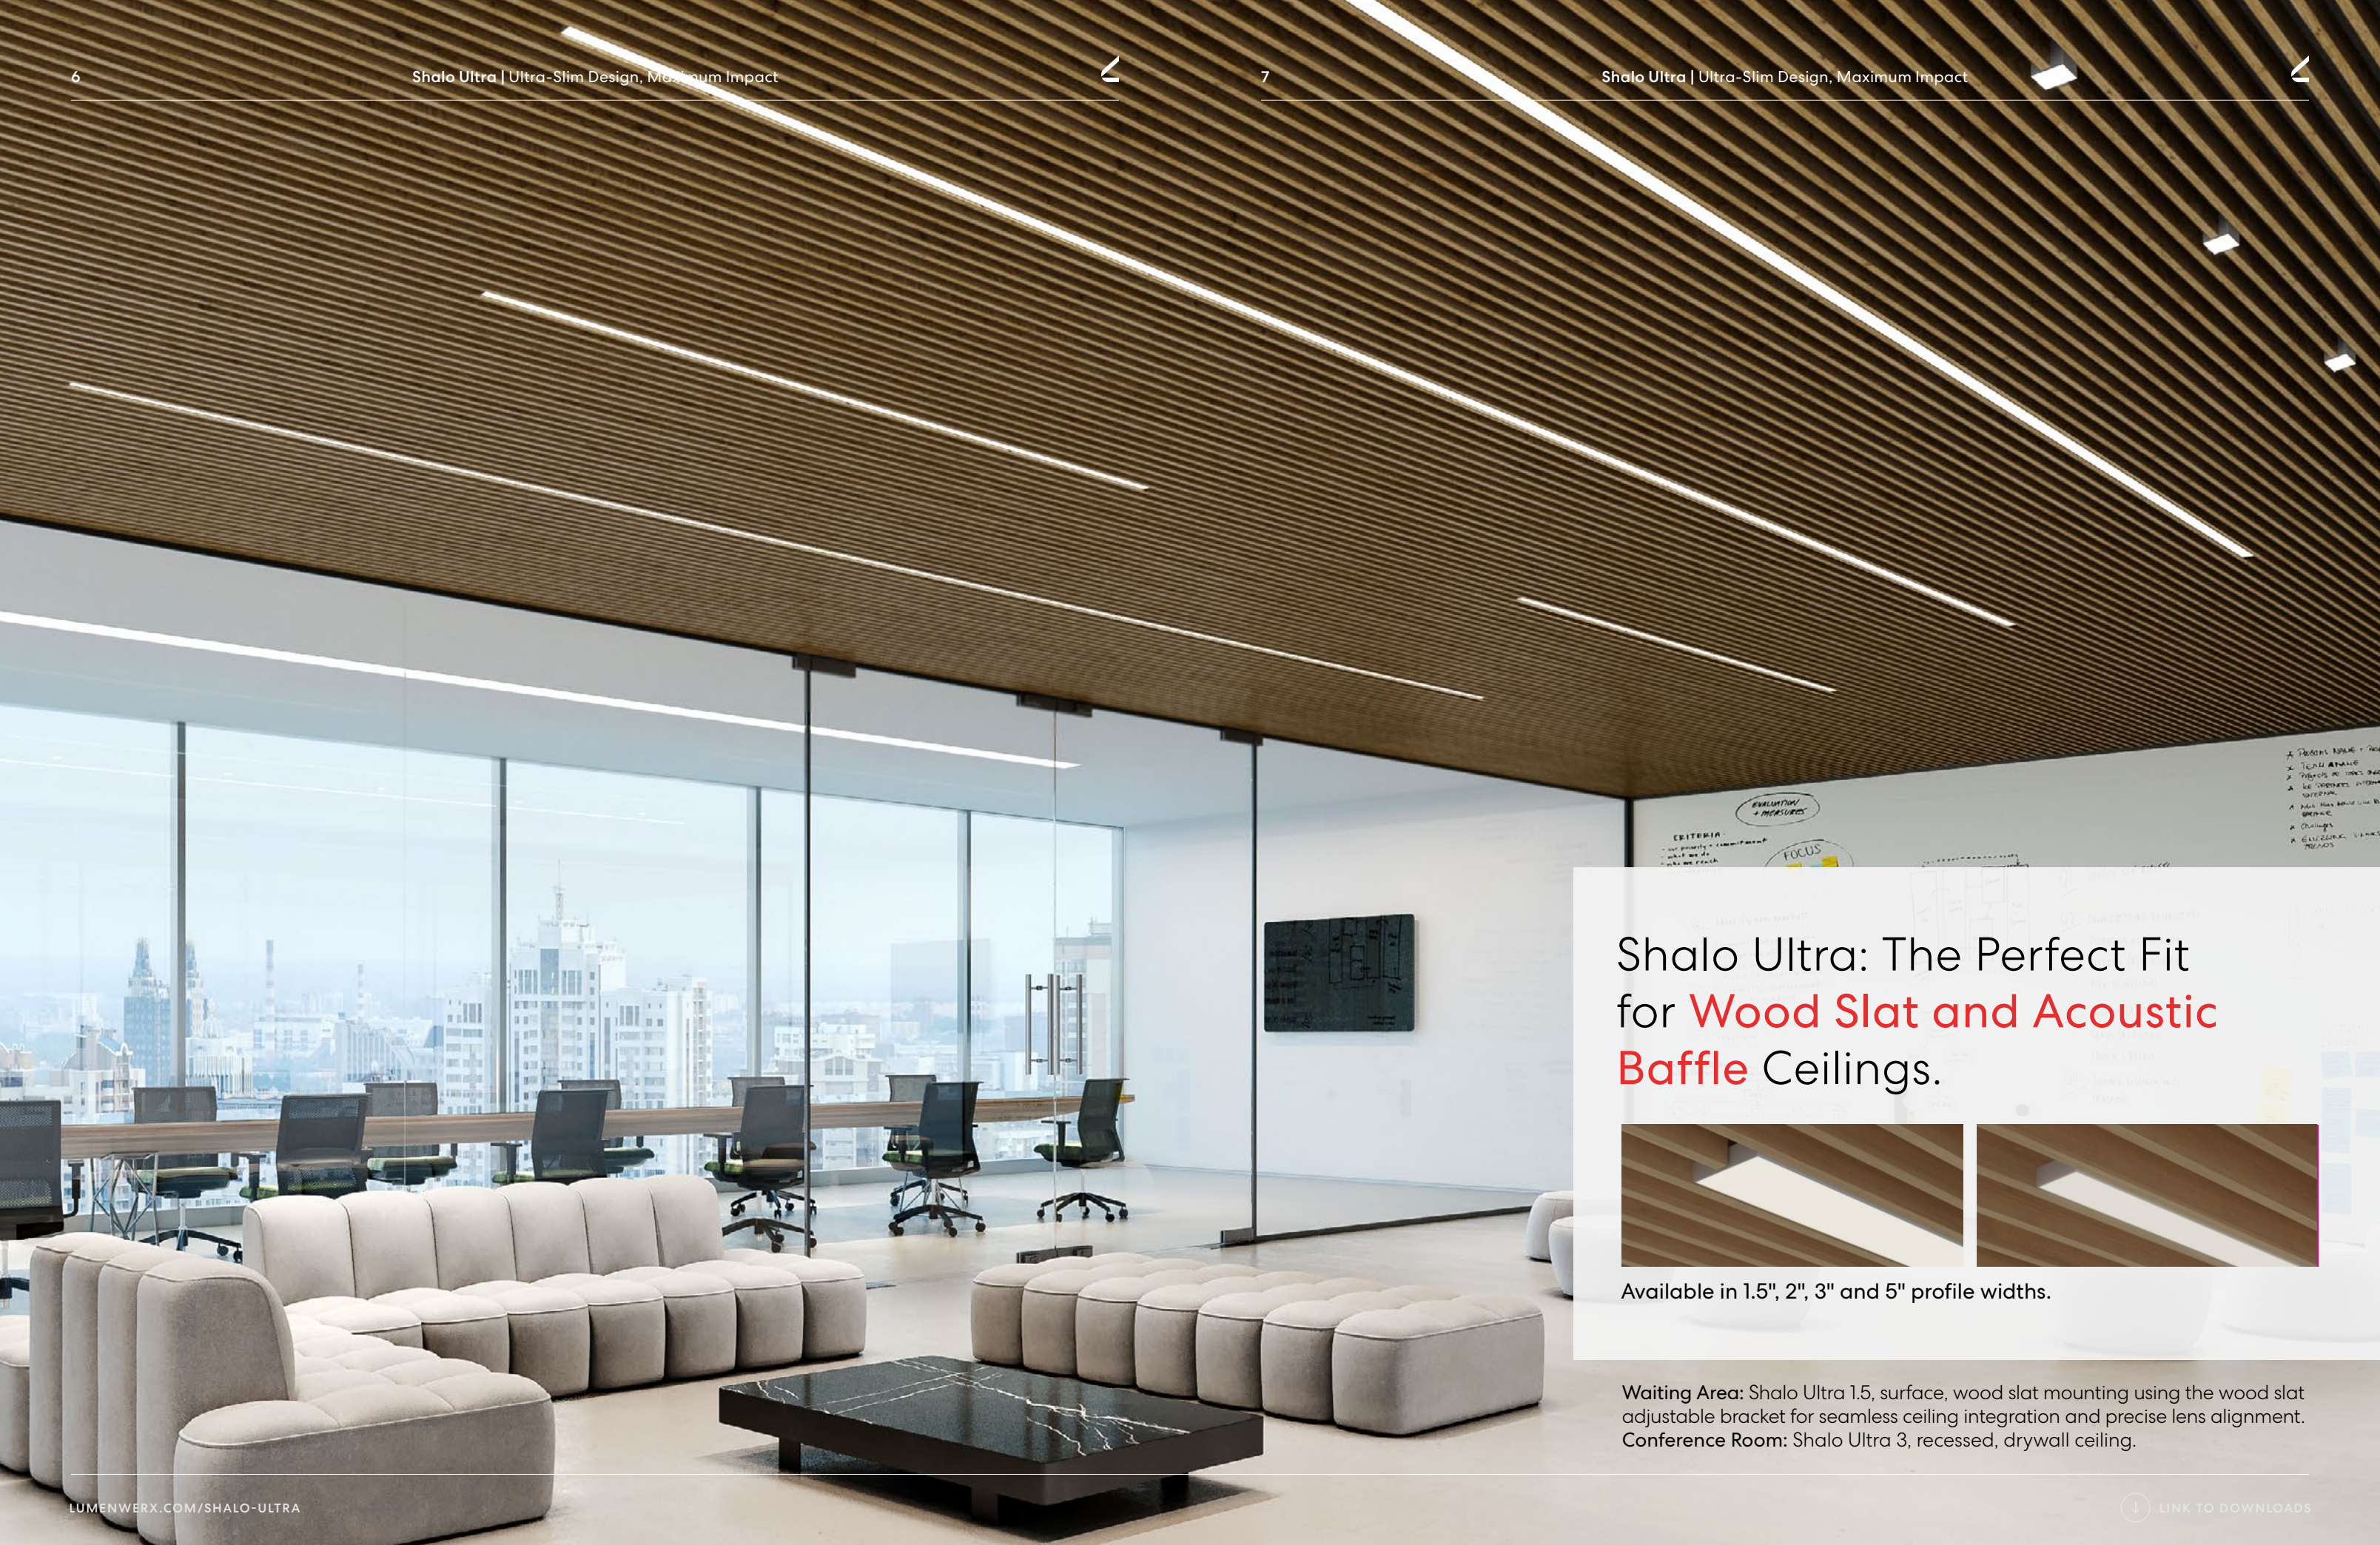

Shalo Ultra: The Perfect Fit for **Wood Slat and Acoustic Baffle** Ceilings.

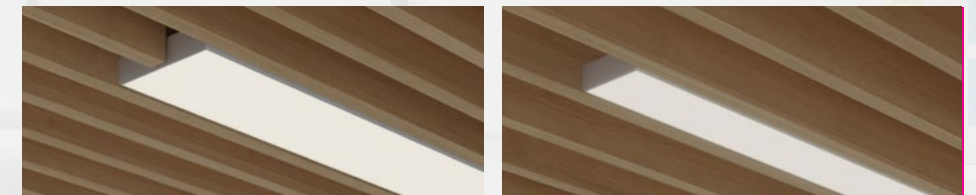

Available in 1.5", 2", 3" and 5" profile widths.

Waiting Area: Shalo Ultra 1.5, surface, wood slat mounting using the wood slat adjustable bracket for seamless ceiling integration and precise lens alignment.
Conference Room: Shalo Ultra 3, recessed, drywall ceiling.



Shalo Ultra 1.5

Shalo Ultra 1.5 delivers high-quality illumination in an ultra-slim 0.5" profile, offering up to 750 lm/ft. Designed for surface mounting, it's compatible with all wood ceiling types and features a magnet mounting option. Available as standalone in 1" increments from 2' to 8' and continuous runs over 8', this fixture offers a versatile solution that brings balance to any space.

LUMINAIRE HEIGHT

0.5"

MOUNTINGS

Surface

UP TO

750 lm/ft


OPTIC

Shallow Lambertian Optic (SLO)

Flexible and
Easy Installation

CONFIGURATIONS

Standalone: Up to 8'
Continuous Run: Over 8'

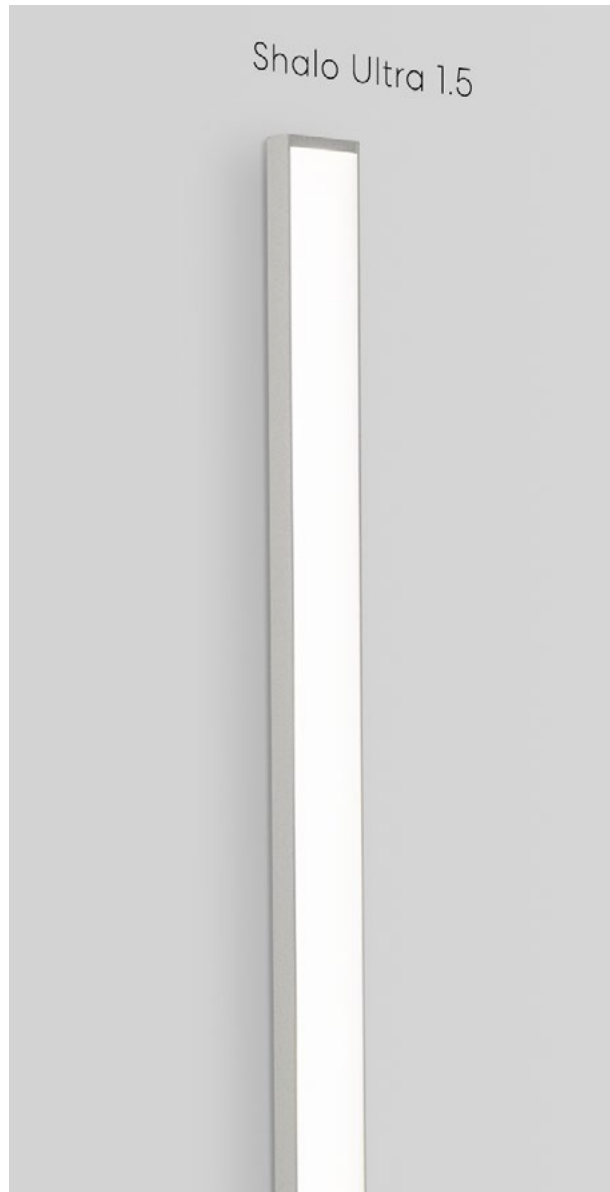

Versatile Ceiling Integrations


WOOD SLAT




ACOUSTIC BAFFLE




GRID SYSTEMS

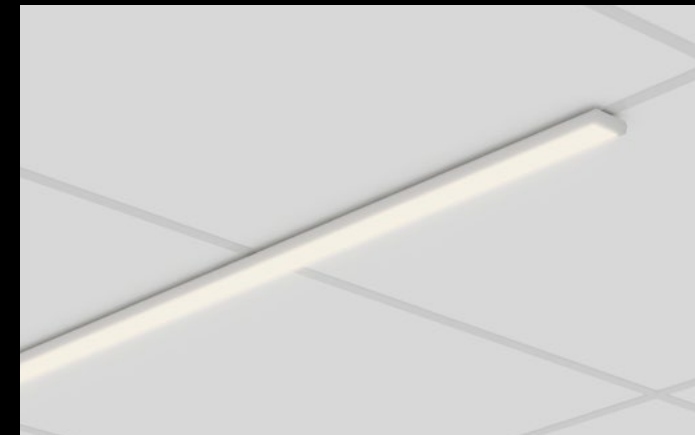

MAGNET MOUNTING OPTION

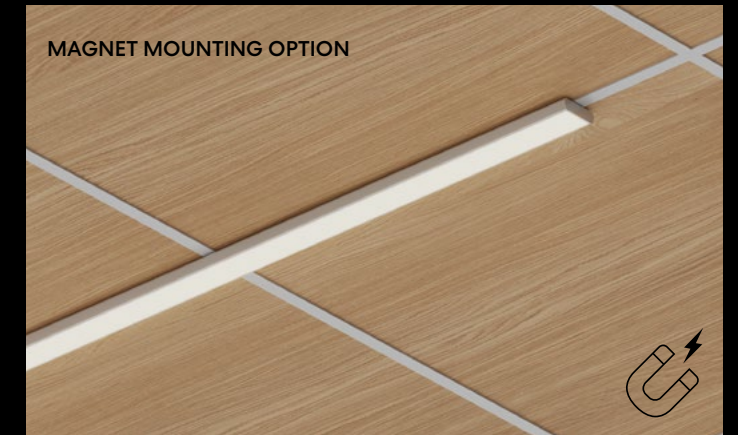

DRYWALL AND HARD SURFACES

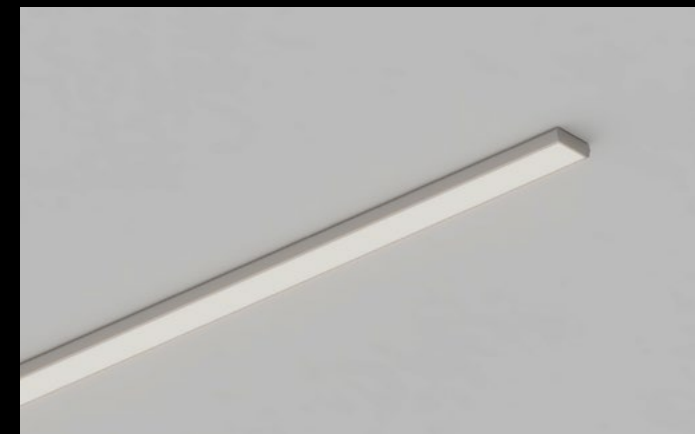

MAGNET MOUNTING OPTION





Shalo Ultra 3 and 5
Recessed **Transitions**
Effortlessly from
One Ceiling Type
to **Another** with our
unique multiple
flange option.



Shalo Ultra

2, 3, 5

Shalo Ultra 2", 3" and 5" deliver high-quality illumination in ultra-slim profiles offering up to 1200 lm/ft, with two optics: the Shallow Lambertian Optic and the low-glare Shallow Micro-Prismatic Optic. With remote and integral driver options, they are designed for surface, recessed, and perimeter mounting. Available as standalones, continuous runs, and patterns, featuring 90° leveled or inner corners.

PROFILE HEIGHT*

1"

MOUNTINGS

Surface, Recessed
Perimeter

OPTICS

Shallow Lambertian Optic (SLO)
Shallow Micro-Prismatic Optic (SMPO)


UP TO

1200 lm/ft

Remote or Integral Driver

CONFIGURATIONS

Standalone: Up to 8'
Continuous Run: over 8'
Patterns (90° leveled or inner corners)

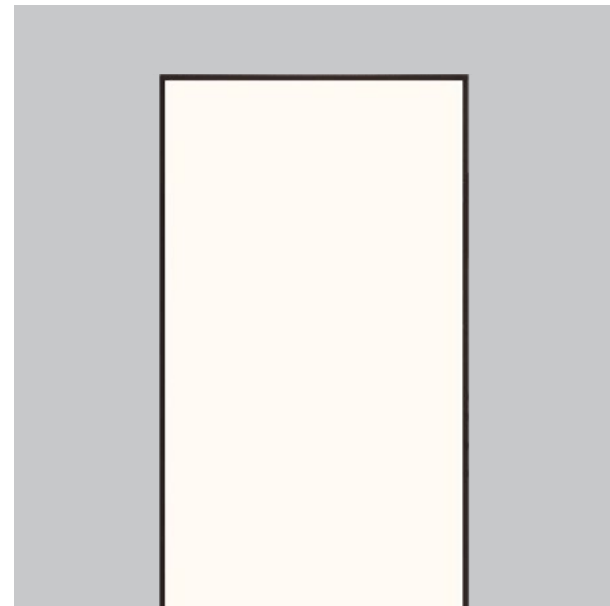

Shallow Lambertian Optic (SLO)



Shallow Micro-Prismatic Optic (SMPO)

*Shalo Ultra 2", 3" and 5" profile height varies by driver and mounting.

Versatile Ceiling Integrations

WOOD SLAT



WOOD LINEAR




ACOUSTIC BAFFLE



GRID SYSTEMS (RECESSED AND SURFACE MOUNT)




**DRYWALL (RECESSED AND SURFACE MOUNT)
AND HARD SURFACES (SURFACE MOUNT)**

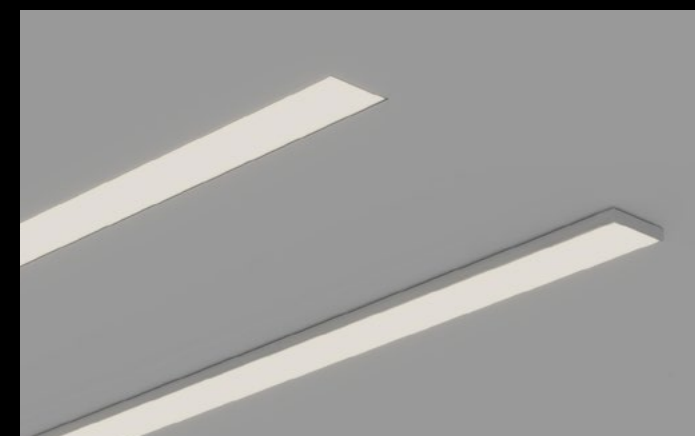

PERIMETER (Available in 3", 5" widths)




Shalo Ultra Patterns



Shalo Ultra 2, 3, and 5 are available in pattern configurations, featuring 90° leveled or inner corners for surface and recessed mounting. Leveled corners are also available for perimeter mounting.

CORNER OPTIONS



Inner Corner Recessed



Inner Corner Surface



Leveled Corner Recessed



Leveled Corner Surface



Leveled Corner Perimeter



No Plenum, No Problem.

Shalo Ultra installs effortlessly on any ceiling—even concrete—thanks to Universal Mounting Clips, delivering clean lines of light and creative freedom.




Shalo Ultra 5

Shalo Ultra 3

Shalo Ultra 2

Shalo Ultra 1.5

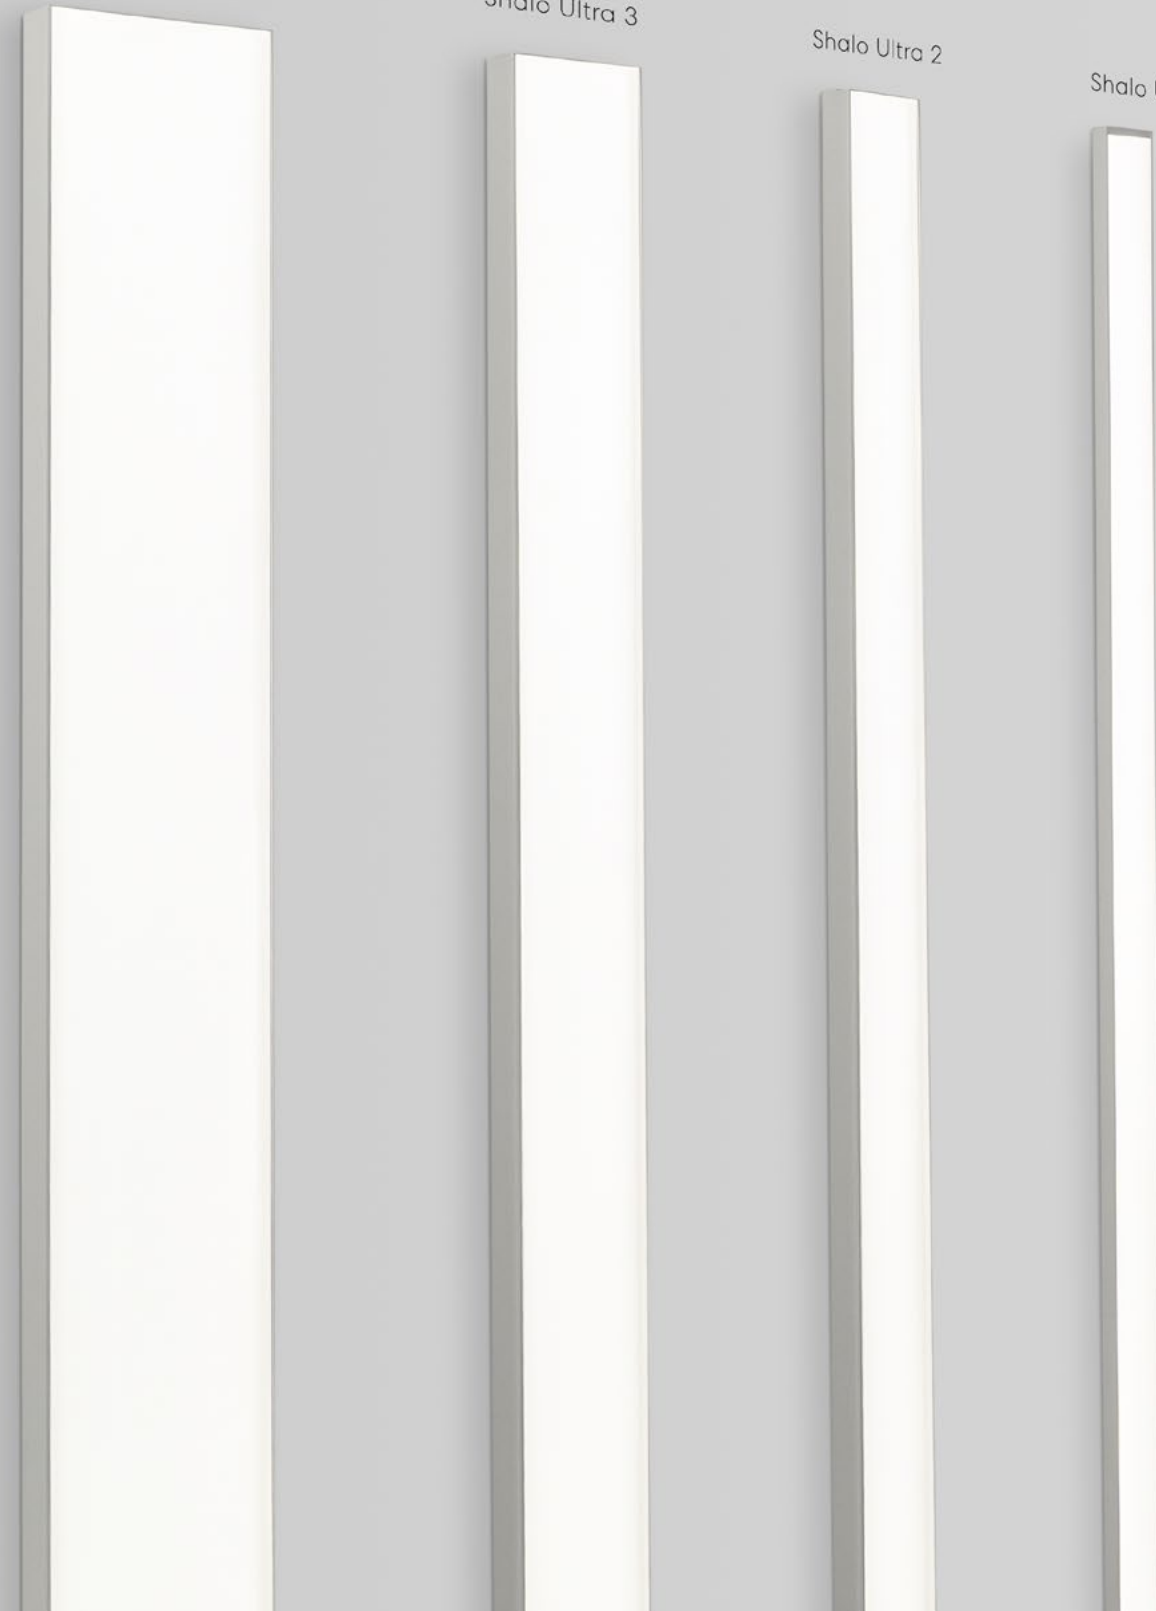

Overview

Shalo Ultra 1.5, 2, 3, 5

Features	Shalo Ultra 1.5		Shalo Ultra 2, 3, 5	
	Surface	Surface (Ceiling & Wall)	Recessed (Ceiling & Wall)	Perimeter
Mounting	Surface			
Dimensions Width x Height (Nominal)	1.5" (W)	2" (W) 3" (W) 5" (W)		3" (W) 5" (W)
	0.5" (H)	Remote: 1" (H) Integral: 2" (H)		Level: Flush Shallow: 1" Deep: 3.25"
Max lumen output	750 lm/W	1200 lm/W		1000 lm/W
Optics	SLO (Shallow Lambertian Optic) SMPO (Shallow Micro-Prismatic Optic)			
Driver	Remote		Remote	Integral
			Integral	
CRI	80+, 90+		80+, 90+	
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K		2700K, 3000K, 3500K, 4000K, 5000K,	
	Tunable White, Dim to warm (consult factory)		Tunable White, Dim to warm (consult factory)	
Configurations	Standalone		Standalone	Level
	Continuous Runs		Continuous Runs	
			Patterns	Deep
Certifications	ETL, Declare Label		ETL, Declare Label	
Installation Types	Shalo Ultra 1.5		Shalo Ultra 2, 3, 5	
	Wood Slat, Wood Linear & Acoustic Baffle Ceilings		Grid Ceiling Systems	
Wood Slat, Wood Linear & Acoustic Baffle Ceilings	Compatible with Wood & Acoustic Baffle Ceiling Systems		Compatible with Wood & Acoustic Baffle Ceiling Systems	
	Mounts between slats		Suitable for replacing a wide range of wood slat sizes	
	Adjustable bracket to position luminaire lens with slat, flush or regressed		Adjustable bracket to position luminaire lens with slat, flush or regressed	
	Suitable for slats of 1" to 6" in height		Suitable for slats of 1" to 6" in height	
Grid Ceiling Systems	Surface: Mounted on the Grid using Twist Clip or Magnet		Surface: Mounted on the Grid with caddy clip Recessed: Between T-Bars	
	T-Bar or Tegular Grid System (9/16" and 15/16")		T-Bar or Tegular Grid System (9/16" and 15/16")	
	Precision-Fit, Quick-Installation Design		Precision-Fit, Quick-Installation Design	
Drywall Ceiling	Universal mounting clip: Fast and simple installation		Universal mounting clip: Fast and simple installation	Trim, Trimless, Drywall Mud Flange Options
Hard Surfaces Ceiling (Wood, Metal, Concrete)	Universal mounting clip for multiple ceiling types		Universal mounting clip for multiple ceiling types	
Magnet Option (Magnets on the fixture only)	Grid ceiling systems: the fixture is surface mounted on the T-Bar Other ceiling types: Surface mount			
	Designed with integrated magnet attachment (Installation requires metal surface.)			



SHALO ULTRA
BROCHURE



SHALO ULTRA
ONLINE



ALWAYS LIGHT
RIGHT

lumenwerx.com
R.02.2026