

Smile

CURVED PROFILE.
LINEAR COMFORT.





Smile

Smile is a linear LED pendant luminaire with a gently curved profile that adds a distinctive expression to a design just 1 3/8" deep and 8 5/8" wide.

Smile provides widespread uplight and well-controlled downlight, delivering both efficient and comfortable illumination.

Constructed of an extruded aluminum housing, die-cast aluminum end caps, and precision connector elements, Smile installs with consistent alignment. Long-term reliability is supported by effective thermal management and easy access to drivers and cartridge-mounted arrays.


Smile is offered in a choice of light distributions, outputs, and color temperatures, together with comprehensive electrical and control options. Companion wall luminaires are also part of the collection.

PERFORMANCE


PER 4FT - FOR 15% DOWN AND 85% UP DISTRIBUTION

LED OUTPUT	COLOR TEMPS	WATTS	NOMINAL LUMENS	EFFICACY LPW
Low output	4000K	27.5	3000	110
Medium output	4000K	32	3500	109
High output	4000K	37	4000	108


SIZE

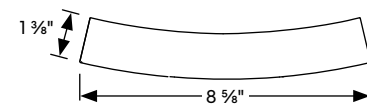


DISTRIBUTIONS





15% down - 85% up



35% down - 65% up



60% down - 40% up

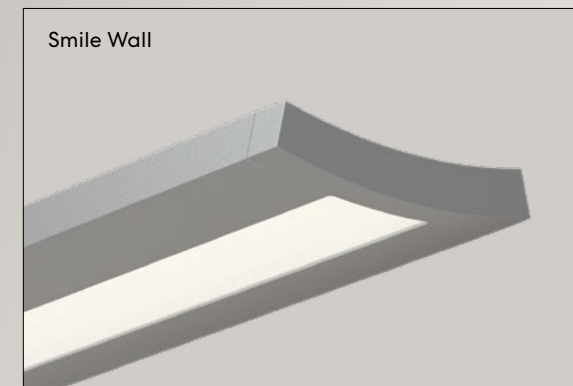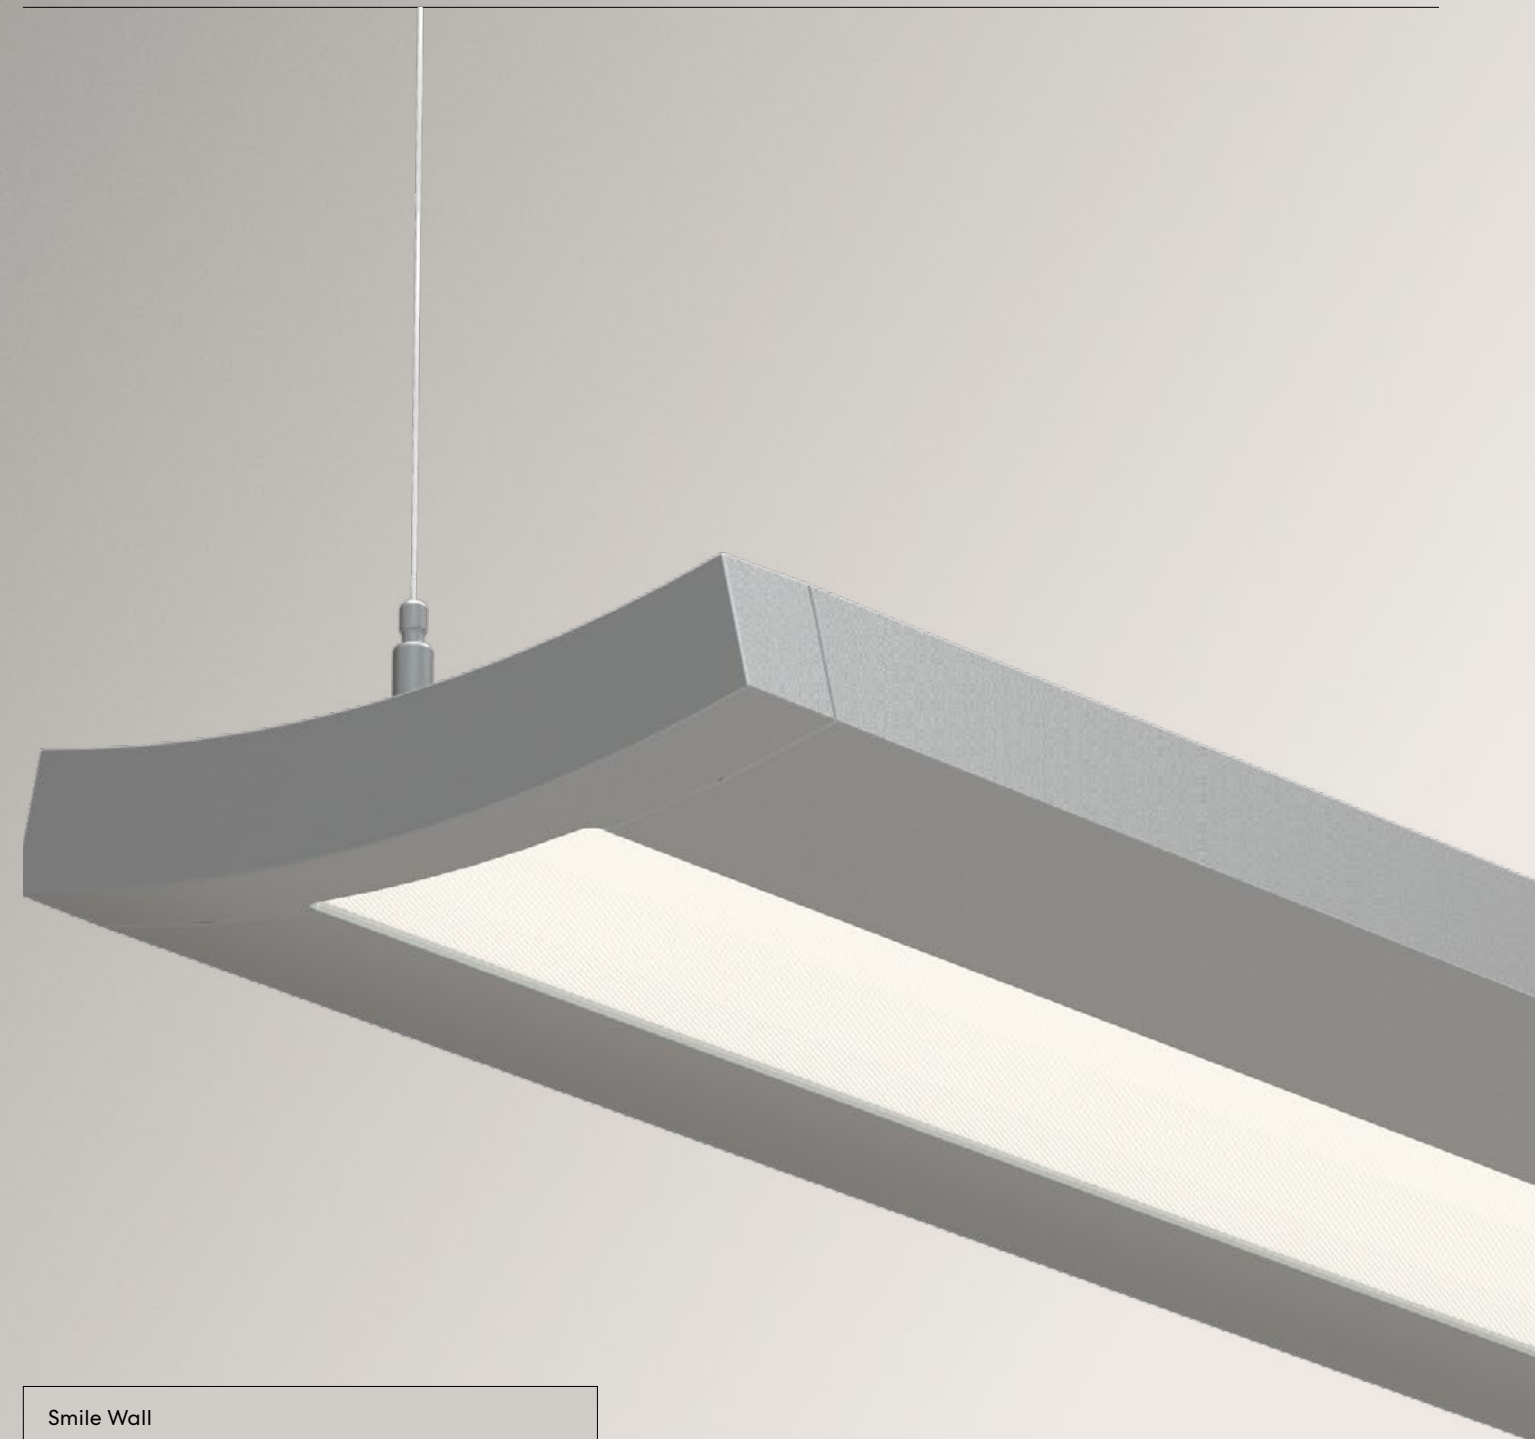





SMILE ONLINE

 Lumenwerx

ALWAYS LIGHT
RIGHT

lumenwerx.com

R.03.2026