


MEDIUS LED

WALL DIRECT

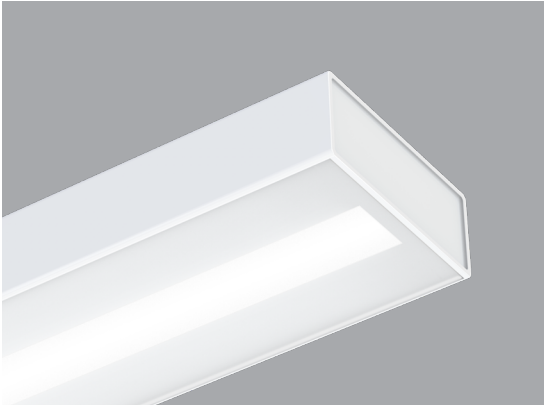

Shown with HLO optics

DESCRIPTION

Within its compact 115/16" x 4 3/4" profile, Medius supports optics for high performance direct lighting. The result is efficacy up to 119 LPW. Medius configures as individual luminaires or continuous runs and features the full range of electrical and control options.

PROJECT: _____

TYPE: _____

NOTES: _____



SENSORS
For latest information on sensors, click [here](#).



up to 119 lm/w performance

ORDER GUIDE

MEDWD	HLO	SW		
LUMINAIRE ID	OPTIC	LIGHT SOURCE	CRI	LUMEN PACKAGES
MEDWD - Medius wall direct	HLO - High-Efficiency Lambertian Optic	SW - Static white	80 - 80CRI 90 - 90CRI	350 - min. eco low output 350lm/ft 500 - low output 500lm/ft 750 - medium output 750lm/ft 1000 - max. high output 1000lm/ft #### - other required lm/ft


COLOR TEMP.	LUMINAIRE LENGTH	VOLTAGE	DRIVER	ELECTRICAL
27 - 2700k 30 - 3000k 35 - 3500k 40 - 4000k	Standard sections - 4', 8' & 12' For all other specify length #FT - nominal length in feet only Continuous Run - for luminaires over 12' Minimum Individual section 4'	120 - 120V 277 - 277V UNV - 120V-277V 347 ¹ - 347V ¹ Available with D1 driver only.	D1 - 1% 0-10V DA ² - DALI LDE1 ² - Lutron Hi-Lume 1% Eco ² On-site commissioning is required.	1 - 1 circuit +#EB - emergency battery (min 8' fixture, except Lutron) +#EM - emergency light circuit +#NL - night light circuit

DMB			
MOUNTING	FINISH	CONTROLS ³	OPTIONS
DMB - drywall mounting bracket	W - matte white AL - aluminum CF# - custom finish specify RAL#	STANDALONE CONTROLS^{4,5} Specify the quantity (#) of sensors per fixture. #ODS - Onboard Daylight CONNECTED CONTROLS⁶ NA - None	FU120 - Fuse120V FU277 - Fuse 277V TB# - T-bar caddy clip specify grid size TG# - Tegular caddy clip specify grid size ST - Screw Slots caddy clip CU - custom

³ Standalone and connected control options cannot be combined.
⁴ Available with D1 driver and 1 circuit options only.
⁵ Minimum 4' per zone. Provide control zone length.
⁶ Consult factory for connected controls. Compatible systems include Lutron, Encelium, Cooper, Acuity, Casambi, and Legrand.

See page 2 for ordering code detailed information

CROSS SECTION

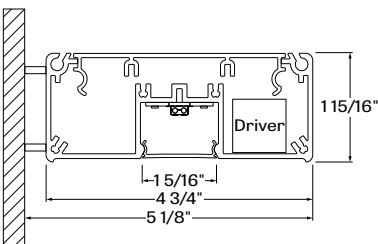

MEDWD - HLO

High Efficiency Lambertian Optic

File Name: MEDIUS-WALL-DIRECT-SPEC-REV2

Page: 1 / 4

February 6, 2026



OPTIC

HIGH EFFICIENCY LAMBERTIAN OPTIC (HLO) The High-Efficiency Lambertian Optic (HLO) shielding of diffusing 0.075" thick acrylic with up to 88% transmission and good source obscuration is combined with matte white side reflectors to create an efficient optical chamber with uniform luminosity. Luminaire brightness is controlled by the flux-to-shielding area ratio. For visual comfort, avoid high lumen output unless Medius is installed in a high ceiling application. Spacing criteria: 1.2 (longitudinal) x 1.1 (lateral).

LIGHT SOURCE - LED

Custom linear array of mid-flux LED's are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

PERFORMANCE PER 4' AT 4000K (WIO - Indirect 2000 Lumens Output)


HLO

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
eco low output	4000K	12	1400	119
low output	4000K	17.5	2000	115
medium output	4000K	27	3000	112
high output	4000K	36.5	4000	110

LUMINAIRE LENGTH

Medius is made up of standard 4, 8 and 12 foot sections that may be joined together to create longer continuous run lengths. Nominal run length must be noted in the product code. The minimum individual section available is 4 foot.

All individual sections are joined together onsite using the joiner kits provided. LumenWerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.



joining system for Medius
Direct

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

Access: Driver is accessible for field service by removing the upright LED and light guide cartridge.

EMERGENCY

Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation, up to 1000 lumens per 4ft (25°C) emergency lighting output. Recharge time of 24 hours.

MOUNTING OPTIONS

Fixtures may be horizontally mounted to the wall using a bracket. For long runs, a minimum of 6" from adjacent walls is required.

FINISH

- Interior** - 95%, reflective matte powder coated white paint
 - Exterior** - matte white, matte black or aluminum powder coating
 - Side reflector** - high reflective white coating
- Custom finishes are also available.

CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

One type is available:

ODS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used. Consult factory for integrating connected controls in a wall fixture.

CONSTRUCTION

Housing - Extruded aluminum 0.085" nominal, matte white or aluminum powder coating

Custom finishes are also available.

End cap - Die cast Aluminum (0.95" nominal)

Joiners - Die cast Aluminum (0.95" nominal)

Interior brackets - Die formed cold rolled sheet steel 20 gauge thick

Reflectors - High reflective white coated bent aluminum

Light guide - Clear PMMA Laminated with microstructure film formed into optical TIR/extraction form

WEIGHT

Medius 4 ft - 8.16 lbs, 3.7kg

Medius 8 ft - 15.09 lbs, 6.9kg

Medius 12 ft - 22.02 lbs, 10kg

CERTIFICATION


ETL - Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

LumenWerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. LumenWerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

PERFORMANCE WITH HIGH-EFFICIENCY LAMBERTIAN OPTIC (HLO)


350 LUMEN AT 80CRI - ECO LOW OUTPUT

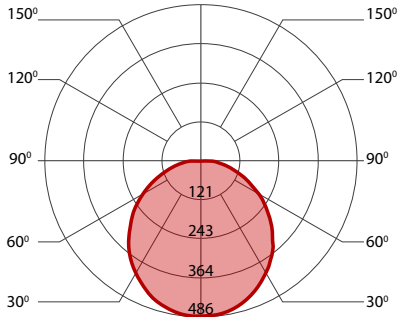

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
eco low output	3000K	12.5	1400	113
eco low output	3500K	12	1400	115
eco low output	4000K	12	1400	119


500 LUMEN AT 80CRI - LOW OUTPUT

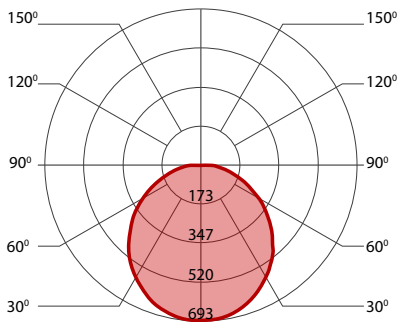

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	3000K	18	2000	110
low output	3500K	18	2000	111
low output	4000K	17.5	2000	115


750 LUMEN AT 80CRI - MEDIUM OUTPUT

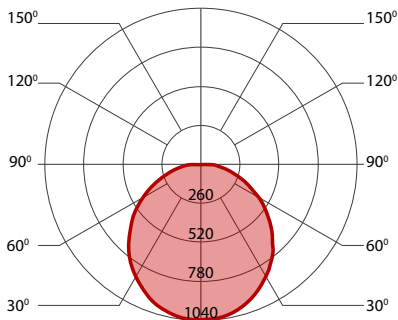

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
medium output	3000K	28	3000	107
medium output	3500K	27.5	3000	109
medium output	4000K	27	3000	112

1000 LUMEN AT 80CRI - HIGH OUTPUT

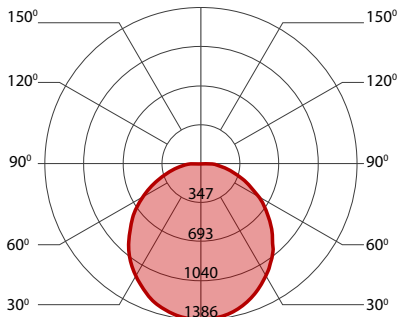

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
high output	3000K	38	4000	105
high output	3500K	37.5	4000	106
high output	4000K	36.5	4000	110