

# MINI PIVOT LINEAR

## Surface - Grid ceiling



**!** This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.

Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.


**!** Wire dimming conductors as Class 1.

**💡** For electrical connections, please refer to the [wiring diagram guide](#).



### SINGLE FIXTURE

**!** For remote driver box, please refer to the [remote driver installation sheet](#) for more information.





#### 1 PREPARE CEILING OPENING.

Remove ceiling tiles **[A]** where the fixture will be installed as well as the adjacent tiles for easy access during installation.

Bring the main power cable **[B]** (by others).

**CAUTION:** Make sure the electrical power is turned off.

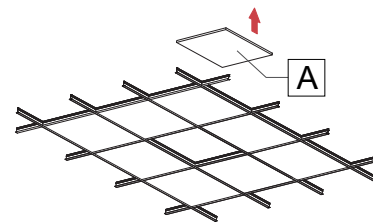


#### 2 MAKE ELECTRICAL CONNECTIONS.

Unfasten the screw and pivot the J-box cover **[C]**. Pass the main power cable **[B]** (by others) through the cable connector (by others), and install onto the J-box **[C]**.

Make electrical connections between the main power cable **[B]** and fixture cable **[D]** using wire nuts (by others). Close the J-box cover **[C]**. Insert the J-box **[C]** into the ceiling opening **[E]**.


**NOTE:** Connect the green wire to your ground wire.

**WARNING:** A luminaire with more than one power supply connection means shall be connected to only one branch circuit.

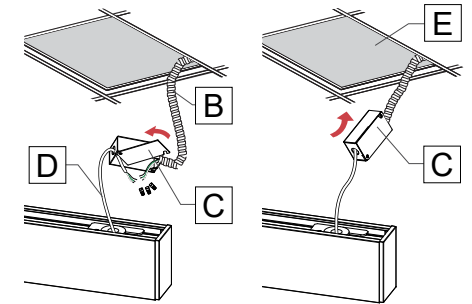


#### 3 CLOSE CEILING OPENING.

Close ceiling tiles **[A]**.

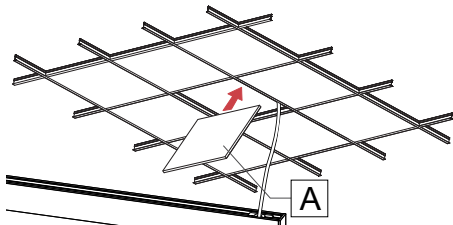


#### 4 FIX FIXTURE TO BRACKET.

Install the brackets **[F]** to T-bar.



Insert fixture **[G]** into the brackets **[F]**.

**NOTE:** Gently pull down on the fixture to test if the brackets are in the grooves.

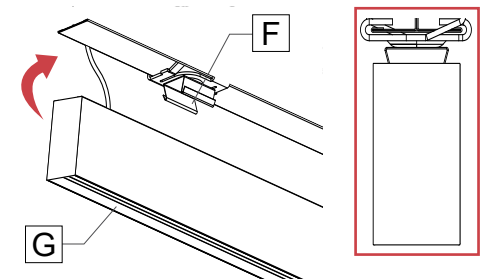

# MINI PIVOT LINEAR

Surface - Grid ceiling

## CONTINUOUS RUN


**1** FOR CONTINUOUS RUN, REPEAT STEPS **1** TO **4** FROM THE SINGLE UNIT SECTION FOR THE FIRST TRACK IN THE RUN, THEN: .....

**2** FIX 2<sup>ND</sup> FIXTURE TO BRACKET. ....

Install the brackets [F] to T-bar.

Insert 2<sup>nd</sup> fixture [H] into the brackets [F].


**NOTE:** Gently pull down on the fixture to test if the brackets are in the grooves.

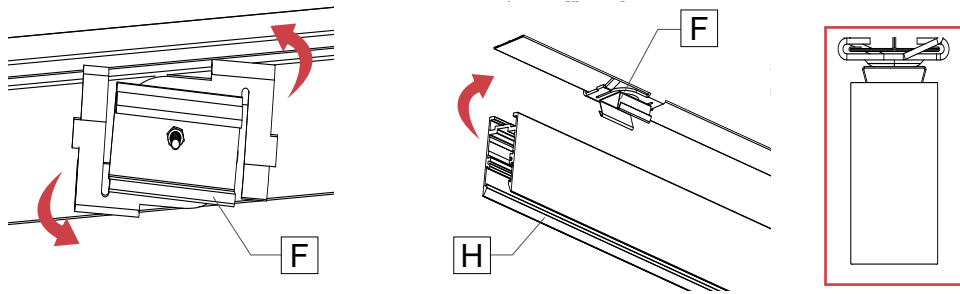

**3** MAKE ELECTRICAL CONNECTIONS BETWEEN FIXTURES. ....

Make the wire connections between the two fixtures [G] and [H] using wire nuts [I]. Push wires inside the fixture.


**NOTE:** Number of wires may vary.

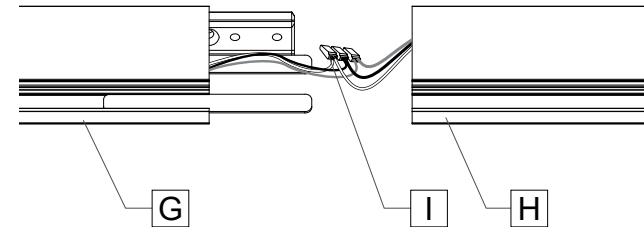

**4** JOIN THE FIXTURES. ....

Slide the 2<sup>nd</sup> fixture [H] to the 1<sup>st</sup> fixture [G] aligning the blades [J] and push the 2<sup>nd</sup> fixture [H] until it clicks in.

Secure the joiner using set screws [L].

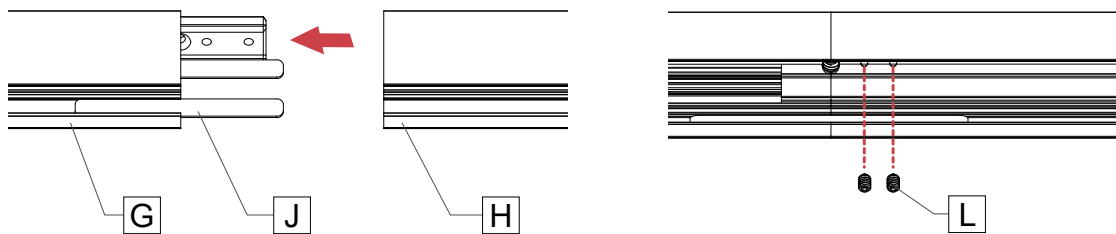

**5** REPEAT STEPS **2** TO **4** FOR THE REST OF THE TRACKS IN THE RUN.