

RIM MINI OVAL

PENDANT
STATIC WHITE



Project: _____
Type: _____



DESCRIPTION

Rim Mini is part of our Miniwerx Collection—a growing series of luminaires engineered to deliver full-scale performance in significantly reduced form factors. At just 1.25" tall and 0.8" wide, Rim Mini is over 40% slimmer than the standard Rim profile and maintains the design freedom the Rim Collection is known for. It enables clean, precise lighting with a minimal visual footprint and maximum flexibility across shapes, sizes, and configuration options.

Order Guide

LUMINAIRE ID	SIZE	OPTIC	LIGHT SOURCE ¹	CRI
RIMMIOP		ULO	SW	90CRI
RIMMIOP - Rim Mini Oval Pendant	24INX48IN - 24" diameter x 48" length 24INX72IN - 24" diameter x 72" length 24INX96IN - 24" diameter x 96" length 36INX72IN - 36" diameter x 72" length 36INX96IN - 36" diameter x 96" length	ULO - Uniform Lambertian Optic	SW - Static white ¹ Chromawerx SOLA, DUO, and QUADRO also available. Consult factory.	90CRI - 90+ CRI

LUMEN PACKAGE		COLOR TEMPERATURE	VOLTAGE	REMOTE DRIVER	ELECTRICAL ⁴	
					1C	
24" x 48" 24" x 72" 24" x 96" 36" x 72" 36" x 96"	Low 3300LM 4600LM 5900LM 5000LM 6300LM	High 4900LM 6200LM 8800LM 7400LM 9300LM	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	120V - 120V 277V - 277V UNV - 120V-277V 347V ² -347V	D1 - 1% 0-10V DA ³ - DALI LDE1 ³ - Lutron Hi-Lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED0.1% SOLOdrive 0-10V	1C - 1 circuit ⁴ For other circuit configurations, consult factory.
				² Available with D1 driver only.	³ On-site commissioning is required.	


MOUNTING					FINISH
					MC
DRIVER BOX ⁵ RCD ⁶ - Round canopy driver box RDB - Remote driver box ⁵ For more information see page 3. ⁶ Not available with 347V.	CANOPY FINISH W - Matte white AL - Aluminum B - Matte black CF - Custom finish, specify RAL#	POWER POC - Integrated suspension power-over-aircraft cable BAC - Black power cord + aircraft cable WAC - White power cord + aircraft cable	MOUNTING POINTS MC ^{7,8} - Multiple canopies ⁷ 4 canopies provided ⁸ With the RCD option, the type of each canopy may differ based on the selected lumen package and driver options. Consult factory for details.	MOUNTING CABLE LENGTH 18IN - 18" 24IN - 24" 36IN - 36" 48IN - 48" 60IN - 60" 72IN - 72" 96IN - 96" 120IN - 120" ##IN - Specify nominal length in inches	W - Matte white AL - Aluminum B - Matte black CF - Custom finish, specify RAL#

RIM MINI OVAL




PENDANT
STATIC WHITE

Dimensions

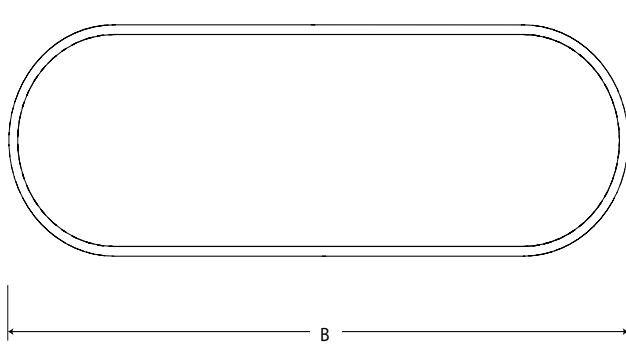


Size	A diameter	B length
24" x 48"	24 5/8"	48 5/8"
24" x 72"	24 5/8"	72 5/8"
24" x 96"	24 5/8"	96 5/8"
36" x 72"	36 5/8"	72 5/8"
36" x 96"	36 5/8"	96 5/8"

SECTION VIEW



Photometrics

Delivered lumens at 4000K at 90+ CRI



24" x 48"

LM	WATTS	LM/W
3300	36.7	90
4900	56.3	87

24" x 72"

LM	WATTS	LM/W
4600	51.1	90
6200	71.3	87

24" x 96"

LM	WATTS	LM/W
5900	65.6	90
8800	101.1	87

36" x 72"

LM	WATTS	LM/W
5000	55.6	90
7400	85.1	87

36" x 96"

LM	WATTS	LM/W
6300	70	90
9300	106.9	87

MULTIPLIER TABLE

Use this table to get results for different color temperatures and CRI for all photometric tables.

CCT	WATTS	LPW
2700K	1.08	0.92
3000K	1.05	0.96
3500K	1.02	0.98
4000K	1.00	1.00

RIM MINI OVAL




PENDANT
STATIC WHITE


Mounting Options

RCD - ROUND CANOPY DRIVER BOX

MC - MULTIPLE CANOPY




AC - Aircraft cable




POC - Power-over-aircraft cable

RDB - REMOTE DRIVER BOX

MC - MULTIPLE CANOPY



AC - Aircraft cable



POC - Power-over-aircraft cable

RIM MINI OVAL



PENDANT
STATIC WHITE

Technical Specifications

OPTIC

Uniform Lambertian Optic (ULO)

Thermoformed from impact-modified white PMMA, the ULO provides even luminosity, with up to 88% transmission. Combined with the LED array running around the inside of the housing, the open form and ULO create a widespread 50% direct and 50% indirect light distribution with spacing criteria of 1.6.

LIGHT SOURCE

Custom array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K and 4000K with 90+ CRI and elevated R9 value. Color consistency is maintained to 3 SDCM.

All LEDs have been tested in accordance with IESNA LM-80-08 and results have shown L80 lumen maintenance are greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

FINISH

Interior: 95% reflective, matte white powder coating

Exterior: Matte white, matte black or aluminum powder coating. Custom finishes are also available.

CONSTRUCTION

Housing: Rolled and seamlessly welded aluminum

Lens: Coextruded polycarbonate

WEIGHT

24" x 48": 5.1 lbs - 2.3 kg

24" x 72": 7.1 lbs - 3.2 kg

24" x 96": 9.1 lbs - 4.1 kg

36" x 72": 7.7 lbs - 3.5 kg

36" x 96": 9.7 lbs - 4.4 kg

CERTIFICATION

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.