

RIM MINI SQUARE

PENDANT
STATIC WHITE



Project: _____
Type: _____



DESCRIPTION

Rim Mini is part of our Miniwerx Collection—a growing series of luminaires engineered to deliver full-scale performance in significantly reduced form factors. At just 1.25" tall and 0.8" wide, Rim Mini is over 40% slimmer than the standard Rim profile and maintains the design freedom the Rim Collection is known for. It enables clean, precise lighting with a minimal visual footprint and maximum flexibility across shapes, sizes, and configuration options.

Order Guide

LUMINAIRE ID	SIZE	OPTIC	LIGHT SOURCE ¹	CRI
RIMMISP		ULO	SW	90CRI
RIMMISP - Rim Mini Square Pendant	12INX12IN - 12" x 12" 24INX24IN - 24" x 24" 36INX36IN - 36" x 36" 48INX48IN - 48" x 48" 60INX60IN - 60" x 60" 72INX72IN - 72" x 72"	ULO - Uniform Lambertian Optic	SW - Static white ¹ Chromawerx SOLA, DUO, and QUADRO also available. Consult factory.	90CRI - 90+ CRI

LUMEN PACKAGE		COLOR TEMPERATURE	VOLTAGE	REMOTE DRIVER	ELECTRICAL ⁴	
					1C	
12" x 12" 24" x 24" 36" x 36" 48" x 48" 60" x 60" 72" x 72"	Low 1300LM 2600LM 3900LM 5200LM 6500LM 7800LM	High 1900LM 3800LM 5800LM 7700LM 9500LM 11500LM	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	120V - 120V 277V - 277V UNV - 120V-277V 347V² - 347V ² Available with D1 driver only.	D1 - 1% 0-10V DA³ - DALI LDE1³ - Lutron Hi-Lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED0.1% SOLOdrive 0-10V ³ On-site commissioning is required.	1C - 1 circuit ⁴ For other circuit configurations, consult factory.


MOUNTING					FINISH										
DRIVER BOX⁵	CANOPY FINISH	POWER	MOUNTING POINTS	MOUNTING CABLE LENGTH¹²	W - Matte white AL - Aluminum B - Matte black CF - Custom finish, specify RAL#										
SCD^{6,7} - Square canopy driver box RDB⁸ - Remote driver box ⁵ For more information see page 3. ⁶ With single canopy option, not available for lumen packages over 6000 lm (3500 lm for Lutron driver options). ⁷ Not available with 347V. ⁸ Multiple remote driver boxes may be necessary for lumen packages higher than 10000 lm.	W - Matte white AL - Aluminum B - Matte black CF - Custom finish, specify RAL#	POC - Integrated suspension power-over-aircraft cable BAC - Black power cord + aircraft cable WAC - White power cord + aircraft cable	SC⁹ - Single canopy MC^{10,11} - Multiple canopies ⁹ Available up to 48" x 48" only. ¹⁰ 4 Canopies provided. ¹¹ With the SCD option, the type of each canopy may differ based on the selected lumen package and driver options. Consult factory for details.	18IN - 18" 24IN - 24" 36IN - 36" 48IN - 48" 60IN - 60" 72IN - 72" 96IN - 96" 120IN - 120" ##IN - Specify nominal length in inches ¹² For single canopy option the minimum required mounting height are (distance from ceiling to top of fixture in inches):											
				<table border="1"> <thead> <tr> <th>Fixture size</th> <th>Minimum height</th> </tr> </thead> <tbody> <tr> <td>12" x 12"</td> <td>7"</td> </tr> <tr> <td>24" x 24"</td> <td>15"</td> </tr> <tr> <td>36" x 36"</td> <td>22"</td> </tr> <tr> <td>48" x 48"</td> <td>29"</td> </tr> </tbody> </table>	Fixture size	Minimum height	12" x 12"	7"	24" x 24"	15"	36" x 36"	22"	48" x 48"	29"	
Fixture size	Minimum height														
12" x 12"	7"														
24" x 24"	15"														
36" x 36"	22"														
48" x 48"	29"														

RIM MINI SQUARE




PENDANT
STATIC WHITE

Dimensions

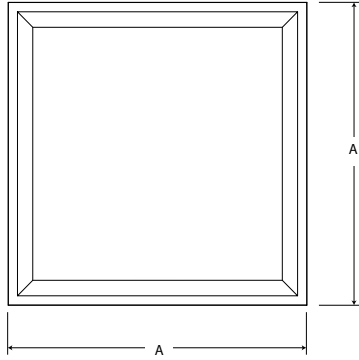


Size	A
12" x 12"	12 5/8"
24" x 24"	24 5/8"
36" x 36"	36 5/8"
48" x 48"	48 5/8"
60" x 60"	60 5/8"
72" x 72"	72 5/8"

SECTION VIEW



Photometrics

Delivered lumens at 4000K at 90+ CRI



12" x 12"

LM	WATTS	LM/W
1300	14.4	90
1900	21.8	87

24" x 24"

LM	WATTS	LM/W
2600	28.9	90
3800	43.7	87

36" x 36"

LM	WATTS	LM/W
3900	43.3	90
5800	66.7	87

48" x 48"

LM	WATTS	LM/W
5200	57.8	90
7700	88.5	87

60" x 60"

LM	WATTS	LM/W
6500	72.2	90
9500	109.2	87

72" x 72"

LM	WATTS	LM/W
7800	86.7	90
11500	132.2	87

MULTIPLIER TABLE

Use this table to get results for different color temperatures and CRI for all photometric tables.

CCT	WATTS	LPW
2700K	1.08	0.92
3000K	1.05	0.96
3500K	1.02	0.98
4000K	1.00	1.00

RIM MINI SQUARE




PENDANT
STATIC WHITE


Mounting Options

SCD - SQUARE CANOPY DRIVER BOX

SC - SINGLE CANOPY




AC - Aircraft cable




POC - Power-over-aircraft cable

MC - MULTIPLE CANOPY




AC - Aircraft cable




POC - Power-over-aircraft cable

RDB - REMOTE DRIVER BOX

SC - SINGLE CANOPY

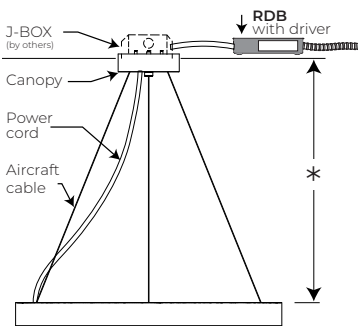


AC - Aircraft cable




POC - Power-over-aircraft cable

MC - MULTIPLE CANOPY



AC - Aircraft cable



POC - Power-over-aircraft cable

*minimum height

For single canopy option, the minimum required mounting heights:

Fixture size	* Minimum height
12" x 12"	7"
24" x 24"	15"
36" x 36"	22"
48" x 48"	29"

RIM MINI SQUARE



PENDANT
STATIC WHITE

Technical Specifications

OPTIC

Uniform Lambertian Optic (ULO)

Thermoformed from impact-modified white PMMA, the ULO provides even luminosity, with up to 88% transmission. Combined with the LED array running around the inside of the housing, the open form and ULO create a widespread 50% direct and 50% indirect light distribution with spacing criteria of 1.6.

LIGHT SOURCE

Custom array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K and 4000K with 90+ CRI and elevated R9 value. Color consistency is maintained to 3 SDCM.

All LEDs have been tested in accordance with IESNA LM-80-08 and results have shown L80 lumen maintenance are greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

FINISH

Interior: 95% reflective, matte white powder coating

Exterior: Matte white, matte black or aluminum powder coating. Custom finishes are also available.

CONSTRUCTION

Housing: Rolled and seamlessly welded aluminum

Lens: Coextruded polycarbonate

WEIGHT

12" x 12": 2 lbs - 0.9kg

24" x 24": 4 lbs - 1.8 kg

36" x 36": 6 lbs - 2.7 kg

48" x 48": 8 lbs - 3.6 kg

60" x 60": 10 lbs - 4.5 kg

72" x 72": 12 lbs - 5.4 kg

CERTIFICATION

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.