

# SQUERO COMBINATION

PENDANT PATTERN

STATIC WHITE, BIOS



Declare.




## DESCRIPTION

Squero Combination Pattern brings style and flexibility to linear lighting systems. Less than 2" wide, Squero offers a variety of optics, each providing a different visual texture, as well as photometric performance. Squero Combination allows various optics to be combined in a single luminaire. Optional modules are also available for accent lighting. It can be installed as individual luminaires, in continuous runs, or as patterns. See separate spec sheets for Squero and Squero Combination.



**SENSORS**  
For latest information on sensors, click [here](#).




Up to 145 lm/W performance

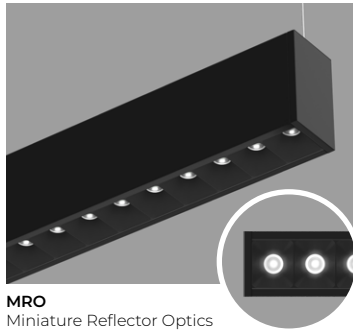


**MRO**  
Miniature Reflector Optics

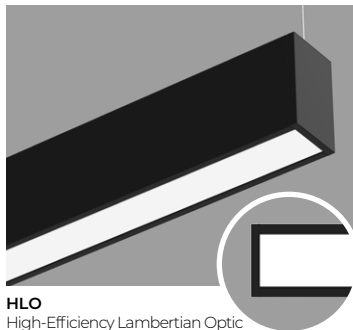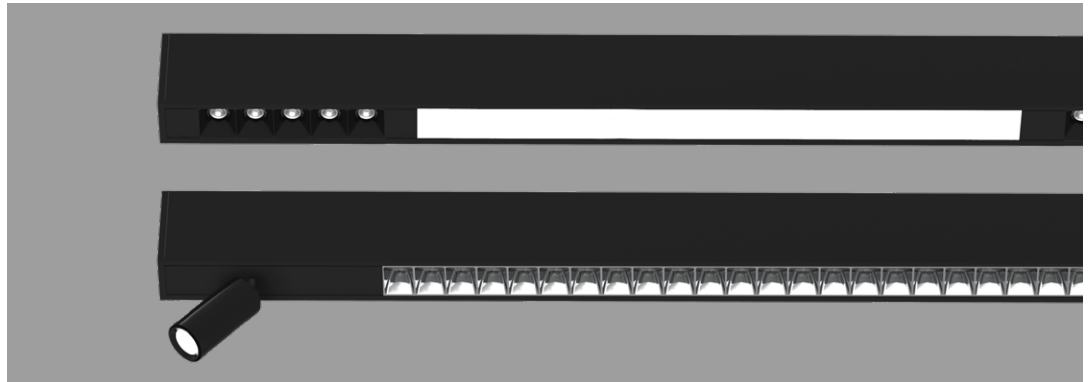


**HLO**  
High-Efficiency Lambertian Optic

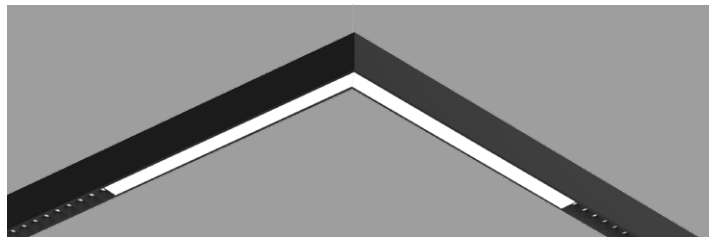


**LIT CORNER<sup>1</sup>**

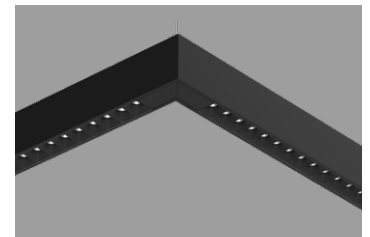


**UNLIT CORNER<sup>1</sup>**

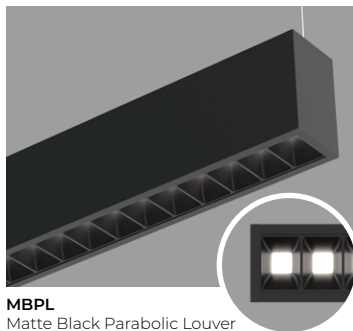


**MBPL**  
Matte Black Parabolic Louver

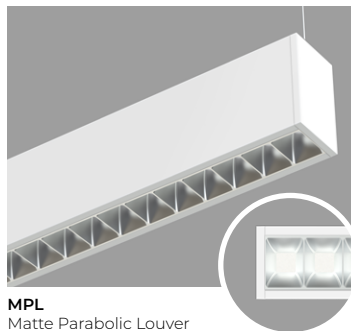


**MPL**  
Matte Parabolic Louver

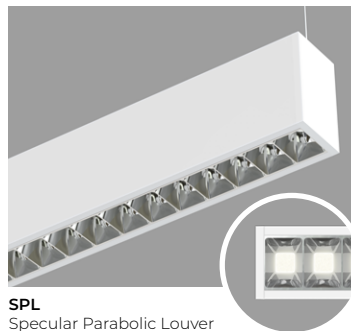

**SPL**  
Specular Parabolic Louver

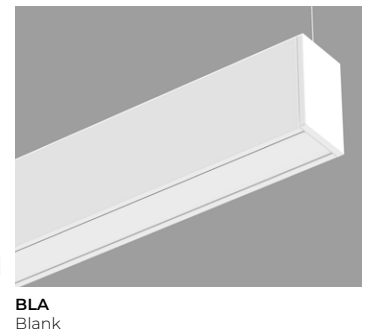


**BLA**  
Blank

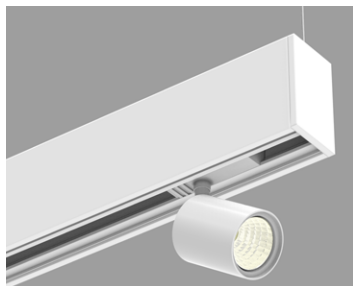

**ITRLMX, ITR**  
Integrated Track



**AAM**  
Adjustable Accent Module

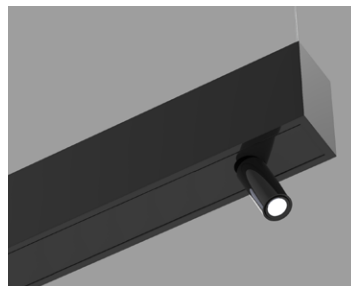

**MS**  
Micro Spot Module

<sup>1</sup>Lit corners are only available with HLO, min corner dimensions 2'x2'. Unlit corner min dimensions 6'x6'.

# SQUERO COMBINATION

PENDANT PATTERN

STATIC WHITE, BIOS



Project: \_\_\_\_\_

Type: \_\_\_\_\_

## Order Guide

Example: SQUCOMPPAT-D-6FT-MRO18-2FT-HLO-2FT6IN-BLA-1FT6IN-WH-NA-SW-80CRI-350LMF-NA-27K-LEV-BLA-90CRO(I)-120V-D1-1C-NA-ACS-W-NA-NA-1AAM21(80CRI-350LM-27K-W-NA)

A drawing of your combination pattern is required - anything from a line drawing to an architectural drawing.

LUMINAIRE ID	DISTRIBUTION	TOTAL PATTERN LENGTH <sup>1</sup>	DIRECT OPTICS <sup>3,4</sup> Specify the total length for each required optic, including the corner lengths.				MRO COLOR	INDIRECT OPTIC Specify NA for Direct fixture
<b>SQUCOMPPAT</b>								
<b>SQUCOMPPAT</b> - Squero Combination Pendant Pattern	<b>DI</b> - Direct/Indirect <b>D</b> - Direct	<b>#FT#IN</b> <sup>2</sup> - Specify the total nominal length (#) in 1' and/or 1" increments  Continuous runs: lengths over 12'  <sup>1</sup> Total luminaire length should equal the sum of all the direct optic lengths. <sup>2</sup> Minimum fixture length is 4'.	<b>MRO18</b> <sup>5</sup> - 18 degree Miniature Reflector Optic <b>MRO35</b> <sup>5</sup> - 35 degree Miniature Reflector Optic <b>MRO55</b> <sup>5</sup> - 55 degree Miniature Reflector Optic <b>MBPL</b> <sup>6</sup> - Matte Black Parabolic Louver <b>MPL</b> <sup>6</sup> - Matte Parabolic Louver <b>SPL</b> <sup>6</sup> - Specular Parabolic Louver <b>HLO</b> - High-Efficiency Lambertian Optic <b>BLA</b> <sup>7</sup> - Blank <b>ITRLMX</b> <sup>8</sup> - Integrated track by Lumenwerx <b>ITR</b> <sup>8,9</sup> - Integrated track by others	<b>FT</b> <b>FT</b> <b>FT</b> <b>FT</b> <b>FT</b> <b>FT</b> <b>FT</b> <b>FT</b> <b>FT</b> <b>FT</b>	<b>IN</b> <b>IN</b> <b>IN</b> <b>IN</b> <b>IN</b> <b>IN</b> <b>IN</b> <b>IN</b> <b>IN</b> <b>IN</b>	<b>WH</b> <sup>10</sup> - White <b>BK</b> <sup>10</sup> - Black <b>NA</b> - Not applicable  <sup>10</sup> Only available with MRO optics.	<b>WIO2</b> <sup>11</sup> - Widespread Indirect Optic <b>TIO</b> <sup>12</sup> - Translucent Indirect Optic <b>WAI2</b> <sup>12</sup> - Widespread Asymmetric Indirect Optic <b>NA</b> - Not applicable  <sup>11</sup> Not available with BIOSTU. <sup>12</sup> Not available with BIOS.	
LIGHT SOURCE	CRI	DIRECT LUMEN PACKAGE	INDIRECT LUMEN PACKAGE Specify NA for Direct fixture	COLOR TEMP.	CORNER TYPE <sup>21</sup>			
<b>SW</b> - Static white <b>BIOSS</b> <sup>13</sup> - BIOS Biological Static <b>BIOSDY</b> <sup>13</sup> - BIOS Biological Dynamic <b>BIOSTU</b> <sup>13</sup> - BIOS Biological Tunable	<b>80CRI</b> - 80+ CRI <b>90CRI</b> <sup>14</sup> - 90+ CRI  <sup>14</sup> Not available with BIOS.	<b>350LMF</b> - Eco low output 350 lm/ft <b>500LMF</b> - Low output 500 lm/ft <b>750LMF</b> - Medium output 750 lm/ft <b>1000LMF</b> <sup>15,16</sup> - High output 1000 lm/ft <b>NA</b> - Not applicable  <sup>15</sup> Not available with MBPL optic. <sup>16</sup> Not available with BIOS.	<b>350LMF</b> - Eco low output 350 lm/ft <b>500LMF</b> - Low output 500 lm/ft <b>750LMF</b> - Medium output 750 lm/ft <b>1000LMF</b> <sup>17,18,19</sup> - High output 1000 lm/ft <b>NA</b> - Not applicable  <sup>17</sup> Not available with WAI2. <sup>18</sup> For Direct/Indirect, Direct must not exceed 750 lm/ft. <sup>19</sup> Not available with BIOS.	<b>27K</b> <sup>20</sup> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>50K</b> <sup>20</sup> - 5000K	<b>#LEV2C(A##XX)</b> <sup>22</sup> - 2-way leveled corner <b>#LEV3C(A##XX)</b> <sup>23,24</sup> - 3-way leveled corner <b>#LEV4C(A##XX)</b> <sup>23,24</sup> - 4-way leveled corner  <sup>21</sup> Specify quantity (#), angle (A##), and optic (XX) for each required corner type. Separate codes with a "+" if more than one is required, e.g. 1LEV2C(A90HLO)+2LEV2C(A60BLA). <sup>22</sup> Minimum angle is 30°. <sup>23</sup> Minimum angle is 60°. <sup>24</sup> Separate angles with a "+" if more than one type is required, e.g.1LEV4C(A60+A90).	<b>ANGLE (A##):</b> <b>(A60)</b> - 60° <b>(A90)</b> - 90° <b>(A120)</b> - 120° <b>(A##)</b> - Custom	<b>OPTIC (XX):</b> <b>HLO</b> - High- Efficiency Lambertian Optic corner min 2'x2' <b>BLA</b> - Blank corner min 6"x6"	
<sup>13</sup> See page 7 for details.				<sup>20</sup> Not available with BIOS.				
VOLTAGE	DRIVER <sup>26</sup>	ELECTRICAL		ELECTRICAL SECTIONS (optional) <sup>33,34</sup>		MOUNTING <sup>39</sup>		
<b>120V</b> - 120V <b>277V</b> - 277V <b>UNV</b> - 120V-277V <b>347V</b> <sup>25</sup> - 347V	<b>DI</b> - 1% 0-10V <b>ELV</b> <sup>27</sup> - ELV 120V <b>TRI</b> <sup>27</sup> - TRIAC 120V <b>DA</b> <sup>28</sup> - DALI <b>LDE1</b> <sup>28</sup> - Lutron Hi-lume 1% Eco <b>ELD1</b> - eldoLED 1% ECOdrive 0-10V <b>ELDO</b> - eldoLED 0.1% SOLOdrive 0-10V  <sup>26</sup> PoE (Power-over-Ethernet) compatible. Consult factory for details. <sup>27</sup> Available with 120V only. <sup>28</sup> On-site commissioning is required.	<b>1C</b> - 1 circuit <b>2C</b> <sup>29</sup> - 2 circuits <b>#MC</b> <sup>30</sup> - Multi circuit <b>EC</b> - Emergency-powered fixture <b>NL</b> - Night light fixture <b>DL</b> - Daylight fixture <b>GTD</b> <sup>31,32</sup> - Generator transfer device fixture  <sup>29</sup> Available for Direct/Indirect only. Separate direct and indirect circuits. <sup>30</sup> Specify total number of circuits (#), including any required for electrical section or module options. Provide drawing or layout specifications. Minimum 4' section per circuit. <sup>31</sup> Minimum 4' fixture. <sup>32</sup> Not available with 347V.	<b>#EC##</b> <sup>35</sup> - Emergency-powered section <b>#NL##</b> <sup>35</sup> - Night light section <b>#DL##</b> <sup>35</sup> - Daylight section <b>#GTD##</b> <sup>35,36,37</sup> - Generator transfer device section <b>#EMB</b> <sup>37,38</sup> - Emergency battery <b>NA</b> - None  <sup>33</sup> Specify with multi circuit (#MC) electrical option only. <sup>34</sup> Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'. <sup>35</sup> Specify quantity (#), and section length in inches (##). <sup>36</sup> Minimum 4' section. <sup>37</sup> Not available with 347V. <sup>38</sup> Specify quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section. For Direct/Indirect, minimum 8' fixture.	<b>ACS</b> - Aircraft cable, standard <b>STS</b> - Stem, standard <b>ACC()</b> - Aircraft cable, custom <b>STC()</b> - Stem, custom  <sup>39</sup> Standard canopies are black for black fixtures, and white for all other finishes. See page 3 for full details on standard and custom options.				
<sup>25</sup> Available with DI driver only.								
FINISH <sup>40</sup>	CONTROL <sup>41</sup>	CONNECTED CONTROLS <sup>46</sup>			OPTIONS <sup>47</sup>		MODULE (optional) <sup>49,50</sup>	
<b>W</b> - Matte white <b>AL</b> - Aluminum <b>B</b> - Matte black <b>CF#</b> - Custom finish, specify RAL#	<b>STANDALONE CONTROLS</b> <sup>42,43</sup> Specify the quantity (#) of sensors per fixture. <b>#OMS</b> <sup>44</sup> - Onboard Occupancy <b>#OMS##</b> <sup>45</sup> - Onboard Occupancy with bi- level dimming <b>#ODS</b> - Onboard Daylight <b>#OCS</b> - Onboard Occupancy & Daylight  <b>NA</b> - None  <sup>40</sup> Blank finish will match fixture finish. <sup>41</sup> Standalone and connected control options cannot be combined. <sup>42</sup> Available with DI driver and 1 circuit options only. <sup>43</sup> Minimum 4' per zone. Provide control zone length.	<b>LU</b> - Lutron <b>AWN</b> - Lutron Athena Wireless Node RF Only <b>AWNS</b> - Lutron Athena Wireless Node Sensor <b>ENC</b> - Encelium  <b>WL</b> - Cooper Wavelinx <b>AN</b> - Acuity nLight <b>CA</b> - Casambi <b>LG</b> - Legrand  <sup>44</sup> Fixture turns off when no occupancy. <sup>45</sup> Fixture dims to specified light level % (##). <sup>46</sup> Consult factory for connected controls.	<b>FU120</b> - Fuse 120V <b>FU277</b> - Fuse 277V <b>CTB9</b> <sup>48</sup> - T-bar caddy clip, 9/16" <b>CTB15</b> <sup>48</sup> - T-bar caddy clip, 15/16" <b>CTG9</b> <sup>48</sup> - Tegular caddy clip, 9/16" <b>CTG15</b> <sup>48</sup> - Tegular caddy clip, 15/16" <b>CST</b> <sup>48</sup> - Screw slot caddy clip <b>NA</b> - None  <sup>47</sup> Separate codes with a "+" if more than one is specified. <sup>48</sup> Available with aircraft cable only.	<b>#AAM21()</b> - AAM 21° <b>#AAM30()</b> - AAM 30° <b>#AAM36()</b> - AAM 36° <b>#MS25()</b> - Micro Spot 25° <b>#MS35()</b> - Micro Spot 35° <b>#MS50()</b> - Micro Spot 50° <b>NA</b> - None  <sup>49</sup> See page 3 for ordering details. <sup>50</sup> Not available with the ELV/ TRIAC driver options.				



# SQUERO COMBINATION

PENDANT PATTERN

STATIC WHITE, BIOS



## Module Code

For a module, specify the options in the parentheses.  
The light source is static white.  
CRI of module matches specification of main fixture.

Examples: 1AAM21(5W-35K-W-NA)  
1MS25(5W-27K-W)

MODULE (optional)				
MODULE <sup>1,2</sup>	WATTAGE	COLOR TEMPERATURE	FINISH	OPTION
<b>#AAM21()</b> - AAM 21° <b>#AAM30()</b> - AAM 30° <b>#AAM36()</b> - AAM 36°  <sup>1</sup> Specify quantity (#). <sup>2</sup> 6" blank per module. Blank finish will match fixture finish.	<b>5W</b> - 5 W, up to 364 lm output <b>8W</b> - 8 W, up to 624 lm output	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>50K</b> - 5000K	<b>W</b> - Matte white <b>B</b> - Matte black	<b>HCL</b> - Honeycomb louver <b>NA</b> - None
MODULE <sup>1,2</sup>	WATTAGE	COLOR TEMPERATURE	FINISH	
<b>#MS25()</b> - Micro Spot 25° <b>#MS35()</b> - Micro Spot 35° <b>#MS50()</b> - Micro Spot 50°  <sup>1</sup> Specify quantity (#). <sup>2</sup> 6" blank per module. Blank finish will match fixture finish.	<b>5W</b> - 5 W, up to 430 lm output	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>50K</b> - 5000K	<b>W</b> - Matte white <b>B</b> - Matte black	

## Pendant Mounting Code

### Aircraft Cable

#### Standard

##### ACS - Aircraft cable, standard

- Ø 5" for power canopy
- Ø 3" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Power cord is black for black fixtures, and white for all other fixture finishes
- Aircraft cable length is 36"

#### Custom

Example: ACC(3NPC-72IN-W-PCB-NA)

##### ACC() - Aircraft cable, custom

NON-POWER CANOPY SIZE	AIRCRAFT CABLE LENGTH	CANOPY FINISH	POWER CORD COLOR	OPTION
<b>3NPC</b> - Ø 3" non-power canopy <b>5NPC</b> - Ø 5" non-power canopy	<b>36IN</b> - 36" <b>72IN</b> - 72" <b>120IN</b> - 120" <b>#IN</b> <sup>1</sup> - Other lengths, specify in inches  <sup>1</sup> Maximum length is 288". For longer lengths, please consult factory.	<b>W</b> - Matte white <b>AL</b> - Aluminum <b>B</b> - Matte black <b>CF#</b> - Custom finish, specify RAL#	<b>PCW</b> - White <b>PCB</b> - Black	<b>SEM</b> <sup>2</sup> - Seismic mounting <b>SLC</b> <sup>2</sup> - Sloped ceiling for aircraft cable <b>NA</b> - None  <sup>2</sup> Not available with the Ø 3" non-power canopy size.

### Stem

#### Standard

##### STS - Stem, standard

- Ø 5" for power canopy
- Ø 5" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Stem finish is the same color as fixture
- Stem length is 18"
- Stem is not field adjustable

#### Custom

Example: STC(5NPC-36IN-W-STW-SLS)

##### STC() - Stem, custom

NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	OPTION
<b>5NPC</b> - Ø 5" non-power canopy	<b>18IN</b> - 18" <b>36IN</b> - 36" <b>#IN</b> <sup>3</sup> - Specify length in inches  <sup>3</sup> Minimum length is 6". Maximum length is 72". Stem is not field adjustable.	<b>W</b> - Matte white <b>AL</b> - Aluminum <b>B</b> - Matte black <b>CF#</b> - Custom finish, specify RAL#	<b>STW</b> - Matte white <b>STAL</b> - Aluminum <b>STB</b> - Matte black <b>STCF#</b> - Custom finish, specify RAL#	<b>SLS</b> - Sloped ceiling for stem <b>NA</b> - None


# SQUERO COMBINATION

PENDANT PATTERN

STATIC WHITE, BIOS




## Dimensions

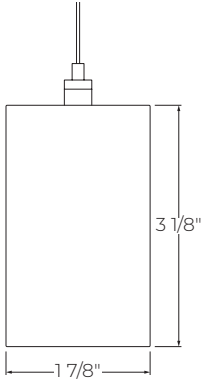


## Pattern Layout

### CORNER TYPES

#### LEVELED CORNERS

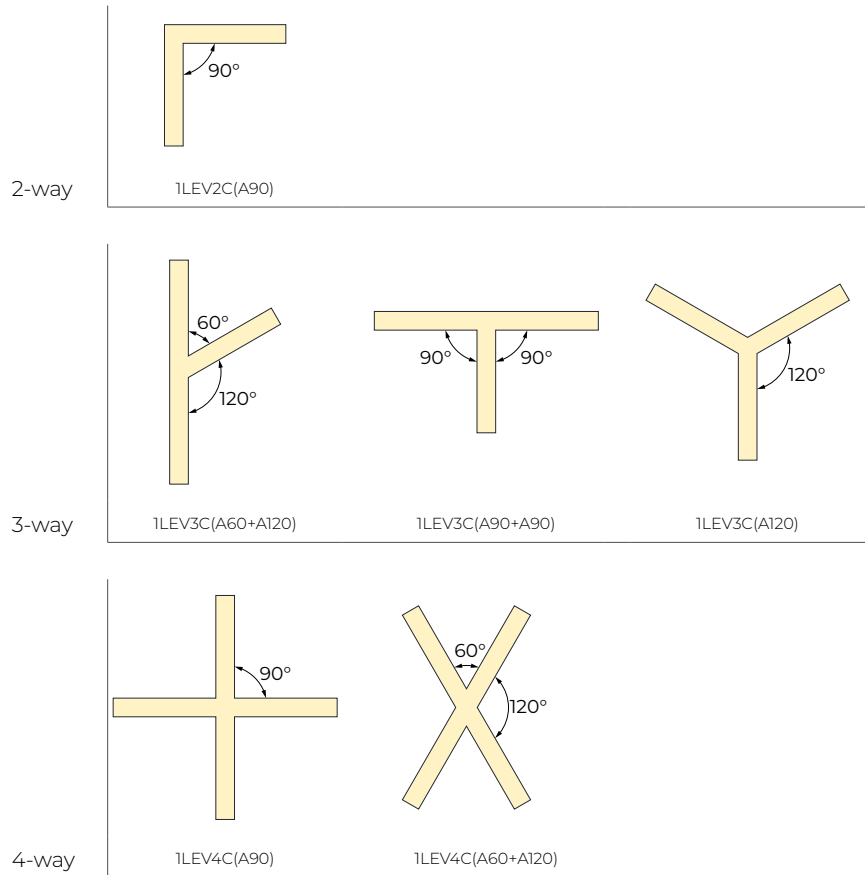

### EXAMPLES

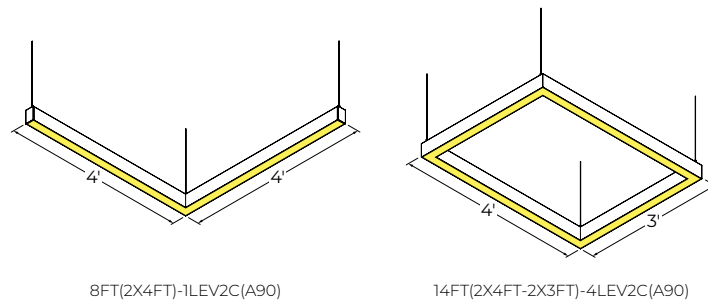

# SQUERO COMBINATION

PENDANT PATTERN

STATIC WHITE, BIOS




## Photometrics

Values calculated based on a 4' fixture at 3500K and 80+ CRI for all optics.


### DIRECT OPTICS

MRO18




LM/FT	W/FT	LM/W
350	2.7	130
500	4.0	125
750	6.4	118
1000	9.1	110

MRO35




LM/FT	W/FT	LM/W
350	2.9	121
500	4.3	116
750	6.9	108
1000	9.9	101

MRO55




LM/FT	W/FT	LM/W
350	3.2	109
500	4.8	104
750	7.7	97
1000	11.0	91

HLO




LM/FT	W/FT	LM/W
350	3.1	112
500	4.6	108
750	7.3	103
1000	10.2	98

MBPL




LM/FT	W/FT	LM/W
350	5.2	67
500	7.5	66
750	11.7	64

MPL



LM/FT	W/FT	LM/W
350	3.5	99
500	5.1	98
750	7.7	98
1000	10.6	95

SPL



LM/FT	W/FT	LM/W
350	3.1	113
500	4.4	113
750	6.7	112
1000	9.1	109

### MULTIPLIER TABLES - CCT/CRI

Use these tables to get results for different color temperatures and CRI for all Direct and Indirect photometric tables.

MRO18 / MRO35 / MRO55

CCT	WATTS		LPW	
	80+ CRI	90+ CRI	80+ CRI	90+ CRI
2700K	1.04	1.19	0.96	0.84
3000K	1.00	1.15	1.00	0.87
3500K	1.00	1.12	1.00	0.89
4000K	0.99	1.10	1.01	0.91
5000K	0.94	1.06	1.06	0.94

MBPL / MPL / SPL

CCT	WATTS		LPW	
	80+ CRI	90+ CRI	80+ CRI	90+ CRI
2700K	1.04	1.19	0.96	0.84
3000K	1.00	1.15	1.00	0.87
3500K	1.00	1.12	1.00	0.89
4000K	0.99	1.10	1.01	0.91
5000K	0.94	1.06	1.06	0.94

HLO

CCT	WATTS		LPW	
	80+ CRI	90+ CRI	80+ CRI	90+ CRI
2700K	1.05	1.27	0.95	0.79
3000K	1.02	1.23	0.98	0.81
3500K	1.00	1.19	1.00	0.84
4000K	1.00	1.19	1.00	0.84
5000K	0.96	1.12	1.04	0.89

# SQUERO COMBINATION

PENDANT PATTERN


STATIC WHITE, BIOS



Values calculated based on a 4' fixture at 3500K and 80+ CRI for all optics.


## INDIRECT OPTICS

WIO2




LM/FT	W/FT	LM/W
350	2.4	145
500	3.5	141
750	5.5	136
1000	7.7	130

TIO



LM/FT	W/FT	LM/W
350	2.8	127
500	4.0	124
750	6.3	119
1000	8.8	114

WAI2



LM/FT	W/FT	LM/W
350	2.5	139
500	3.7	135
750	5.8	130

## MULTIPLIER TABLES - CCT/CRI

Use these tables to get results for different color temperatures and CRI for all Direct and Indirect photometric tables.

WIO2 / TIO / WAI2


CCT	WATTS		LPW	
	80+ CRI	90+ CRI	80+ CRI	90+ CRI
2700K	1.05	1.27	0.95	0.79
3000K	1.02	1.23	0.98	0.81
3500K	1.00	1.19	1.00	0.84
4000K	1.00	1.19	1.00	0.84
5000K	0.96	1.12	1.04	0.89

## DIRECT/INDIRECT - LPW CALCULATION


For Direct/Indirect performance values, follow the formula.

$$\left( \frac{\text{DIRECT LM/FT} + \text{INDIRECT LM/FT}}{\text{DIRECT W/FT} + \text{INDIRECT W/FT}} \right) = \text{LPW}$$


## AAM MODULE



AAM 21°



AAM 30°




AAM 36°


### DELIVERED LUMENS

Wattage	5.0									
CRI	80+					90+				
CCT	2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
Lumen	323	340	350	357	364	265	279	289	299	312
Wattage	8.0									
CRI	80+					90+				
CCT	2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
Lumen	553	583	600	612	624	454	478	495	513	534


## MICRO SPOT MODULE



Micro Spot 25°



Micro Spot 35°



Micro Spot 50°

### DELIVERED LUMENS

Wattage	5.0									
CRI	80+					90+				
CCT	2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
Lumen	373	400	400	432	432	324	344	344	345	372

# SQUERO COMBINATION


PENDANT PATTERN

STATIC WHITE, BIOS



## BIOS

Three BIOS Circadian LED solutions are offered – Biological Static, Biological Dynamic, and Biological Tunable. Use the decision tree below to identify when and where to use BIOS Wellness LED Lighting Solutions.

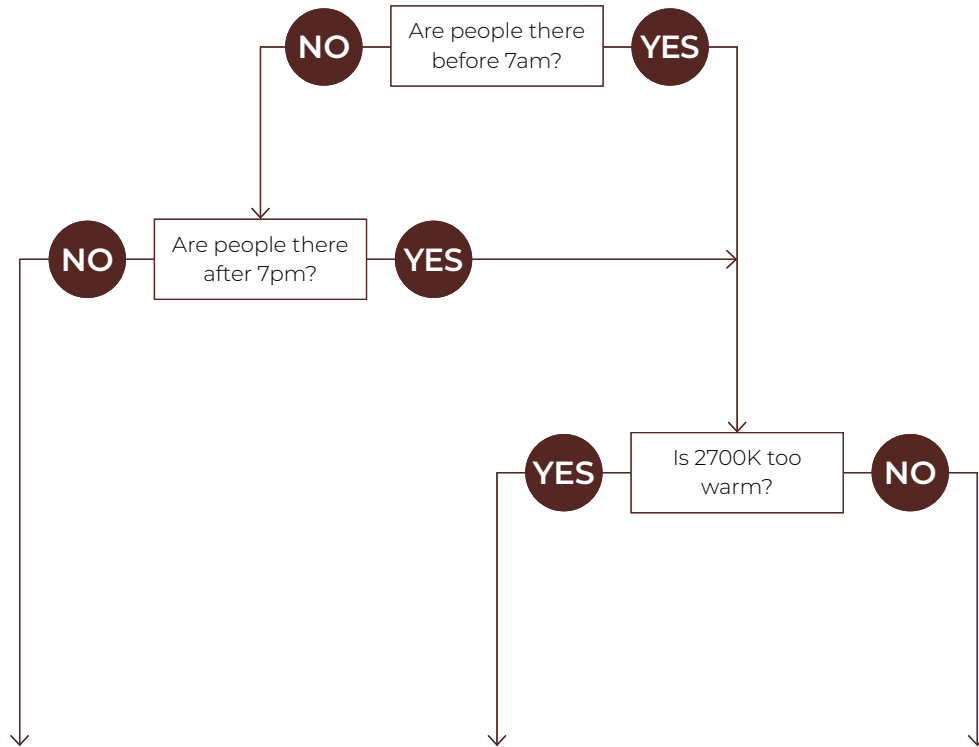

Biological Static BIOSST	Biological Dynamic BIOSDY	Biological Tunable BIOSTU
No CCT change when dimmed	500K shift when dimmed	Dims to 2700K
Daytime solution	Daytime + evening solution	Daytime + evening solution
Spaces in operation during daytime hours, between 7am and 7pm	Spaces in operation overnight, after 7pm and before 7am, and when CCT color shift in the evening is not preferred	Suitable for spaces in operation overnight, after 7pm and before 7am, and where people do not sleep (CCT color shift in the evening is preferred)
E.g. offices, medical/dental offices	E.g. hospitals	E.g. offices, shiftwork

# SQUERO COMBINATION

PENDANT PATTERN

STATIC WHITE, BIOS



## Technical Specifications

### DIRECT OPTICS

#### Miniature Reflector Optic (MRO)

Locates individual, precisely molded TIR elements over each LED emitter, and further shield the source with precise parabolic reflectors. The controlled beam is remarkably comfortable – especially in a small LED luminaire.

MRO is available in a specular black or gloss white finish and creates a distinctive visual texture.

Different TIR elements offer a choice of beam spreads: narrow (18° with SC of 0.3), medium (35° with SC of 0.6), and wide (55° with SC of 0.9). These concentrated distributions can provide effective task illumination in a variety of applications.

Each MRO module is 6" long with five optical chambers.



#### Parabolic Louvers (MBPL, MPL & SPL)

Parabolic Louver Optics provide excellent shielding and a pleasing crisp visual texture. The precisely molded louvers consist of 1" deep blades and side reflectors with shielding of 50° lengthwise and 45° crosswise.

The parabolic contour of the blades and side reflectors direct light into a comfortable downlight distribution with a spacing criterion of 1.1, while minimizing shadows from the LED array above each cell.

Three finishes are available: matte black, matte, and specular. Specular (SPL) provides higher efficacy, sharper cut-off, and an ultra quiet appearance at shallow viewing angles. Matte (MPL) offers a softer appearance, a wider beam spread, and gentle brightness transition at cut-off. Matte black (MBPL) offers the lowest UGR in Squero as the black parabolic louver is very quiet and glare free. The UGR is the best in class rating of under 10.



#### High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) shielding of diffusing 0.075" thick acrylic with up to 88% transmission and good source obscuration is combined with matte white side reflectors to create an efficient optical chamber with uniform luminosity.

Luminaire brightness is controlled by the flux-to-shielding area ratio. For visual comfort, avoid high lumen output unless Squero is installed in a high ceiling application. Spacing criteria: 1.2 (longitudinal) x 1.1 (lateral).



#### Blank (BLA)

Blank covers provide spacing – functional or rhythmic – in the direct component of a Squero Combination luminaire. Covers are sized according to the Combination design, finished to match the luminaire housing, and snap into the aperture.



### INDIRECT OPTICS

#### Widespread Indirect Optic (WIO2)

The Widespread Indirect Optic (WIO2) is a horizontal LED array with a widespread indirect micro prismatic optic that offers an impressive 160° spread. WIO2 creates an even illumination for smooth brightness on the ceiling that can achieve uniformity ratios of up to 2:1.

#### Uniformity [max/min]

Based on 18' continuous runs, in a 20' x 40' room, 10' wall height

Mounting height from ceiling	Spacing (Center to center)		
	8'	10'	12'
12"	5.5	10.0	9.0
18"	3.5	6.0	6.0
24"	2.5	4.0	4.5

#### Translucent Indirect Optic (TIO)

The Translucent Indirect Optic (TIO) is composed of a horizontal LED array that has a translucent lens to mask pixilation from the diodes. TIO has a 100° spread in the indirect that is ideal when the fixture is mounted farther away from the ceiling.

#### Widespread Asymmetric Indirect Optic (WAI2)

The Widespread Asymmetric Indirect Optic (WAI2) offers an upward grazing effect with a 45° forward throw. It softly highlights the ceiling in the up-light while distributing the required illumination of the rest of an interior space. For avoiding glare and enjoying visual comfort, WAI2 is an ideal solution.

### LIGHT SOURCE

#### Static white

Custom linear array of high-flux LEDs mounted onto aluminum-backed circuitry with quick-connect wiring to facilitate service and optimize thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

# SQUERO COMBINATION


PENDANT PATTERN

STATIC WHITE, BIOS



## BIOS

BIOS SkyBlue™ Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being. The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (490 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.

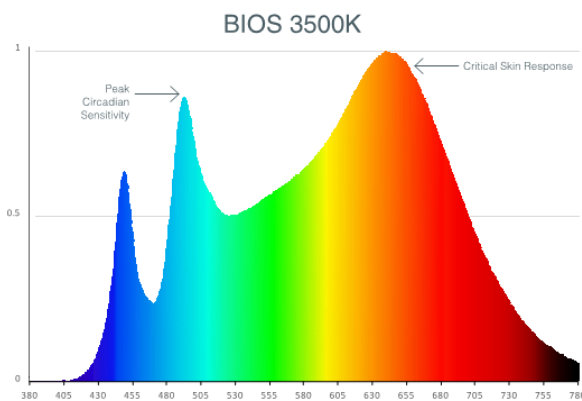

Three BIOS solutions are offered: BIOS Biological Static (BIOSST), BIOS Biological Dynamic (BIOSDY), and BIOS Biological Tunable (BIOSTU). See page 7 for details.

## PATTERN LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

## ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

## PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

## ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

## Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.

Code: 2MC-2EC96

Example 2: A 16' Direct/Indirect fixture with separate circuits for direct and indirect, and with one 4' night light section on the direct side on a third circuit.

Code: 3MC-1NL48

Example 3: A 24' Direct fixture with one 4' generator transfer device section.

Code: 1MC-1GTD48

## Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

# SQUERO COMBINATION

PENDANT PATTERN

STATIC WHITE, BIOS



## MOUNTING

Pendant fixtures can be mounted either with aircraft cable or with stem. See page 3 for details.

## FINISH

**Interior:** 95%, reflective matte powder coated white paint

**Exterior:** Matte white, matte black, or aluminum powder coating. Custom finishes are also available.

## CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



## Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Three types are available:

**OMS:** An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

**ODS:** An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

**OCS:** Both an occupancy and a daylight sensor are installed in the luminaire.

## Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.


Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.

Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

## INTEGRATED TRACK

The integrated track is available with single units and continuous runs, with or without sections of integrated LED. Two options are available: one supplied and installed by Lumenwerx, and the other by others and installed by Lumenwerx. Detailed specifications of the track system must be supplied. Consult factory for details.



# SQUERO COMBINATION

PENDANT PATTERN



STATIC WHITE, BIOS



## ADJUSTABLE ACCENT MODULE

The Adjustable Accent Module (AAM) features a  $\varnothing 1 9/16"$  x  $3 1/4"$  cylinder that rotates  $360^\circ$  and tilts  $90^\circ$ . The LED light source is coupled with TIR optics to provide beam angles of  $21^\circ$ ,  $30^\circ$ , and  $36^\circ$  while producing up to 600 lumens. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K, available in either 80+ CRI or 90+ CRI.

The AAM module can be selected in either a white or black finish and a honeycomb louver accessory is also available. The AAM driver is mounted above the cylinder, inside the SQUERO housing and accepts universal input voltage (120-277 VAC) while providing 0-10V dimming control.

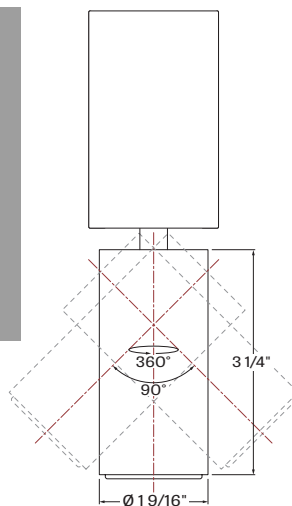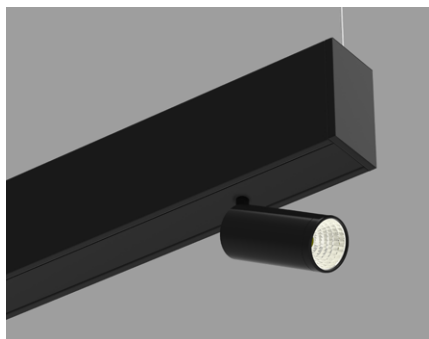

## CONSTRUCTION

**Housing:** Extruded aluminum, up to 90% recycled content

**Interior brackets:** Die-formed cold rolled steel sheet

**Joining system:** Die-cast aluminum

**Louvers:** Injection molded optical grade polycarbonate, up to 95% reflective

**Light guide:** Clear PMMA laminated with microstructure film formed into optical TIR/extraction form

**End caps:** Die-cast aluminum

**Hanger:** Chromed griplock securely attached in end caps and/or joiners with stainless steel hardware

**Aircraft cable suspension:**  $\varnothing 1/16"$  stainless steel aircraft cable

**Stem:**  $\varnothing 1/2"$  threaded steel tube

## CERTIFICATIONS

**ETL:** Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

**Declare:** [LBC Red List Approved](#)

## WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

## MICRO SPOT MODULE

The Micro Spot is a  $\varnothing 7/8"$  x  $1 5/16"$  adjustable spotlight that extends, retracts, rotates  $360^\circ$ , and tilts  $90^\circ$ . Its LED light source is coupled with a TIR refractor to provide beam angles of  $25^\circ$ ,  $35^\circ$ , and  $50^\circ$ , while producing up to 400 lumens. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K, available in either 80+ CRI or 90+ CRI. The Micro Spot is offered in either a white or black finish. The Micro Spot driver is mounted within the luminaire housing and accepts universal input voltage (120-277 VAC) with 0-10V dimming control.

