

# VIA 2 PENDANT


DIRECT/INDIRECT, DIRECT, INDIRECT  
 STATIC WHITE, BIOS



Declare.



## Lens Positions

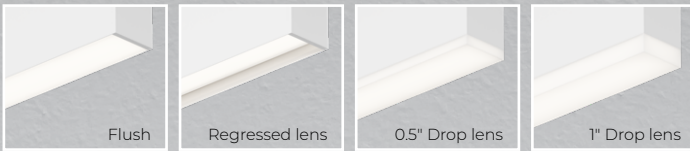

**SENSORS**  
 For latest information on sensors, click [here](#).

## Module Options



Our elegant, flexible Via family is composed of linear, pendant, surface, recessed, and wall mounted luminaires. Each lighting fixture can be installed as a discrete luminaire or in continuous runs or patterns. Via 2 Pendant is offered with Lambertian, asymmetric, widespread, wall wash, or low-glare optics.

## DIRECT



## INDIRECT



# VIA 2 PENDANT



DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS

Project: \_\_\_\_\_  
 \_\_\_\_\_  
 Type: \_\_\_\_\_  
 \_\_\_\_\_

## Order Guide

LUMINAIRE ID	DISTRIBUTION	DIRECT OPTIC Specify NA for Indirect or track only fixture	LENS POSITION Specify NA for Indirect fixture	INDIRECT OPTIC Specify NA for Direct fixture	LIGHT SOURCE <sup>9</sup>	
<b>VIA2P</b>						
<b>VIA2P</b> - Via 2" Pendant	<b>DI</b> - Direct/Indirect <b>D</b> - Direct <b>I</b> - Indirect	<b>HLO</b> - High-Efficiency Lambertian Optic <b>ARO2</b> - Asymmetric Refractive Optic <b>WRO2</b> - Wall Wash Refractive Optic <b>WDO</b> - Widespread Direct Optic <b>LGO</b> - Low-Glare Optic <b>MPO</b> - Micro-Prismatic Optic <b>DDO</b> - Domed Deglare Optic <b>NA</b> <sup>1</sup> - Not applicable  <sup>1</sup> Specify for an Indirect fixture or when only the track option is required. <sup>2</sup> See page 3 for ordering details. <sup>3</sup> Consult factory for other track options.	<u>Track option (optional)</u> <sup>2,3</sup> <b>+ITRLMX()</b> - Integrated track by Lumenwerx	<b>FH</b> <sup>4</sup> - Flush <b>RG</b> <sup>4</sup> - Regressed <b>0.5D</b> <sup>4</sup> - 0.5" drop <b>1.0D</b> <sup>4</sup> - 1.0" drop <b>NA</b> <sup>4</sup> - Not applicable  <sup>4</sup> For HLO, specify FH, RG, 0.5D, or 1.0D. <sup>5</sup> For ARO2, WRO2, WDO, LGO, MPO, and DDO, specify FH. <sup>6</sup> For an Indirect fixture, specify NA.	<b>WIO2</b> <sup>5</sup> - Widespread Indirect Optic <b>TIO</b> <sup>6</sup> - Translucent Indirect Optic <b>WAI2</b> <sup>7</sup> - Widespread Asymmetric Indirect Optic <b>HLO</b> <sup>8</sup> - High-Efficiency Lambertian Optic <b>ARO2</b> <sup>8</sup> - Asymmetric Refractive Optic <b>NA</b> - Not applicable  <sup>5</sup> Not available with BIOSTU. <sup>6</sup> Available only with Direct/Indirect. <sup>7</sup> Not available with BIOS. <sup>8</sup> Not available with Direct/Indirect.	<b>SW</b> - Static white  <b>BIOST</b> <sup>10,11</sup> - BIOS Biological Static <b>BIOSDY</b> <sup>10,11</sup> - BIOS Biological Dynamic <b>BIOSTU</b> <sup>10,11</sup> - BIOS Biological Tunable  <sup>9</sup> Chromawerx SOLA, DUO, and QUADRO also available. Consult other spec sheets. <sup>10</sup> Only available with low and medium lumen packages. <sup>11</sup> See page 8 for details.

CRI	DIRECT LUMEN PACKAGE Specify NA for Indirect or track only fixture	INDIRECT LUMEN PACKAGE Specify NA for Direct fixture	COLOR TEMP.	LUMINAIRE LENGTH	VOLTAGE
<b>80CRI</b> - 80+ CRI <b>90CRI</b> <sup>12</sup> - 90+ CRI  <sup>12</sup> Not available with BIOS.	<b>200LMF</b> <sup>13,14</sup> - Hypo output 200 lm/ft <b>350LMF</b> - Low output 350 lm/ft <b>500LMF</b> - Medium output 500 lm/ft <b>750LMF</b> - High output 750 lm/ft <b>1000LMF</b> <sup>15,16</sup> - Ultra high output 1000 lm/ft <b>1200LMF</b> <sup>17,18,19</sup> - Hyper output 1200 lm/ft <b>NA</b> - Not applicable  <sup>13</sup> Minimum 4' fixture. <sup>14</sup> Not available with ELV/TRI driver options. <sup>15</sup> For Direct/Indirect, indirect must not exceed 750 lm/ft. <sup>16</sup> Not available with LGO. <sup>17</sup> Not available with WDO/LGO/MPO/DDO.	<b>200LMF</b> <sup>13,14</sup> - Hypo output 200 lm/ft <b>350LMF</b> - Low output 350 lm/ft <b>500LMF</b> - Medium output 500 lm/ft <b>750LMF</b> <sup>20</sup> - High output 750 lm/ft <b>1000LMF</b> <sup>21</sup> - Ultra high output 1000 lm/ft <b>1200LMF</b> <sup>19,22</sup> - Hyper output 1200 lm/ft <b>NA</b> - Not applicable  <sup>18</sup> For Direct/Indirect, Indirect must not exceed 500 lm/ft. <sup>19</sup> Fixture will be very bright. Use in suitable applications. <sup>20</sup> For Direct/Indirect, Direct must not exceed 1000 lm/ft. <sup>21</sup> For Direct/Indirect, Direct must not exceed 750 lm/ft, 500 lm/ft for LGO. <sup>22</sup> For Direct/Indirect, Direct must not exceed 500 lm/ft.	<b>27K</b> <sup>23</sup> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>50K</b> <sup>23</sup> - 5000K  <sup>23</sup> Not available with BIOS.	<b>#FT#IN</b> <sup>24,25</sup> - Specify nominal length (#) in 1' and/or 1" increments  <b>Standard nominal lengths:</b> Single units: 2' to 12' (up to 8' for MPO and DDO) Continuous runs: lengths over 12' (8' for MPO and DDO)  <sup>24</sup> Minimum 3' for Direct/Indirect. <sup>25</sup> Available in 2' increments only with BIOSTU/BIOSDY.	<b>120V</b> - 120V <b>277V</b> - 277V <b>UNV</b> - 120V-277V <b>347V</b> <sup>26</sup> - 347V  <sup>26</sup> Available with D1 driver only.

DRIVER <sup>27</sup>	ELECTRICAL	ELECTRICAL SECTIONS (optional) <sup>34,35</sup>	MOUNTING <sup>40</sup>
<b>DI</b> - 1% 0-10V <b>DA</b> <sup>28</sup> - DALI <b>LDE1</b> <sup>28</sup> - Lutron Hi-lume 1% Eco <b>ELD1</b> - eldoLED 1% ECOdrive 0-10V <b>ELDO</b> - eldoLED 0.1% SOLOdrive 0-10V <b>ELV</b> <sup>29</sup> - ELV 120V <b>TRI</b> <sup>29</sup> - TRIAC 120V  <sup>27</sup> PoE (Power-over-Ethernet) compatible. Consult factory for details. <sup>28</sup> On-site commissioning is required. <sup>29</sup> Available with 120V only.	<b>1C</b> - 1 circuit <b>2C</b> <sup>30</sup> - 2 circuits <b>#MC</b> <sup>31</sup> - Multi circuit <b>EC</b> - Emergency-powered fixture <b>NL</b> - Night light fixture <b>DL</b> - Daylight fixture <b>GTD</b> <sup>32,33</sup> - Generator transfer device fixture  <sup>30</sup> Available for Direct/Indirect only. Separate direct and indirect circuits. <sup>31</sup> Specify total number of circuits (#), including any required for electrical section or module options. Provide drawing or layout specifications. Minimum 4' section per circuit. <sup>32</sup> Minimum 4' fixture. <sup>33</sup> Not available with 347V.	<b>#EC##</b> <sup>36</sup> - Emergency-powered section <b>#NL##</b> <sup>36</sup> - Night light section <b>#DL##</b> <sup>36</sup> - Daylight section <b>#GTD##</b> <sup>36,37,38</sup> - Generator transfer device section <b>#EMB</b> <sup>38,39</sup> - Emergency battery <b>NA</b> - None  <sup>34</sup> Specify with multi circuit (#MC) electrical option only. <sup>35</sup> Provide drawing or layout specifications. Consult factory for other configurations. Default section length is 4'. <sup>36</sup> Specify quantity (#), and section length in inches (##). <sup>37</sup> Minimum 4' section. <sup>38</sup> Not available with 347V. <sup>39</sup> Specify quantity (#). All batteries will be on the same circuit. Each battery powers a 4' section. For Direct/Indirect, minimum 8' fixture.	<b>ACS</b> - Aircraft cable, standard <b>STS</b> - Stem, standard <b>ACC()</b> - Aircraft cable, custom <b>STC()</b> - Stem, custom  <sup>40</sup> Standard canopies are black for black fixtures, and white for all other finishes. See page 3 for full details on standard and custom options.

FINISH	CONTROL <sup>41,42</sup>	OPTIONS <sup>48</sup>	MODULE (optional) <sup>50</sup>
<b>W</b> - Matte white <b>AL</b> - Aluminum <b>B</b> - Matte black <b>CF#</b> - Custom finish, specify RAL#	<b>STANDALONE CONTROLS</b> <sup>43,44</sup> Specify the quantity (#) of sensors per fixture. <b>#OMS</b> <sup>45</sup> - Onboard Occupancy <b>#OMS##</b> <sup>46</sup> - Onboard Occupancy with bi-level dimming <b>#ODS</b> - Onboard Daylight <b>#OCS</b> - Onboard Occupancy & Daylight  <b>CONNECTED CONTROLS</b> <sup>47</sup> <b>LU</b> - Lutron <b>AWNR</b> - Lutron Athena Wireless Node RF Only <b>AWNS</b> - Lutron Athena Wireless Node Sensor <b>ENC</b> - Encelium <b>WL</b> - Cooper Wavelinx <b>AN</b> - Acuity nLight <b>CA</b> - Casambi <b>LG</b> - Legrand  <b>NA</b> - None  <sup>41</sup> Standalone and connected control options cannot be combined. <sup>42</sup> Available with flush lens option only. <sup>43</sup> Available with D1 driver and 1 circuit options only. <sup>44</sup> Minimum 4' per zone. Provide control zone length. <sup>45</sup> Fixture turns off when no occupancy. <sup>46</sup> Fixture dims to specified light level % (##). <sup>47</sup> Consult factory for connected controls.	<b>FU120</b> - Fuse 120V <b>FU277</b> - Fuse 277V <b>CTB9</b> <sup>49</sup> - T-bar caddy clip, 9/16" <b>CTB15</b> <sup>49</sup> - T-bar caddy clip, 15/16" <b>CTC9</b> <sup>49</sup> - Tegular caddy clip, 9/16" <b>CTG15</b> <sup>49</sup> - Tegular caddy clip, 15/16" <b>CST</b> <sup>49</sup> - Screw slot caddy clip <b>NA</b> - None  <sup>48</sup> Separate codes with a "*" if more than one is specified. <sup>49</sup> Available with aircraft cable only.	<b>#DOTIM()</b> - Dot 1.5" <b>#PETI()</b> - Petite 1" Downlight <b>#PETIGLR()</b> - Petite 1" Downlight with glow ring <b>NA</b> - None  <sup>50</sup> See page 3 for ordering details. • Not available with track option. • Only available with static white. • Only available with flush lens. • Not available with ELV/TRI driver options. • Not available with EMB. • Consult factory for compatibility with controls.



# VIA 2 PENDANT



DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS

## Track Code

Example: +ITRLMX(4FT-GES-BK)

TRACK <sup>1,2,3</sup>	TRACK LENGTH	TRACK TYPE <sup>4</sup>		TRACK FINISH
<b>+ITRLMX()</b> - Integrated track by Lumenwerx  <sup>1</sup> For a track, specify the options in the parentheses. <sup>2</sup> Track heads not included. <sup>3</sup> Consult factory for other track options.	<b>#FT#IN</b> - Specify nominal track length (#) in 1' and/or 1" increments	<b>GES</b> - Global single circuit 120V track <b>TEK</b> - Global 2-circuit 120V track <b>HTEK</b> - Global 2-circuit 277V track	<b>XTS</b> - Global 3-circuit 120V track (common neutral) <b>XTSC</b> <sup>5</sup> - Global 3-circuit 120V track with 0-10V dimming (common neutral)	<b>WH</b> - White <b>BK</b> - Black <b>GR</b> - Gray
		<sup>4</sup> Must specify appropriate fixture voltage. <sup>5</sup> Only available with DI, ELD1, and ELD0 driver options.		

## Module Code

- For a module, specify the options in the parentheses.
- The light source is static white.
- CRI of module matches specification of main fixture.
- Minimum 4' fixture and minimum 2' section per module. Consult factory for other configurations.

Example: 1DOTIM(4IN-FTMB-SDB-FTMB-20DEG-900LM-27K)

MODULE <sup>1,2</sup>	HEIGHT	CYLINDER FINISH	BAFFLE	BAFFLE FINISH	BEAM ANGLE	LUMEN PACKAGE	COLOR TEMP.
<b>#DOTIM()</b> - Dot 1.5"  <sup>1</sup> Specify quantity (#). <sup>2</sup> 4" blank per module. Blank finish will match fixture finish.	<b>4IN</b> - 4"	<b>FTMB</b> - Matte black <b>FTMW</b> - Matte white <b>CF#</b> - Custom finish, specify RAL #	<b>SDB</b> - Standard baffle <b>DCB</b> <sup>3</sup> - Decorative baffle	<b>FTMB</b> - Matte black <b>FTMW</b> - Matte white <b>CF#</b> - Custom finish, specify RAL #	<b>20DEG</b> - 20° Spot <b>35DEG</b> - 35° Narrow flood <b>50DEG</b> - 50° Wide flood	<b>900LM</b> - 900 lm, 12.2 W <b>1120LM</b> - 1120 lm, 15.9 W	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K
			<sup>3</sup> Recommended when a different finish is desired for the baffle.				

Example: 1PETI(6W-35DEG-27K-SDL-FTMB)

MODULE <sup>1,2</sup>	WATTAGE	BEAM ANGLE	COLOR TEMP.	LENS AT BAFFLE	BAFFLE FINISH Specify NA for PETIGLR
<b>#PETI()</b> <sup>3</sup> - Petite 1" Downlight <b>#PETIGLR()</b> - Petite 1" Downlight with glow ring  <sup>1</sup> Specify quantity (#). <sup>2</sup> 4" blank per module. Blank finish will match fixture finish. <sup>3</sup> Module is trimless.	<b>6W</b> - 6 W output, up to 472 lm <b>10W</b> - 10 W output, up to 726 lm	<b>35DEG</b> - 35° Narrow flood <b>45DEG</b> - 45° Flood	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>50K</b> - 5000K	<b>SDL</b> - Soft diffused lens, solite	<b>FTMB</b> - Matte black <b>FTMW</b> - Matte white <b>FSPC</b> - Satin silver <b>FSSPC</b> - Matte silver <b>FCHP</b> - Champagne <b>FDBZ</b> - Dark bronze <b>CF#</b> - Custom finish, specify RAL# <b>NA</b> - Not applicable

## Pendant Mounting Code

### Aircraft Cable

#### Standard

**ACS** - Aircraft cable, standard

- Ø 5" for power canopy
- Ø 3" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Power cord is black for black fixtures, and white for all other fixture finishes
- Aircraft cable length is 36"

#### Custom

Example: ACC(3NPC-72IN-W-PCB-NA)

**ACC()** - Aircraft cable, custom

NON-POWER CANOPY SIZE	AIRCRAFT CABLE LENGTH	CANOPY FINISH	POWER CORD COLOR	OPTION
<b>3NPC</b> - Ø 3" non-power canopy <b>5NPC</b> - Ø 5" non-power canopy	<b>36IN</b> - 36" <b>72IN</b> - 72" <b>120IN</b> - 120" <b>#IN</b> <sup>1</sup> - Other lengths, specify in inches	<b>W</b> - Matte white <b>AL</b> - Aluminum <b>B</b> - Matte black <b>CF#</b> - Custom finish, specify RAL#	<b>PCW</b> - White <b>PCB</b> - Black	<b>SEM</b> <sup>2</sup> - Seismic mounting <b>SLS</b> <sup>2</sup> - Sloped ceiling for aircraft cable <b>NA</b> - None
	<sup>1</sup> Maximum length is 288". For longer lengths, please consult factory.			<sup>2</sup> Not available with the Ø 3" non-power canopy size.

### Stem

#### Standard

**STS** - Stem, standard

- Ø 5" for power canopy
- Ø 5" for non-power canopy
- Canopies are black for black fixtures, and white for all other fixture finishes
- Stem finish is the same color as fixture
- Stem length is 18"
- Stem is not field adjustable

#### Custom

Example: STC(5NPC-36IN-W-STW-SLS)

**STC()** - Stem, custom

NON-POWER CANOPY SIZE	STEM LENGTH	CANOPY FINISH	STEM COLOR	OPTION
<b>5NPC</b> - Ø 5" non-power canopy	<b>18IN</b> - 18" <b>36IN</b> - 36" <b>#IN</b> <sup>3</sup> - Specify length in inches	<b>W</b> - Matte white <b>AL</b> - Aluminum <b>B</b> - Matte black <b>CF#</b> - Custom finish, specify RAL#	<b>STW</b> - Matte white <b>STAL</b> - Aluminum <b>STB</b> - Matte black <b>STCF#</b> - Custom finish, specify RAL#	<b>SLS</b> - Sloped ceiling for stem <b>NA</b> - None
	<sup>3</sup> Minimum length is 6". Maximum length is 72". Stem is not field adjustable.			


# VIA 2 PENDANT




DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS

## Dimensions

### DIRECT/INDIRECT

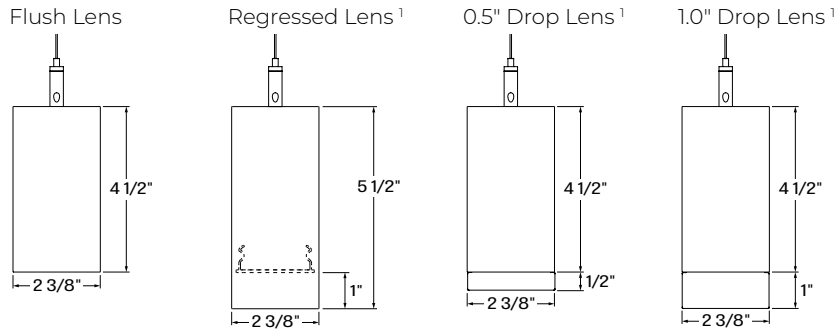

### DIRECT or INDIRECT

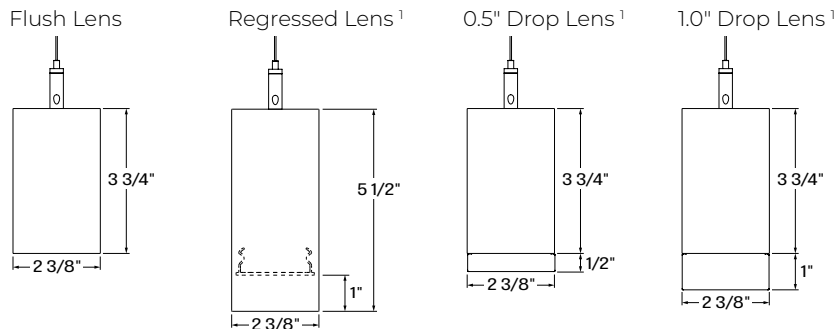

<sup>1</sup> Only available with HLO direct lens.

# VIA 2 PENDANT




DIRECT/INDIRECT, DIRECT, INDIRECT  
 STATIC WHITE, BIOS

## Photometrics

Values calculated based on a 4' fixture at 3500K for all optics.


### DIRECT OPTICS

HLO (Flush lens)




LM/FT	W/FT	LM/W
200	1.6	124
350	2.9	120
500	4.3	117
750	6.8	111
1000	9.4	106
1200	11.8	102

ARO2




LM/FT	W/FT	LM/W
200	1.7	119
350	3.0	116
500	4.4	113
750	7.0	107
1000	9.7	103
1200	12.1	99

WRO2




LM/FT	W/FT	LM/W
200	1.7	119
350	3.0	116
500	4.4	112
750	7.0	107
1000	9.8	102
1200	12.2	99

WDO




LM/FT	W/FT	LM/W
200	1.9	107
350	3.4	104
500	5.0	101
750	7.8	96
1000	11.0	91

LGO




LM/FT	W/FT	LM/W
200	2.1	94
350	3.8	91
500	5.7	88
750	9.1	83

MPO



LM/FT	W/FT	LM/W
200	1.8	111
350	3.2	108
500	4.7	106
750	7.3	102
1000	10.2	98

DDO



LM/FT	W/FT	LM/W
200	1.9	107
350	3.4	104
500	5.0	101
750	7.9	95
1000	10.9	92

### MULTIPLIER TABLES

Use these tables to get results for different color temperatures and lens positions for all photometric tables.

Multiplier - CCT/CRI

CCT	WATTS		LPW	
	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI
2700K	1.05		0.95	
3000K	1.02		0.98	
3500K	1.00		1.00	
4000K	1.00		1.00	
5000K	0.96		1.04	

Multiplier - Lens position

DIRECT LENS	WATTS	LPW
Flush lens	1.00	1.00
Regressed lens	0.99	1.00
Drop lens 0.5"	0.99	1.00
Drop lens 1.0"	0.95	1.05

### DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\frac{\left( \begin{matrix} \text{DIRECT} \\ \text{LM/FT} \end{matrix} + \begin{matrix} \text{INDIRECT} \\ \text{LM/FT} \end{matrix} \right)}{\left( \begin{matrix} \text{DIRECT} \\ \text{W/FT} \end{matrix} + \begin{matrix} \text{INDIRECT} \\ \text{W/FT} \end{matrix} \right)} = \text{LPW}$$

# VIA 2 PENDANT




DIRECT/INDIRECT, DIRECT, INDIRECT  
 STATIC WHITE, BIOS


## Photometrics

Values calculated based on a 4' fixture at 3500K for all optics.


### INDIRECT OPTICS


WIO2	LM/FT	W/FT	LM/W
	200	1.3	148
	350	2.4	145
	500	3.5	141
	750	5.5	136
	1000	7.7	130
	1200	9.5	126


WAI2	LM/FT	W/FT	LM/W
	200	1.4	142
	350	2.5	139
	500	3.7	135
	750	5.8	130
	1000	8.0	125
	1200	10.0	120

ARO2	LM/FT	W/FT	LM/W
	200	1.7	119
	350	3.0	116
	500	4.4	113
	750	7.0	107
	1000	9.7	103
	1200	12.1	99

TIO	LM/FT	W/FT	LM/W
	200	1.5	130
	350	2.7	127
	500	4.0	124
	750	6.3	119
	1000	8.8	114
	1200	10.9	110

HLO	LM/FT	W/FT	LM/W
	200	1.6	124
	350	2.9	120
	500	4.3	117
	750	6.8	111
	1000	9.4	106
	1200	11.8	102

### MULTIPLIER TABLE

Use the table to get results for different color temperatures for all photometric tables.

#### Multiplier - CCT/CRI

CCT	WATTS		LPW
	80+ CRI / 90+ CRI	80+ CRI / 90+ CRI	
2700K	1.05		0.95
3000K	1.02		0.98
3500K	1.00		1.00
4000K	1.00		1.00
5000K	0.96		1.04

### DIRECT/INDIRECT - LPW CALCULATION

For Direct/Indirect performance values, follow the formula.

$$\frac{\left( \frac{\text{DIRECT LM/FT}}{\text{W/FT}} + \frac{\text{INDIRECT LM/FT}}{\text{W/FT}} \right)}{\left( \frac{\text{DIRECT LM/FT}}{\text{W/FT}} + \frac{\text{INDIRECT LM/FT}}{\text{W/FT}} \right)} = \text{LPW}$$


# VIA 2 PENDANT



DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS

## DOT 1.5" MODULE

Values calculated based on 3500K.

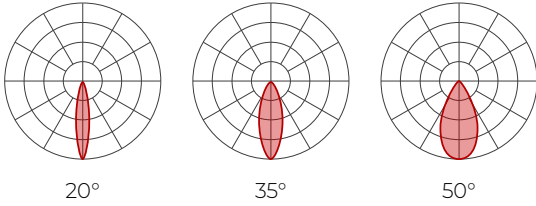

### Delivered lumens (LM)

WATTAGE	LUMEN PACKAGE
12.2 W	900
15.9 W	1120

### Efficacy (LM/W)


WATTAGE	EFFICACY
12.2 W	74
15.9 W	70

Please follow the multiplier table to ensure correct lumen value.

CCT	
2700K	0.94
3000K	0.96
3500K	1
4000K	1.02

## PETITE MODULE

Values calculated based on 3500K.



### Delivered lumens (LM)

Baffle finish	White		Black, Champagne, Dark bronze		Satin silver, Matte silver		Glow ring	
	35°	45°	35°	45°	35°	45°	35°	45°
6 W	420	472	386	407	417	449	379	382
10 W	645	726	593	626	642	691	583	588

### Efficacy (LM/W)

Baffle finish	White		Black, Champagne, Dark bronze		Satin silver, Matte silver		Glow ring	
	35°	45°	35°	45°	35°	45°	35°	45°
6 W	70	79	64	68	69	75	63	64
10 W	65	73	59	63	64	69	58	59

Please follow the multiplier table to ensure correct lumen value.

CCT	
2700K	0.94
3000K	0.98
3500K	1
4000K	1.05
5000K	1.05


# VIA 2 PENDANT



DIRECT/INDIRECT, DIRECT, INDIRECT  
 STATIC WHITE, BIOS

## BIOS

Three BIOS Circadian LED solutions are offered – Biological Static, Biological Dynamic, and Biological Tunable.  
 Use the decision tree below to identify when and where to use BIOS Wellness LED Lighting Solutions.

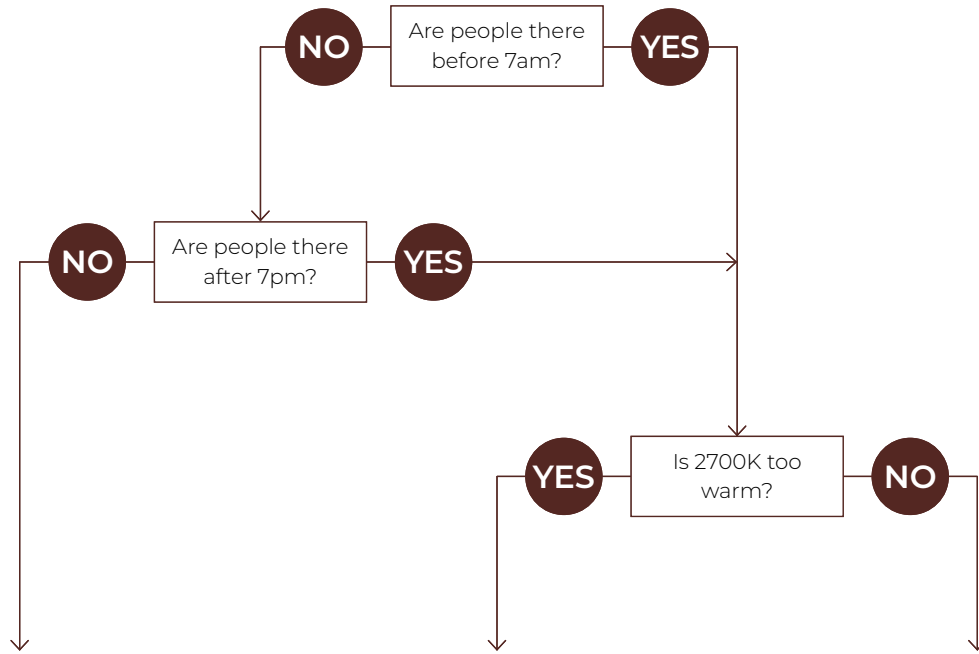

Biological Static BIOSST	Biological Dynamic BIOSDY	Biological Tunable BIOSTU
No CCT change when dimmed e.g. <b>40K</b> - 4000K stays as 4000K when dimmed	500K shift when dimmed e.g. <b>40K</b> - 4000K changes to 3500K when dimmed	Dims to 2700K e.g. <b>40K</b> - 4000K changes to 2700K when dimmed
Daytime solution	Daytime + evening solution	Daytime + evening solution
Spaces in operation during daytime hours, between 7am and 7pm	Spaces in operation overnight, after 7pm and before 7am, and when CCT color shift in the evening is not preferred	Suitable for spaces in operation overnight, after 7pm and before 7am, and where people do not sleep (CCT color shift in the evening is preferred)
E.g. offices, medical/dental offices	E.g. hospitals	E.g. offices, shiftwork

# VIA 2 PENDANT

DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS



## Technical Specifications

### DIRECT OPTICS

#### High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. Available with different lens position options, HLO has a spacing criterion of 1.06.

#### Asymmetric Refractive Optic (ARO2)

The Asymmetric Refractive Optic (ARO2) uses a sophisticated reflector combined with a matte beam-shaping film to create a smooth, effective downward light component without shadows or hot spots. It provides directional Gaussian light distribution with peak intensity at 20° above nadir and a 55° Full Width at Half Maximum (FWHM) beam angle. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

#### Wall Wash Refractive Optic (WRO2)

The Wall Wash Refractive Optic (WRO2) delivers smooth vertical illumination with a gentle gradient and soft visual cut-off. Its exacting configuration creates a strong downward light component without shadows or hot spots and provides light distribution with peak intensity at 21° above nadir. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.

#### Widespread Direct Optic (WDO)

The Widespread Direct Optic (WDO) is designed to distribute light far and wide. As such, it has an excellent luminous efficacy, a light span that is 40% farther than that of our traditional HLO, and it maximizes spacing distance while still creating a sense of uniformity. The lens snaps into place and utilizes nano prismatic optics to mask the diodes that are actually emitting the light.

#### Low-Glare Optic (LGO)

The Low-Glare Optic (LGO) is designed to cut off high-angled light and control glare. The carefully crafted lens refracts light downward through its center from which it then disperses into a wide conical distribution that negates any illumination at about 40°. The LGO provides the visual comfort of a louver in a smooth acrylic lens.

### Micro-Prismatic Optic (MPO)

The Micro-Prismatic Optic (MPO) delivers high-efficiency, low-glare illumination with UGR <17. Its precision-engineered lens, composed of thousands of tiny prisms, diffuses light to reduce glare, producing a ceiling plane that reads smooth from a distance while revealing subtle texture up close. The result is balanced, efficient illumination with a refined architectural presence.

### Domed Deglare Optic (DDO)

The Domed Deglare Optic (DDO) features a transparent, domed lens that delivers low-glare illumination and visual comfort with a refined textured presence on the ceiling plane.

### INDIRECT OPTICS

#### Widespread Indirect Optic (WIO2)

The Widespread Indirect Optic (WIO2) is a horizontal LED array with a widespread indirect micro prismatic optic that offers an impressive 160° spread. WIO2 creates an even illumination for smooth brightness on the ceiling that can achieve uniformity ratios of up to 2:1.

#### Uniformity [max/min]

Based on 18' continuous runs, in a 20' x 40' room, 10' wall height

Mounting height from ceiling	Spacing (Center to center)		
	8'	10'	12'
12"	5.5	10.0	9.0
18"	3.5	6.0	6.0
24"	2.5	4.0	4.5

#### Translucent Indirect Optic (TIO)

The Translucent Indirect Optic (TIO) is composed of a horizontal LED array that has a translucent lens to mask pixilation from the diodes. TIO has a 100° spread in the indirect that is ideal when the fixture is mounted farther away from the ceiling.

#### Widespread Asymmetric Indirect Optic (WAI2)

The Widespread Asymmetric Indirect Optic (WAI2) offers an upward grazing effect with a 45° forward throw. It softly highlights the ceiling in the up-light while distributing the required illumination of the rest of an interior space. For avoiding glare and enjoying visual comfort, WAI2 is an ideal solution.

#### High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) uses matte white reflectors to distribute LED output across 0.075" acrylic shielding, providing up to 88% transmission and good obscuration. HLO has a spacing criterion of 1.06.

# VIA 2 PENDANT



DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS

## Asymmetric Refractive Optic (ARO2)

The Asymmetric Refractive Optic (ARO2) uses a sophisticated reflector combined with a matte beam-shaping film to create a smooth, effective downward light component without shadows or hot spots. It provides directional Gaussian light distribution with peak intensity at 20° above nadir and a 55° Full Width at Half Maximum (FWHM) beam angle. Microstructure material applied to the snap-in lens provides the precise refractive power and visual comfort, while achieving a high luminous efficacy.


## LIGHT SOURCE

### Static white

Custom linear array of mid-flux LEDs are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

## BIOS

BIOS SkyBlue™ Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being. The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (490 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.

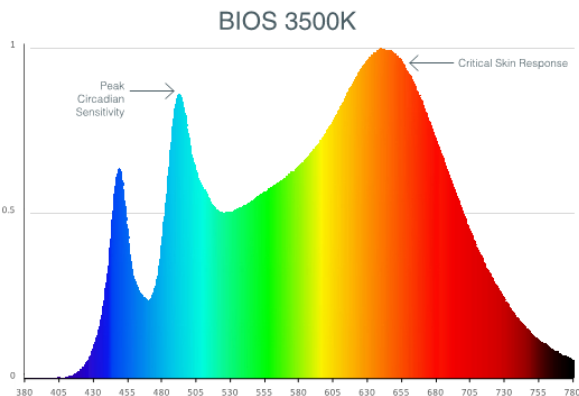

Three BIOS solutions are offered: BIOS Biological Static (BIOSST), BIOS Biological Dynamic (BIOSDY), and BIOS Biological Tunable (BIOSTU). See page 8 for details.

## LUMINAIRE LENGTH

Via 2 is available in standard lengths of 2' to 12' ( up to 8' for MPO and DDO). Continuous runs are available for run lengths over 12' (8' for MPO and DDO). Exact run length must be noted in the product code. The minimum length is 2' for Direct or Indirect fixtures, and 3' for Direct/Indirect fixtures. Lengths can be ordered in 1' and/or 1" increments, and 2' increments for BIOSTU and BIOSDY. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

## ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% EcoDrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant. ELV and TRIAC dimming performance (including minimum dimming percentage) subject to dimmer selection.

## PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

## ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

## Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.

Code: 2MC-2EC96

Example 2: A 16' Direct/Indirect fixture with separate circuits for direct and indirect, and with one 4' night light section on the direct side on a third circuit.

Code: 3MC-1NL48

# VIA 2 PENDANT



DIRECT/INDIRECT, DIRECT, INDIRECT  
STATIC WHITE, BIOS

Example 3: A 24' Direct fixture with one 4' generator transfer device section.

Code: 1MC-1GTD48

## Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

## MOUNTING

Pendant fixtures can be mounted either with aircraft cable or with stem. See page 3 for details.

## FINISH

**Interior:** 95% reflective matte powder coated white paint

**Exterior:** Matte white, matte black, or aluminum powder coating. Custom finishes are also available.

## CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



## Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Three types are available:

**OMS:** An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

**ODS:** An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

**OCS:** Both an occupancy and a daylight sensor are installed in the luminaire.

## Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.


Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.


Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

## INTEGRATED TRACK

The integrated track is available with single units and continuous runs, with or without sections of integrated LED.



GES



TEK / HTEK / XTS / XTSC


# VIA 2 PENDANT



DIRECT/INDIRECT, DIRECT, INDIRECT  
 STATIC WHITE, BIOS

## DOT MODULE

Dot is a round spotlight that rotates 360° and tilts 90°, available in three beam angles of 20°, 35°, and 50°. LED light source CCT options are 2700K, 3000K, 3500K, and 4000K available in either 80+ CRI or 90+ CRI. Offered in 4" height with two baffle options: standard and decorative. Dot is available in a white, black, or custom finish.

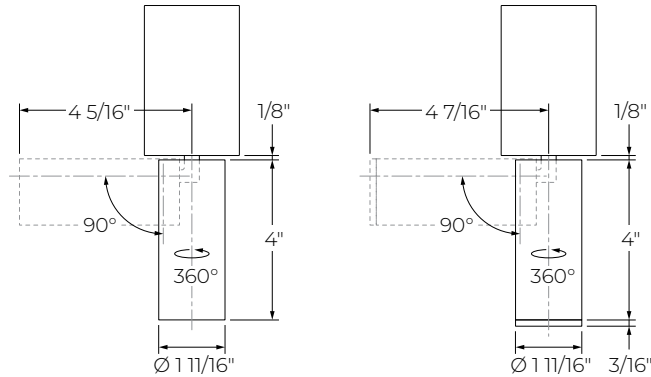


Dot 1.5" - Standard baffle

Dot 1.5" - Decorative baffle

## PETITE MODULE

Petite 1" Downlight is offered in two options: trimless and glow ring. It is available in two beam angles of 35° and 45°. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K available in either 80+ CRI or 90+ CRI. The trimless model is available in a wide range of colors.

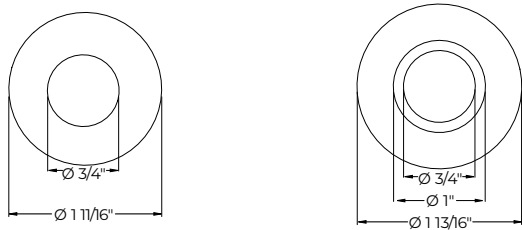

Petite  
(PETI)

Petite with glow ring  
(PETIGLR)

## CONSTRUCTION

- Housing:** Extruded aluminum, up to 90% recycled content
- Interior brackets:** Die-formed cold rolled sheet steel
- Joining system:** Die-cast zinc
- Reflectors:** Die-formed cold rolled steel, 95% reflective matte white painted
- Lens:** Acrylic
- Drop lens:** Extruded with glued end caps
- End caps:** Die-cast aluminum
- Hanger:** Chromed griplock securely attached in end caps and/or joiners with stainless steel hardware
- Aircraft cable suspension:** Ø 1/16" stainless steel aircraft cable
- Stem:** Ø 1/2" threaded steel tube

## WEIGHT

Direct/Indirect	Direct or Indirect
<b>4":</b> 10.68 lbs - 4.85 kg	<b>4":</b> 9.03 lbs - 4.1 kg
<b>8":</b> 22.03 lbs - 10 kg	<b>8":</b> 18.28 lbs - 8.3 kg
<b>12":</b> 32.60 lbs - 14.8 kg	<b>12":</b> 27.97 lbs - 12.7 kg

## CERTIFICATIONS

- ETL:** Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.
- Declare:** [LBC Red List Approved](#)

## WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.