


Voilà

4" Square Downlight
Fixed/Adjustable




Project: _____

Type: _____

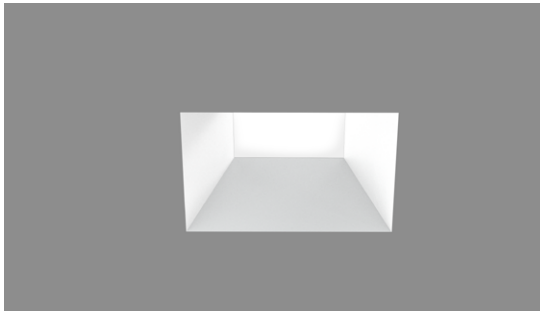

Trimless

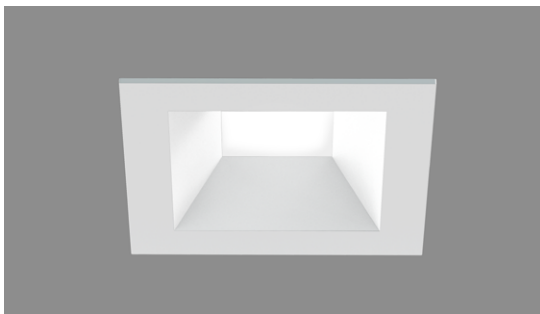

Trim

Voila 4" square downlights feature innovative Hyflex™ optics for precise beam control. Shallow construction requires only 4" recess depth. Driver can be replaced through 2" aperture. The Voila COB source with 90+ CRI and 2-step color consistency matches other Lumenwerx luminaires, and is available with Chromawerx SOLA (dim-to-warm) and DUO (tunable white), as well as emergency option. Complete Voila offering includes 2" and 4" apertures; downlights, adjustables, and wall washers; round and square trim; and cylinders; see separate specifications.

Performance

LUMEN OUTPUT ¹	WATTS	EFFICACY LM/W
1336 lm	14 W	95 lm/W
1813 lm	20 W	91 lm/W
2442 lm	28 W	87 lm/W

¹ Lumens packages are assuming 3500K, 80+ CRI, 30° beam, square white baffle

Delivered Lumens for Round White Standard Baffles at 3500K

BEAM	CRI 90+ CRI							
	10	20	30	40	50	60	75	90
Low - 13.8 W	1257	1203	1410	1424	1379	1363	1333	1302
Medium - 19.7 W	1576	1508	1912	1933	1871	1849	1808	1766
High - 28 W	1932	1848	2576	2604	2520	2492	2436	2380



Some restrictions may apply.

Aperture Size

3.55"

Configurations



Fixed, adjustable & wall wash (see other spec sheets for all the configurations)

Baffle Depth



Standard 1.00"

Trim



Trim & Trimless

Baffle & Trim Flange Finishes

- Textured matte white
- Textured matte black
- Mixed black & white
- Custom RAL

Color Temperature

- 2700K
- 3000K
- 3500K
- 4000K
- SOLA
- DUO

Delivered 1152-2492 lm
14-28 Watts, up to 99 lm/W

Integral Drivers

0-10V, TRIAC, ELV, eldoLED & Lutron

Remote Drivers

Lutron, eldoLED and other drivers

Emergency battery pack

1 - Housing (Example: VO4SR-TRM-SW-OF-ASB-120-14W-D1)

Product Specification

LUMINAIRE ID	TRIM STYLE	LIGHT SOURCE	INSTALLATION TYPE	MOUNTING OPTION	VOLTAGE	WATTAGE (80+ CRI) ³	DIMMING		
VO4SR									
VO4SR - Voila 4" Square Recessed	TRM - Flanged trim TLMP - Trimless drywall mudplate TLMW - Trimless millwork	SW - Static white SOLA - Dim-to-warm DUO - Tunable white	OF - Open frame type non-IC IC ¹ - IC rated CP ¹ - Chicago Plenum type-IC (CCEA) ¹ IC/CP with low output only.	ASB - Adjustable standard bar hangers (grid and drywall) FMB - Flush mount bars (drywall only) ACB - Adjustable commercial bar hangers (grid and drywall) AHC - Adjustable hat channel bars NA - No bar hangers	120 - 120V 277 - 277V UNV - 120V-277V 347 ² - 347V ² Available with 0-10V dimming options D1, RD1 and RSD1 only. Consult factory for details.	14W - Low output 1152-1363 lm 20W ⁴ - Medium output 1444-1849 lm 28W ⁴ - High output 1769-2492 lm For other lumen packages, please consult factory. SOLA 13W - Low output 920 lm (20° only) 25W ⁴ - High output 1800-1981 lm (40° and up) DUO 10W - Low output 700 lm (20° only) 20W ⁴ - High output 1100-1200 lm (40° and up) ³ For delivered lumens and other CRI, see multiplier tables on page 3. ⁴ Available with OF housing only.	INTEGRAL D1 - 1% 0-10V ELV ⁵ - ELV 120V TRI ⁵ - TRIAC 120V LDEI ^{6,7} - Lutron Hi-lume 1% Eco DA ^{6,7} - DALI ELDO ⁶ - eldoLED 0.1% ELDI ⁶ - eldoLED 1% DEB ⁸ - 0-10V with onboard emergency battery backup SOLA SDI - Single 0-10V input DUO DMX ⁷ - To specify, see pages 7 to 9 DDA ⁷ - DALI DT6 DDA8 ⁷ - DALI DT8 DDI - Dual 0-10V input for CCT/intensity LD2 ^{7,8} - Lutron DALI-2 digital ⁵ Available with 120V only. ⁶ Not available with CP installation type. ⁷ On-site commissioning is required. ⁸ Available with OF housing only.	REMOTE RD1 - 1% 0-10V RELV ⁹ - ELV 120V RTRI ⁹ - TRIAC 120V RLDEI ¹⁰ - Lutron Hi-lume 1% Eco RDA ¹⁰ - DALI RELD0 - eldoLED 0.1% RELD1 - eldoLED 1% SOLA RSD1 - Single 0-10V input DUO RDMX ¹⁰ - To specify, see pages 7 to 9 RDDA ¹⁰ - DALI DT6 RDDA8 ¹⁰ - DALI DT8 RDDI - Dual 0-10V input for CCT/intensity RLD2 ¹⁰ - Lutron DALI-2 digital ⁹ Available with 120V only. ¹⁰ On-site commissioning is required.	+EB ¹¹ - Emergency battery ¹¹ Specify with remote dimming only. The code will be like the following example: RD1+EB.

2 - Light (Example: VO4-SW-10-2-90-27-LS)

LUMINAIRE ID	LIGHT SOURCE	BEAM	COLOR QUALITY	CRI	COLOR TEMP.	OPTION
VO4						
VO4 - Voila 4"	SW - Static white SOLA - Dim-to-warm DUO - Tunable white	10 - 10° Narrow spot 20 - 20° Spot 30 - 30° Narrow flood 40 - 40° Flood 50 - 50° Wide flood 60 - 60° Very wide flood 75 - 75° Very wide flood 90 - 90° Open flood	SOLA/DUO 20 ¹² - 20° Spot 40 ¹³ - 40° Flood 50 ¹³ - 50° Wide flood 60 ¹³ - 60° Very wide flood 75 ¹³ - 75° Very wide flood 90 ¹³ - 90° Open flood ¹² Available with low output only. ¹³ Available with high output only.	2 - 2 Step MacAdam Ellipse 3 - 3 Step MacAdam Ellipse	80 - 80+ CRI 90 - 90+ CRI 95 - 95+ CRI 90 - 90+ CRI (SOLA and DUO)	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K SOLA - Dim-to-warm 35K-22K DUO - Tunable white 65K-27K ¹⁴ Hex louver & linear spread cannot be combined together. ¹⁵ Not available with 60°/75°/90° beam options.




3 - Baffle (Example: VO4SRB-TRM-SDL-SR-TMW-TMW)

LUMINAIRE ID	TRIM STYLE ¹⁶	LENS ¹⁶	BAFFLE POSITION	BAFFLE FINISH ¹⁶	TRIM FLANGE FINISH ¹⁶
VO4SRB			SR		
VO4SRB - Voila 4" Square Recessed Baffle	TRM - Flanged trim TLMP - Trimless drywall mudplate TLMW - Trimless millwork	SDL - Soft diffused lens FDL - Frosted diffused lens NOL - No lens	SR - Standard regress	TMW - Textured matte white TMB - Textured matte black CF# - Custom finish, specify RAL# (e.g. CF1028)	TMW ¹⁷ - Textured matte white TMB ¹⁷ - Textured matte black CF# ¹⁷ - Custom finish, specify RAL# (e.g. CF1028) NA - None ¹⁷ Applicable for TRM only.

¹⁶IP44 rated for bathrooms, showers, outdoor canopies and marquees when specified with lens options (**SDL**, **FDL**), trim option (**TRM**), and the same finish for both the baffle and trim.

Photometrics

Please follow the multiplier tables to ensure correct lumen value. Beams, baffle color, lensing, CCT, CRI, baffle shape and accessories will change the lumen value.

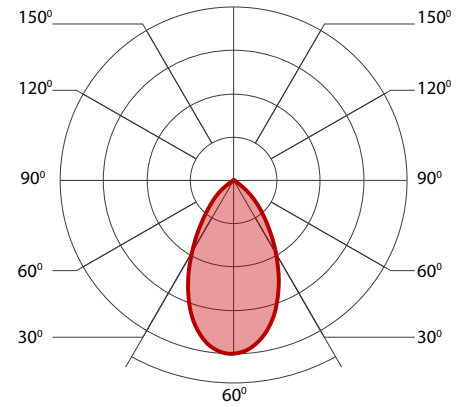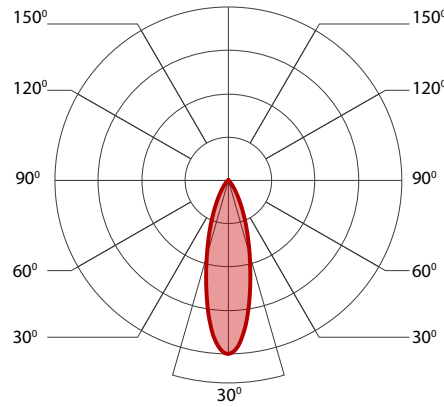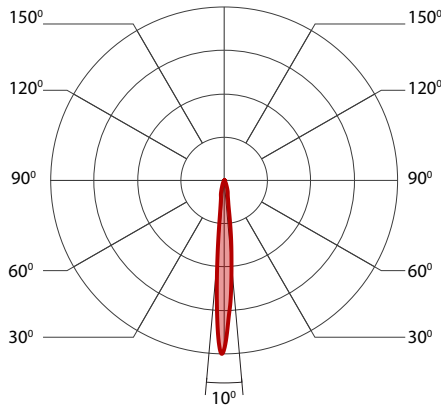

Delivered Lumens for Round White Standard Baffles at 3500K

BEAM	80+ CRI								90+ CRI							
	10	20	30	40	50	60	75	90	10	20	30	40	50	60	75	90
Low - 13.8 W	1348	1294	1501	1532	1475	1455	1424	1394	1257	1203	1410	1424	1379	1363	1333	1302
Medium - 19.7 W	1692	1623	2037	2078	1995	1975	1933	1892	1576	1508	1912	1933	1871	1849	1808	1766
High - 28 W	2072	1988	2744	2800	2688	2660	2604	2548	1932	1848	2576	2604	2520	2492	2436	2380

Delivered Lumens - At 3000K

95+ CRI								
10	20	30	40	50	60	75	90	
1080	1053	1213	1225	1186	1172	1146	1120	
1355	1297	1644	1663	1609	1590	1555	1519	
1820	1736	2212	2122	2156	2128	2100	2044	

Efficacy Based on Delivered Lumens - High 28 W

BEAM	LPW							
	10	20	30	40	50	60	75	90
80+ CRI	74	71	98	100	96	95	93	91
90+ CRI	69	66	92	93	90	89	87	85
95+ CRI	65	62	79	79	77	76	75	73

SOLA and DUO Max Wattage

BEAM	90+ CRI							
	10	20	30	40	50	60	75	90
DUO	NA	10	NA	19	19	19	19	19
SOLA	NA	13	NA	26	26	26	26	26

Multiplier - CCT

CCT	
2700K	0.9
3000K	0.95
3500K	1
4000K	1.05

Multiplier - Baffle Color and Shape

BAFFLE VARIABLES		
White	Round standard	1
White	Square standard	0.89
Black	Round standard	0.95
Black	Square standard	0.87

Multiplier - Optical Options

LENS AND LOUVERS	
No lens	1
Soft diffused lens	0.94
Frosted lens	0.78
Linear spread	0.9
Hex louvers	0.82

For SOLA and DUO, please consult factory.

Technical Specification

DESCRIPTION Compact fixed or adjustable 4" downlight with multiple output, color, beam, and dimming options.

HOUSING CONSTRUCTION For new construction, 20 gauge powder coated steel. Open frame, type-IC, or Chicago Plenum (CCEA) rated. 18 gauge galvanized steel junction box with 1/2" trade size knockouts. Adjustable standard, flush mount, adjustable commercial, and adjustable hat channel bar hangers are available as mounting options.

Clearance Height: Open frame/Type-IC/Chicago Plenum: 4";
Open frame with DEB or LS2 (DUO) options: 8"

Ceiling Thickness: Can accommodate 1/2" to 1"

Housing weight: Type-IC/Chicago Plenum - 8 lbs - 3.6 kg;

Open Frame - 6 lbs - 2.7 kg

Ceiling cut out: 4 21/32" x 4 21/32"

LIGHT ELEMENT

Adjustability: Hot aiming, lockable, 360° rotation and 30° vertical tilt with shift to ensure beam stays centered.

LED Module: Integral COB module. 90+ CRI and 2 SDCM, Standard with options of 80+ CRI, or 95+ CRI. L80 > 60,000 hours

Light Output: From 1152-2492 lumens

HyFlex™ Optics: Proprietary TIR/reflector with field interchangeable beam smoothing lenses.

Optical Accessories: Linear spread lens and hex cell louver can accommodate up to two in the light element.

Thermal Management: Cold-forged aluminum heat sink to maximize thermal dissipation.

BAFFLE

Round and square, die-cast aluminum retained with rare earth magnets. **Trim style options:** Round and square with flanged trim, trimless with mudplate for drywall, or trimless for millwork.

CHROMAWERX SOLA (dim-to-warm) and DUO (tunable white). See page 6 for more information.

ELECTRICAL

Integral: 0-10V, ELV, TRIAC, Lutron Hi-Lume EcoSystem, DALI, eldoLED 0.1%, eldoLED 1%, DMX, Lutron DALI-2 digital

Remote: 0-10V, ELV, TRIAC, Lutron Hi-Lume EcoSystem, DALI, eldoLED 0.1%, eldoLED 1%, DMX, Lutron DALI-2 digital

Emergency Options: Emergency battery back-up options are available as integral (Fulham), or remote (Fulham, Bodine, or IOTA). The battery provides 10 W of power.


ENVIRONMENT Ambient temperature at fixture location shall be within 0°C/32°F - 25°C/77°F, indoor dry or damp as well as outdoor damp use (canopies or marquees).

LISTING cETLus listed to UL 1598 and CAN/CSA Standard C22.2 No. 250.0. IP44 rated for bathrooms, showers, outdoor canopies, and marquees when specified with lens options (SDL, FDL), trim option (TRM), and the same finish for both the baffle and trim.


WARRANTY 5 year limited warranty on LED module and power supply. Guaranteed to maintain 70% lumen maintenance.

Installation Types


Open Frame

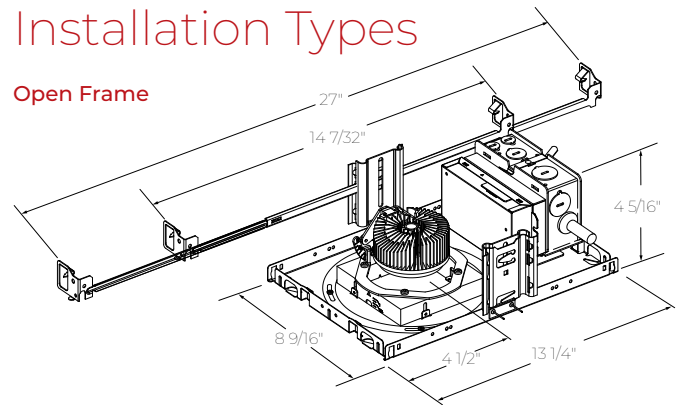


Type-IC / Chicago Plenum

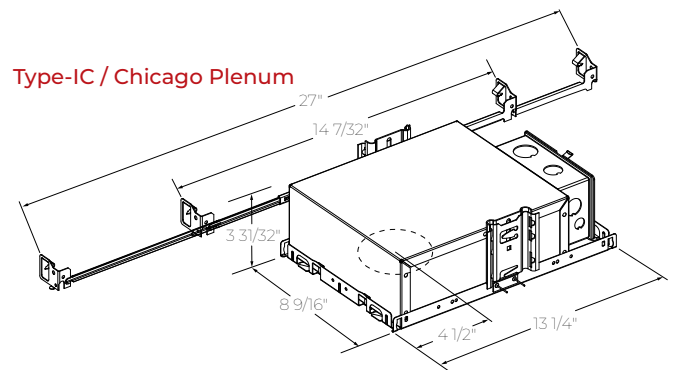


Mounting Options




ASB - Adjustable Standard Bar Hangers



FMB - Flush Mount Bars



ACB - Adjustable Commercial Bar Hangers



AHC - Adjustable Hat Channel Bars

Voilà


4" Square Downlight
Fixed/Adjustable



Project: _____

Type: _____


Light

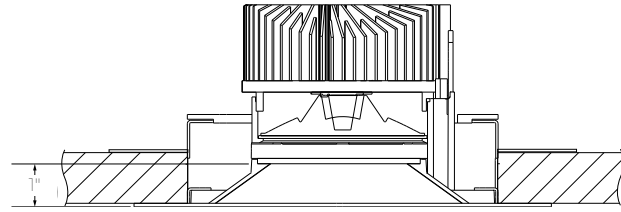

Standard Baffle


Adjustment Mechanism

Flexible Trim Collar




Light Element

Heat Sink
LED Module
Hyflex™ Optics




Optical Accessories (Optional)

Linear Spread
Hex Louver




Retaining Ring

Magnetic Snap




Baffle & Lens

Standard Regress
Soft Diffused
Frosted Diffused




Trim

Trim and Trimless



Optics

Hyflex™ optics provide precise optical control in a remarkably compact form. The core of this four-tier system is a compound reflector with a central TIR element, just 1.06" deep. Beam smoothing discs perfect beam angles up to 90°. Beam angles are easily interchanged in the field.




Adjustability

Adjustable Light Element rotates 360° and tilts up to 30°. Screw thread mechanism provides easy tilt adjustment, fixes the aiming angle, and is accessed by removing aperture trim (see below). Supporting collar allows ceilings from 1/2" to 1" thick.

Light Source - LED

Compact COB (Chip-On-Board) LED module, available in 2700K, 3000K, 3500K and 4000K with a choice of 80+ CRI or 90+ CRI with elevated R9 value (for 95+ CRI, consult factory). Color consistency is maintained to within 2 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

Beam Angles

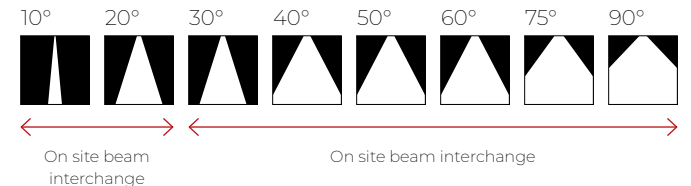

Options



Voilà

4" Square Downlight
Fixed/Adjustable



Project: _____

Type: _____

Integral Driver

Unless otherwise specified, Voilà comes standard with an integral, 120-277 VAC/60Hz, electronic, 1% 0-10V dimming, constant-current LED driver. The driver is field replaceable and features a high power factor, low THD and sources 1 mA on the 0-10V dim line. All integral drivers are located inside the housing and are easily accessible from below the ceiling through the aperture. All dimming drivers comply with IEEE C62.41 surge protection requirements.

Emergency Integral


Factory installed, long-life, high-temperature, LED driver with integrated emergency backup using a recyclable LiFePO4 battery pack. Features a remote test switch with charge indicator, minimum of 90 minutes operation and 10 W per downlight emergency lighting output. Recharge time of 12 hours.

Emergency Remote


Long-life, high-temperature, emergency LED driver with Lithium Ion battery pack. Features a test switch with charge indicator, minimum of 90 minutes operation and 10 W per downlight emergency lighting output. Recharge time of 24 hours.

Trim Dimensions

Trimless (TLMP, TLMW)



Trim (TRM)

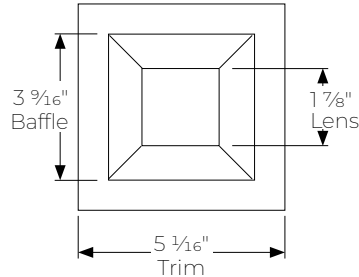

Chromawerx SOLA is single-channel control that dims output while warming the color temperature in a pre-determined relationship. A simple analog control adjusts a specially populated LED array to emulate the effect of dimming a filament source.




Chromawerx DUO offers a two-channel control system which uses analog or digital protocols for synchronous control of both cool (6500K) to warm (2700K) LED arrays - maintaining a CRI above 90. The range of color DUO offers is useful for entraining circadian rhythms, stimulating alertness, and compensating for jet lag among other applications. The Chromawerx drivers are programmed to limit maximum light output and power usage across all color temperatures. When paired with DALI drivers (DDA/DDA8), color tuning follows a linear dimming curve.

Baffle



Standard Regress

Trimless (TLMP, TLMW)




Black Baffle




White Baffle


Trim (TRM)




White Baffle,
Black Trim



Black Baffle,
White Trim




Black Baffle,
Black Trim



White Baffle,
White Trim

DUO GENERIC DMX NETWORK ARCHITECTURE


A qualified DMX integrator is required to assure proper installation and commissioning of the DMX network. **When placing the PO, please provide the contact information of your DMX integrator.**

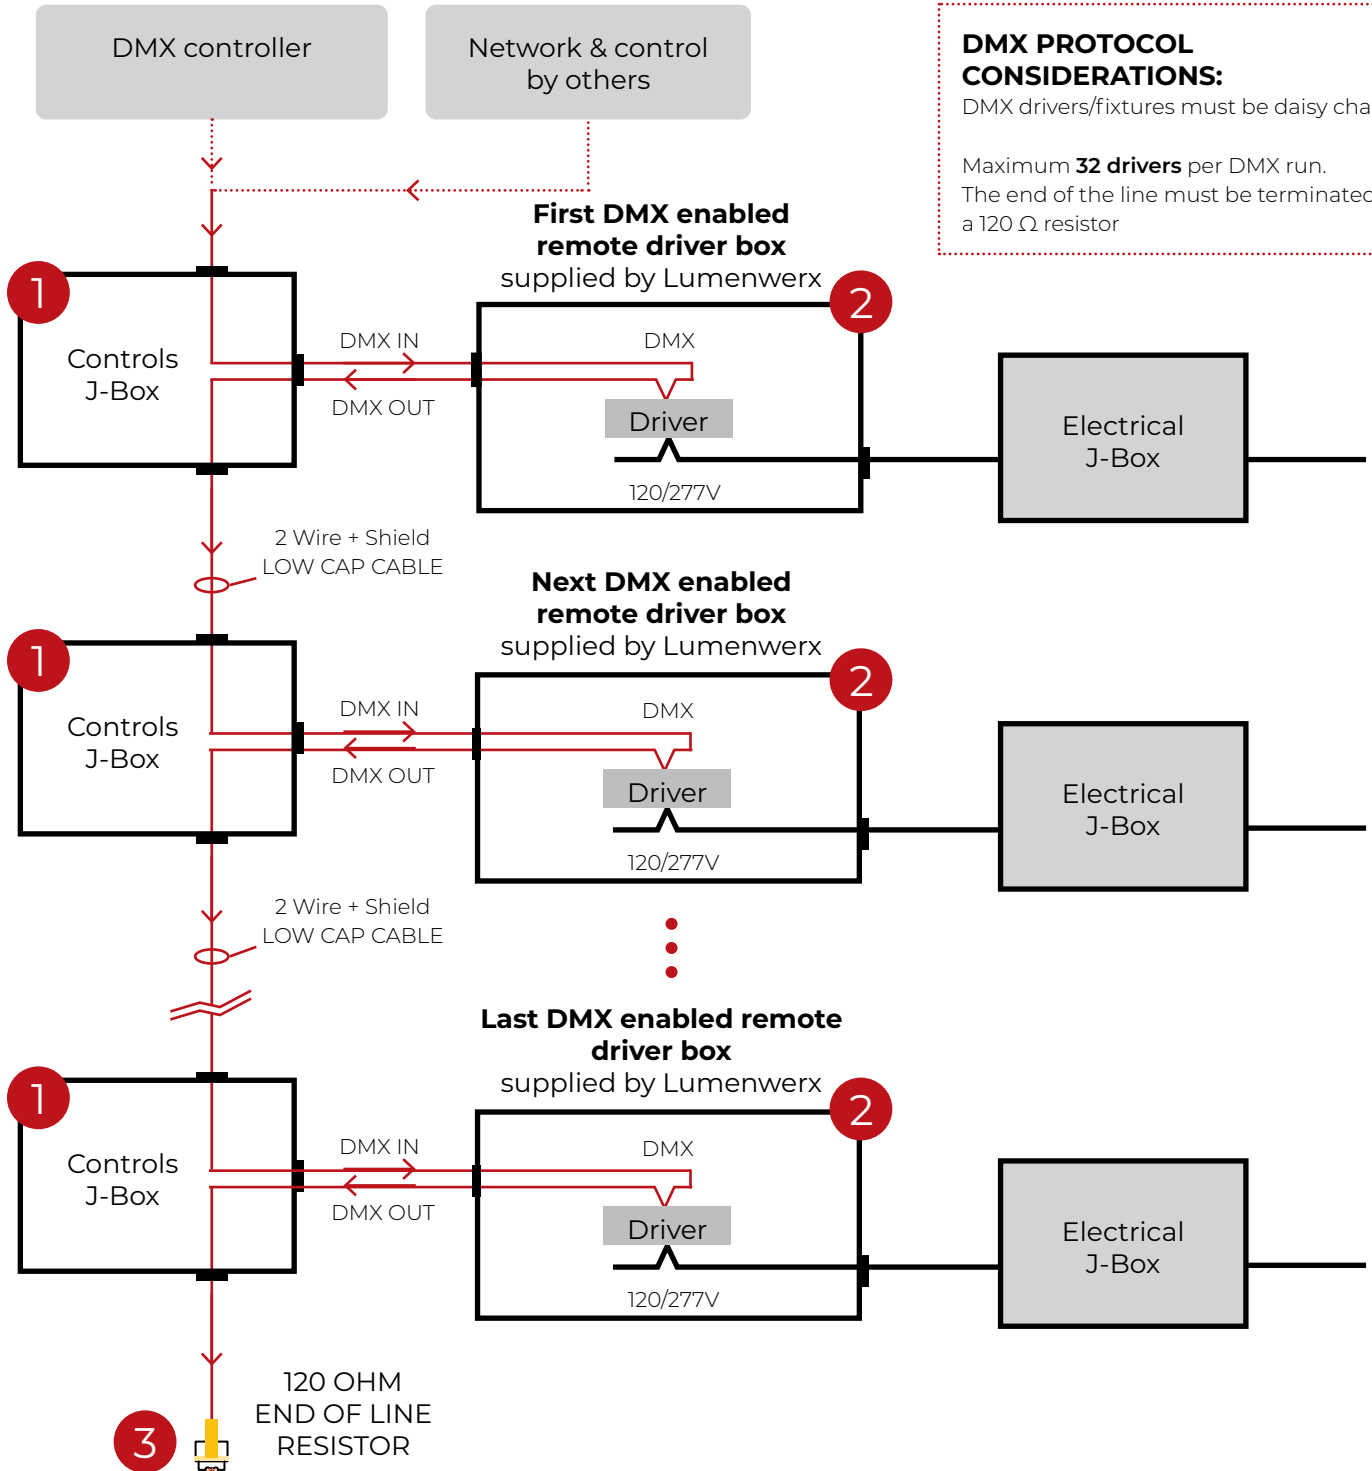


DMX PROTOCOL CONSIDERATIONS:
DMX drivers/fixtures must be daisy chained.

Maximum **32 drivers** per DMX run.
The end of the line must be terminated by a 120 Ω resistor

1 J-BOX DMX DAISY CHAIN DETAIL

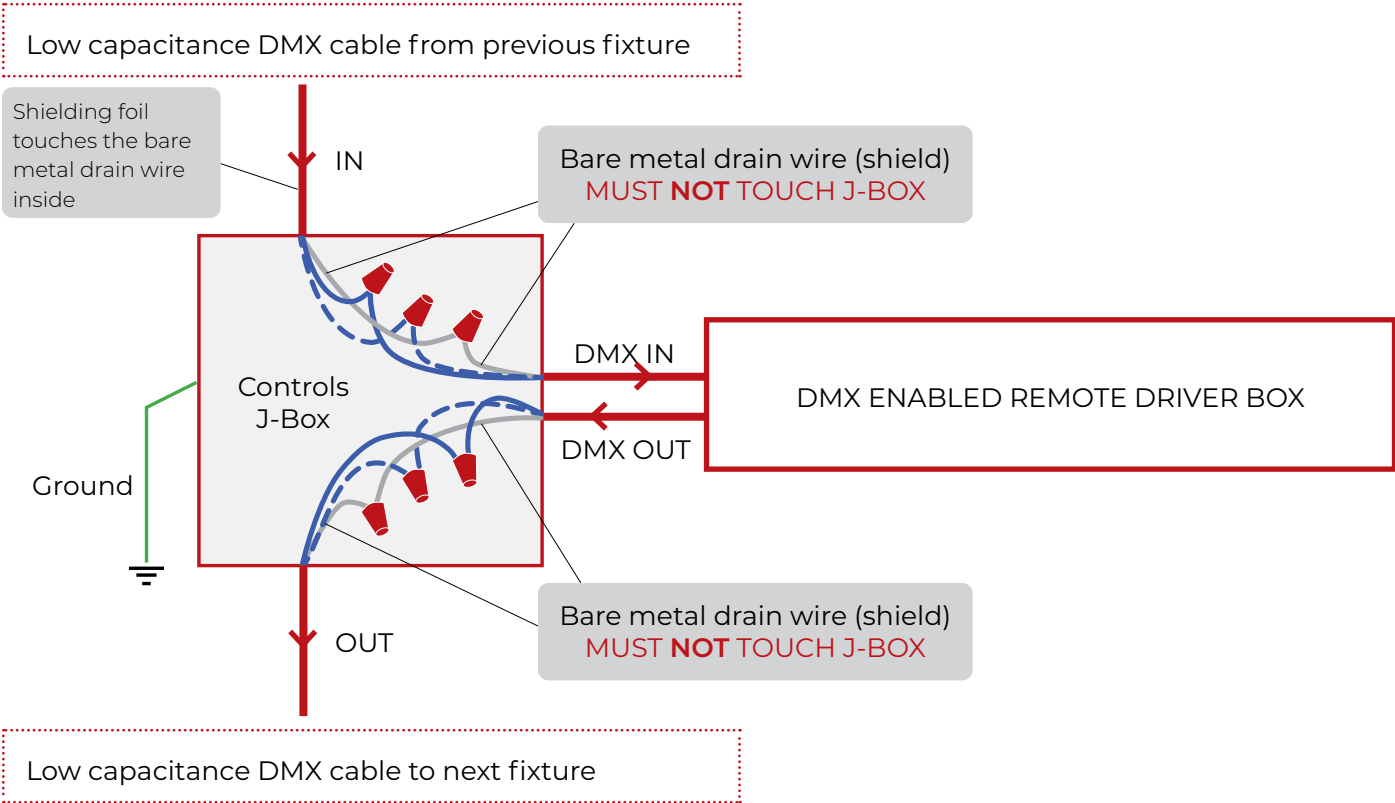

2 DMX CONNECTION REMOTE DRIVER

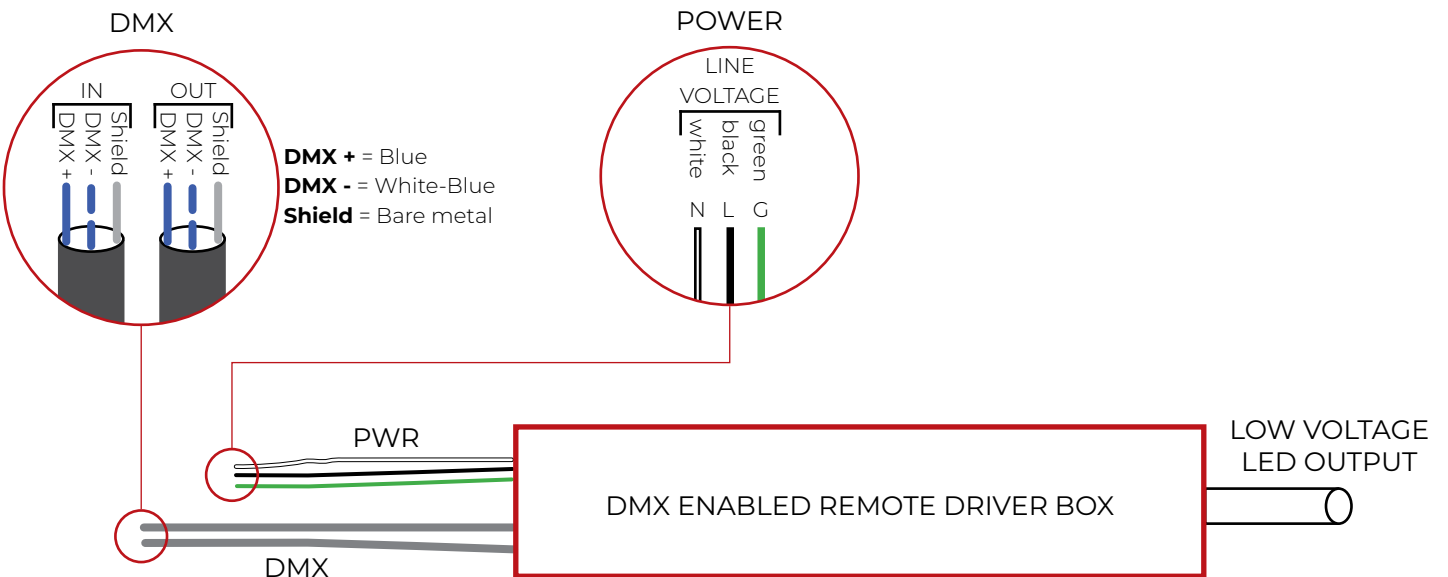

3 LAST DMX CONNECTION DETAIL

