




## LEVELED CORNERS

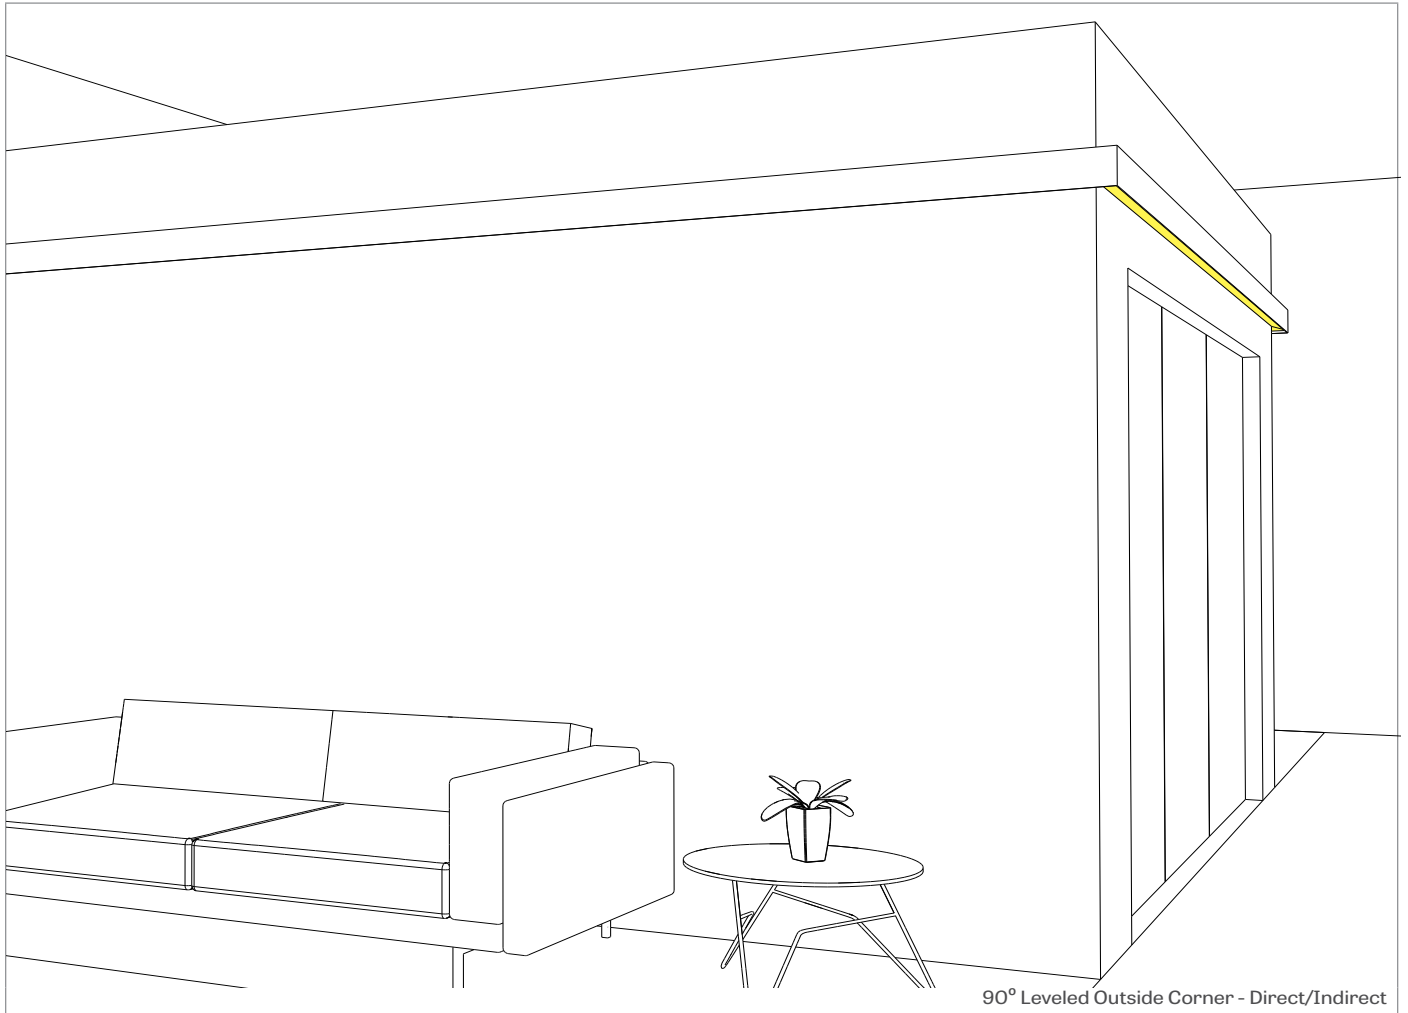


### HOW TO SPECIFY A PATTERN?


Please follow these steps when specifying in order to be as precise as possible.

- (1) We require a drawing illustrating the pattern you are trying to achieve - anything from a simple line drawing to elaborate architectural drawings will suffice.
- (2) Under **PATTERN LENGTH**, enter the overall length of your pattern - either in feet or inches.
- (3) Under **CORNER TYPE**, please enter LEVI for level inside corners, or LEVO for level outside corners.
- (4) Under **CORNER DEGREE**, please enter the angle in degrees of each corner required to complete your pattern, followed by the number of corners.

PATTERN LENGTH	CORNER TYPE	CORNERS DEGREE
<b>#FT</b> - nominal length in feet	<b>LEVI</b> - Level inside corner	<b>90(#)</b> - 90 degrees, specify number of corners (#)
<b>#IN</b> - length in inches	<b>LEVO</b> - Level outside corner	<b>#(°)</b> - Other degrees, specify the angle degree #, followed by the number of corners (#)
Continuous Run - for luminaires over 12'		

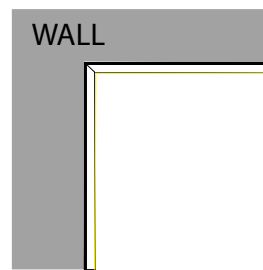

LEVI - Level inside corner

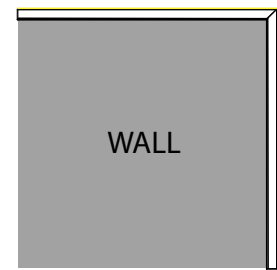

LEVO - Level outside corner

### OPTIC

**HIGH EFFICIENCY LAMBERTIAN OPTIC (HLO)** - matte white side reflectors combined with High-Efficiency Lambertian Optic (HLO) shielding of diffusing 0.075" thick acrylic with up to 88% transmission and good source obscuration. Luminaire brightness is controlled by the flux-to-shielding area ratio.

### LIGHT SOURCE - LED

Custom linear array of mid-flux LED's are cartridge-mounted with quick-connect wiring to facilitate service and thermal management. Available in 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.


All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

### PERFORMANCE PER 4' AT 4000K

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	4000K	15.5	2000	127
medium output	4000K	21.5	2800	129
high output	4000K	31	4000	130

### PATTERN LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

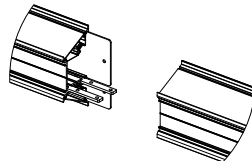

joining system for Walo Direct/Indirect

### ELECTRICAL


Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

### EMERGRNCY

Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation, up to 1000 lumens per 4ft (25°C) emergency lighting output. Recharge time of 24 hours.

### MOUNTING OPTIONS

Fixtures may be horizontally or vertically mounted to the wall using a bracket. For long runs, a minimum of 6" from adjacent walls is required.



Wall bracket

### CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



### Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

One type is available:

**OSS:** An integral stairwell occupancy sensor uses ultrasonic sensing technology to turn light on when movement is detected. The sensor, located in the middle of the fixture, transmits sound waves in the stairwell. When motion is detected in the space, the luminaire turns on to full brightness. When the space is unoccupied, light levels are dimmed to 50%. Please consult factory for other sensor locations on the luminaire, as well as for other minimum light level options.

## Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used. Consult factory for integrating connected controls in a wall fixture.

## FINISH

**Interior** - 95%, reflective matte powder coated white paint

**Exterior** - matte white or aluminum powder coating.

Custom finishes are also available.

## CONSTRUCTION

**Housing** - Extruded Aluminum (0.07" nominal) up to 90% Recycled Content

**Interior brackets** - Die formed cold rolled sheet steel 16 gauge thick

**Joining system** - Cold rolled steel

**Reflectors** - Cold rolled steel 0.024" thick precisely die formed, 95% reflective matte white painted

**End caps** - Aluminum plate 0.125" thickness

## WEIGHT

**WALO 4ft** - 7.63lbs - 3.46kg

**WALO 8ft** - 13.78lbs - 6.25kg

**WALO 12ft** - 21lbs - 9.53kg


## CERTIFICATION

**ETL** - Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

## WARRANTY

LumenWerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. LumenWerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.


## 500 LUMEN AT 80CRI - LOW OUTPUT

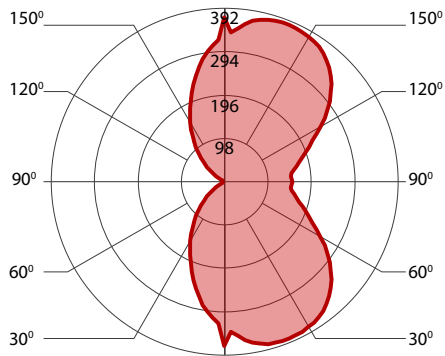

### PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
low output	2700K	17	2000	117
low output	3000K	16.5	2000	121
low output	3500K	16.5	2000	123
low output	4000K	15.5	2000	127


## 700 LUMEN AT 80CRI - MEDIUM OUTPUT

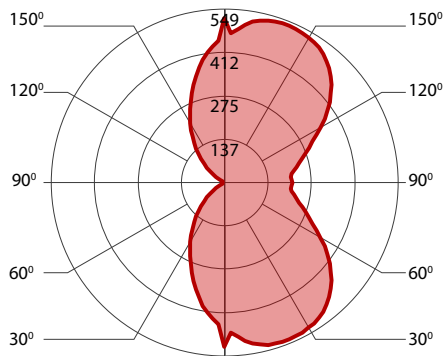

### PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
medium output	2700K	23.5	2800	119
medium output	3000K	23	2800	123
medium output	3500K	22.5	2800	125
medium output	4000K	21.5	2800	129

## 1000 LUMEN AT 80CRI - HIGH OUTPUT

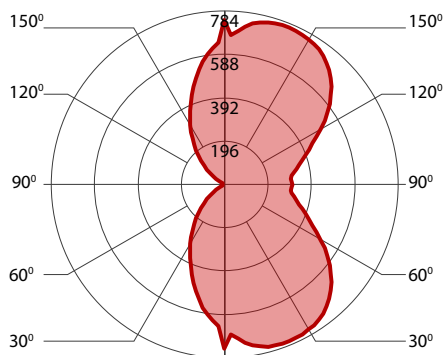

### PERFORMANCE

LED output	Color Temp	Watts	Nominal Delivered Lumens	Efficacy LPW
high output	2700K	33.5	4000	120
high output	3000K	32.5	4000	124
high output	3500K	31.5	4000	126
high output	4000K	31	4000	130