

CAMBER ICL LED

PENDANT DIRECT/INDIRECT



Shown with PMO optics

DESCRIPTION

Camber ICL (Independently Controllable Light) is a linear LED pendant luminaire with a thin, articulated profile and Independently Controllable Light output of its indirect and direct components. Using advanced LED engines and optical technique, Camber ICL provides wide spread uplight and well shielded downlight. These components can be controlled independently using a variety of dimming protocols. Please see additional specification sheets for Camber luminaires with uniform control over the light distribution, as well as other mounting arrangements.

PROJECT: _____

TYPE: _____

NOTES: _____

ORDER GUIDE



SENSORS
For latest information on sensors, click [here](#).




CAMPICL	PMO	SW				
LUMINAIRE ID	OPTIC	LIGHT SOURCE	CRI	DIRECT LUMEN PACKAGES	INDIRECT LUMEN PACKAGES	COLOR TEMP.
CAMPICL - Camber pendant independently controllable light	PMO - Precision micro-prism Optic	SW - Static white	80 - 80CRI 90 - 90CRI	750 - Min. low output 750lm/ft 875 - Medium output 875lm/ft 1000 - Max. high output 1000lm/ft #### - Other required lm/ft	500 - Min. low output 500lm/ft 750 - Max. medium output 750lm/ft #### - Other required lm/ft	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K

LUMINAIRE LENGTH	VOLTAGE	DRIVER	ELECTRICAL	MOUNTING
#FT - Nominal length in feet Sections - 4', 8' and 12' only Continuous Run - for luminaires over 8' in multiples of 4'	120 - 120V 277 - 277V UNV - 120V-277V 347 ¹ - 347V ¹ Available with D1 driver only.	D1 - 1% 0-10V DA ² - DALI LDE1 ² - Lutron Hi-lume 1% Eco ² On-site commissioning is required.	1 - 1 circuit 2 - 2 circuits +#EB - Emergency battery (min 4' fixture, except Lutron) +#EM - Emergency light circuit +#NL - Night light circuit +GTD - Generator transfer device	53WAC36 - Power 5" + non power 3" white canopy (36" aircraft cable) 55SWW18 - Power 5" + non power 5" white canopy & stem (18" stem) For all other options refer to our Pendant Mounting Guide


FINISH	CONTROL ³	CONNECTED CONTROLS ⁸	OPTIONS
W - Matte white AL - Aluminum CF# - Custom finish specify RAL#	STANDALONE CONTROLS ^{4,5} Specify the quantity (#) of sensors per fixture. #OMS ⁶ - Onboard Occupancy #OMS## ⁷ - Onboard Occupancy with bi-level dimming #ODS - Onboard Daylight #OCS - Onboard Occupancy & Daylight	LU - Lutron AWN - Lutron Athena Wireless Node RF Only AWNS - Lutron Athena Wireless Node Sensor ENC - Encelium NA - None	FU120 - Fuse 120V FU277 - Fuse 277V TB# - T-bar caddy clip specify grid size TG# - Tegular caddy clip specify grid size ST - Screw Slots caddy clip CU - Custom
	³ Standalone and connected control options cannot be combined. ⁴ Available with D1 driver and 1 circuit options only. ⁵ Minimum 4' per zone. Provide control zone length.	⁶ Fixture turns off when no occupancy. ⁷ Fixture dims to specified light level % (##). ⁸ Consult factory for connected controls.	

See page 2 for ordering code detailed information

CROSS SECTION

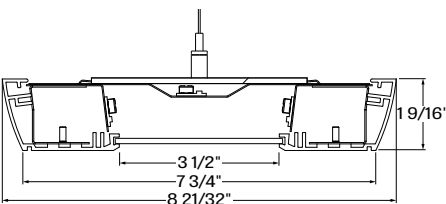

CAMP - aircraft cable

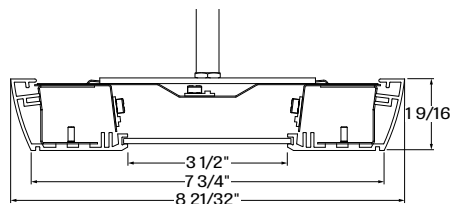

CAMP - stem

OPTICS



PMO - Precision Micro-prism Optic



OPTIC

PRECISION MICRO-PRISM-OPTIC (PMO) - Angled LED array with matte aluminum reflectors and precision Micro-Prism Optic (PMO) shielding of 0.1" thick acrylic. Precisely formed pyramidal prisms with a 0.06" square base provide outstanding control of high-angle brightness.

LIGHT SOURCE - LED

Custom linear array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

PERFORMANCE PER 4' AT 4000K

Medium Output (3000 Lumens)


LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
low output	4000K	74	3000	3000	6000	81
medium output	4000K	81	3500	3000	6500	80
high output	4000K	90	4000	3000	7000	78

Low Output (2000 Lumens)

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
low output	4000K	64	3000	2000	5000	78
medium output	4000K	71	3500	2000	5500	77
high output	4000K	79	4000	2000	6000	76

LUMINAIRE LENGTH

Camber is made up of standard 4, 8 and 12 foot sections only that may be joined together to create continuous run lengths. Nominal run length required must be noted in the product code. The minimum individual section available is 4 feet. All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.



Joining system for Camber

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency > 84%, PF > 0.9, THD < 20%. Other specifiable options include Lutron Hi-Lume 1% Eco and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

EMERGENCY

Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation, up to 1000 lumens per 4ft (25°C) emergency lighting output. Recharge time of 24 hours.

MOUNTING OPTIONS

Fixtures can be pendant-mounted, using aircraft cables, or stem-mounted. Unless otherwise specified, Lumenwerx provides the following hardware:

For cable-mounted fixtures - 53WAC36 (5" white canopy for all power mounting point, 3" white canopy for non power mounting point, and a 36" cable)

For stem-mounted fixtures - 55WSW18 (5" white canopy for all power mounting point, and non power mounting point, and a 18" white stem)

Caddy clips, if required specify under **OPTIONS**

[For all other options, see our website for a detailed Pendant Mounting Guide](#)

FINISH

Interior - 95%, reflective matte powder coated white paint

Exterior - matte white or aluminum powder coating. Custom finishes are also available.

CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details. Three types are available:

OMS: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

QDS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

QCS: Both an occupancy and a daylight sensor are installed in the luminaire.

Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.

Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.

Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

CONSTRUCTION

Housing - Extruded aluminum 0.075" nominal, matte white or aluminum powder coating. Custom finishes are also available.

End cap - Die cast aluminum (0.95" nominal)

Joiners - Male/female system made in die cast aluminum (0.95" nominal)

Interior brackets - Die formed cold rolled sheet steel 20 gauge thick

Reflectors - Flat rolled aluminum sheet 0.040" thick precisely die formed, 95% reflective matte white painted

Hanger - Chromed griplock securely attached with spring steel hardware in end caps and/or joiners

Aircraft Cable Suspension - 7x7 braids aluminum aircraft cable 0.06" thick

Stem - 0.5" diameter threaded steel tube matte white or aluminum powder coating. Custom finishes are also available.

WEIGHT

Camber 4ft - 11.67lbs - 5.3kg

Camber 8ft - 20.92lbs - 9.5kg

Camber 12ft - 30.40lbs - 13.8kg

CERTIFICATION


ETL - Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

PERFORMANCE AT INDIRECT 500 LUMEN PER FOOT


750 LUMEN AT 80CRI - LOW OUTPUT

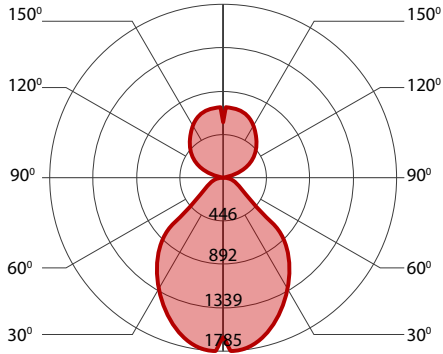

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
low output	2700K	66	3000	2000	5000	76
low output	3000K	67.5	3000	2000	5000	74
low output	3500K	66	3000	2000	5000	76
low output	4000K	64	3000	2000	5000	78


875 LUMEN AT 80CRI - MEDIUM OUTPUT

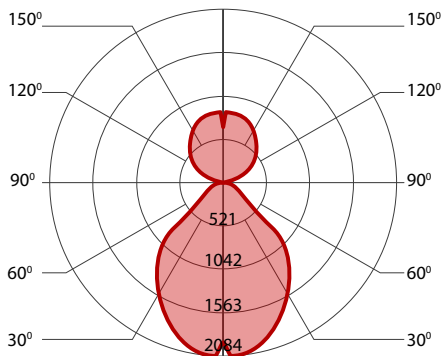

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
medium output	2700K	72.5	3500	2000	5500	76
medium output	3000K	75	3500	2000	5500	73
medium output	3500K	73	3500	2000	5500	75
medium output	4000K	71	3500	2000	5500	77

1000 LUMEN AT 80CRI - HIGH OUTPUT

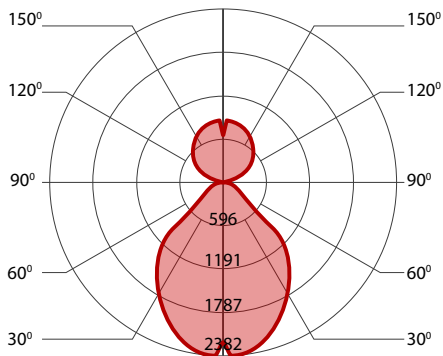


PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
high output	2700K	81	4000	2000	6000	74
high output	3000K	84.5	4000	2000	6000	71
high output	3500K	82	4000	2000	6000	73
high output	4000K	79	4000	2000	6000	76

PERFORMANCE AT INDIRECT 750 LUMEN PER FOOT


750 LUMEN AT 80CRI - LOW OUTPUT

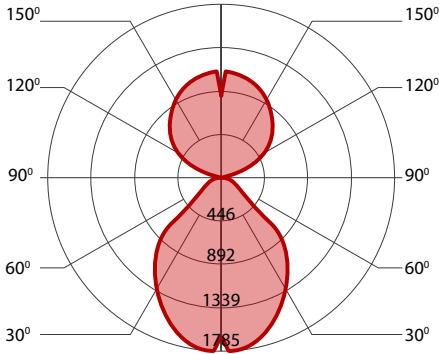

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
low output	2700K	77	3000	3000	6000	78
low output	3000K	79	3000	3000	6000	76
low output	3500K	77	3000	3000	6000	78
low output	4000K	74	3000	3000	6000	81


875 LUMEN AT 80CRI - MEDIUM OUTPUT

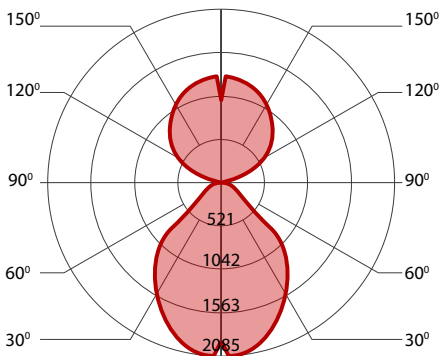

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
medium output	2700K	83.5	3500	3000	6500	78
medium output	3000K	87	3500	3000	6500	75
medium output	3500K	84	3500	3000	6500	77
medium output	4000K	81	3500	3000	6500	80

1000 LUMEN AT 80CRI - HIGH OUTPUT

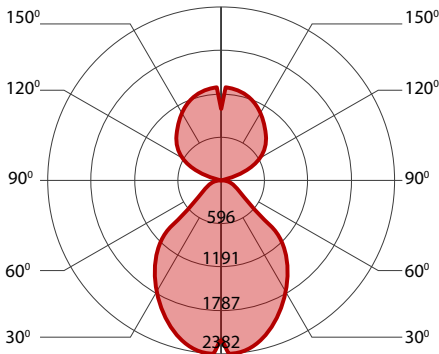

PERFORMANCE PER 4'

LED output	Color Temp	Watts	Direct Lumens	Indirect Lumens	Total Nominal Delivered Lumens	Efficacy LPW
high output	2700K	92	4000	3000	7000	76
high output	3000K	96	4000	3000	7000	73
high output	3500K	92	4000	3000	7000	76
high output	4000K	90	4000	3000	7000	78