



POP CORE ROUND 36 LED


SURFACE-WALL

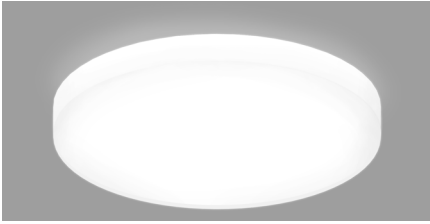


Surface with 3.5" optic



Wall with 3.5" optic



Wall with 5" optic

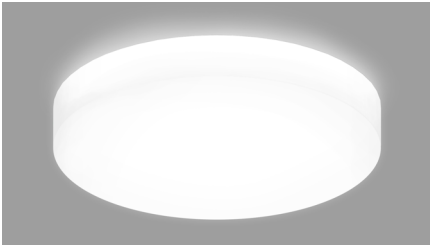

Surface with 5" optic

PROJECT: _____

TYPE: _____

NOTES: _____



DESCRIPTION

POP Core features a simple, uniformly luminous diffuser and delivers up to 114 LPW. The diffuser and light engine form a fully enclosed unit secured by a twist-and-lock mechanism for easy maintenance with no exposed hardware.

ORDER GUIDE


up to 114 lm/W performance

| POROS | 36IN | ULO | | SW | | |
|--------------------------------|--------------|--------------------------------|----------------------------------|-------------------|--------------------------|--|
| LUMINAIRE ID | SIZE | OPTIC | HEIGHT | LIGHT SOURCE | CRI | LUMEN PACKAGE |
| POROS - Pop Round Surface-Wall | 36IN - Ø 36" | ULO - Uniform Lambertian Optic | 3H - 3.5" optic 5H - 5" optic | SW - Static white | 80 - 80CRI 90 - 90CRI | 4000 - Min. low output 4000lm 5500 - Medium output 5500lm 8000 - Max. high output 8000lm #### - Other required lm |


| COLOR TEMP. | VOLTAGE | DRIVER | ELECTRICAL | MOUNTING | FINISH | OPTIONS |
|--|---|--|---|---------------------|---|--|
| 27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K | 120 - 120V 277 - 277V UNV - 120V-277V 347 - 347V | D1 - 1% 0-10V DA - DALI LDE1 - Lutron Hi-lume 1% Eco | 1 - 1 circuit +EB - Emergency battery pack +GTD - Generator transfer device | SUR - Surface mount | W - Matte white CF# - Custom finish specify RAL# | FU120 - Fuse 120V FU277 - Fuse 277V |

See page 3 for ordering code detailed information

CROSS SECTION

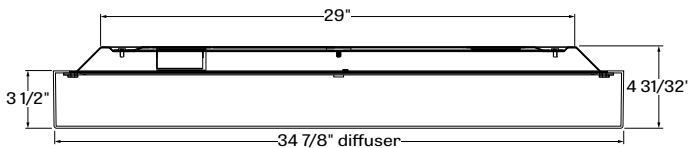

POROS + 3H - Pop Round Surface-Wall with 3.5" optic

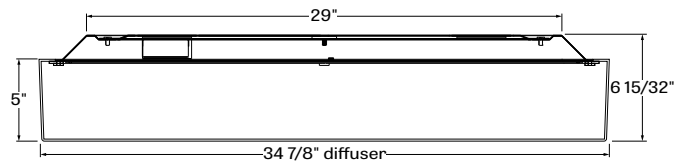


POROS + 5H - Pop Round Surface-Wall with 5" optic


POP CORE ROUND 36 LED

SURFACE-WALL


POP ROUND 3H - 3.5" OPTIC

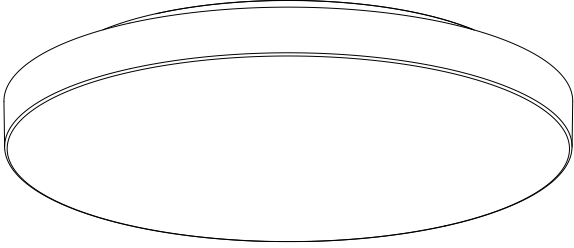


POP ROUND 5H - 5\"/>

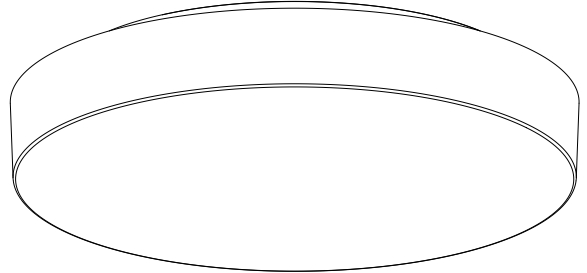

POROS + 3H - Pop Round Surface-Wall with 3.5\"/>

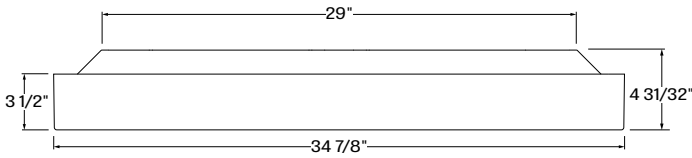

POROS + 5H - Pop Round Surface-Wall with 5\"/>

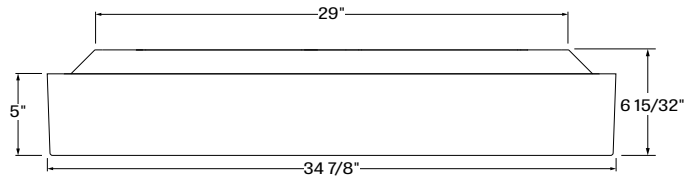

POP CORE ROUND 36 LED


SURFACE-WALL

OPTIC


Uniform Efficiency Lambertian Optic (ULO) - Made of formed impact modified white PMMA, the optic provides an even light distribution with up to 88% transmission. Its unique enclosed shell design protects LEDs against Electrostatic Discharge and dust while its back surface project a soft glow on the mounting surface.

OPTICS HEIGHT

Pop Round Surface-Wall 36 is available with both 3.5" and 5" diffuser.



POROS + 3H - Pop Round Surface-Wall with 3.5" optic



POROS + 5H - Pop Round Surface-Wall with 5" optic

LIGHT SOURCE

Custom array of mid-flux LEDs are mounted directly to the housing for optimal thermal performance. Available in 2700K, 3000K, 3500K and 4000K with a minimum 80 CRI and an option for 90 CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. LEDs operated at reduced drive current to optimize efficacy and lumen maintenance.

All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

PERFORMANCE AT 4000K

| LED output | Color Temp | Watts | Nominal Delivered Lumens | Efficacy LPW |
|---------------|------------|-------|--------------------------|--------------|
| Low output | 4000K | 35 | 4000 | 114 |
| Medium output | 4000K | 49 | 5500 | 112 |
| High output | 4000K | 75.5 | 8000 | 106 |

ELECTRICAL


Factory-set, adjustable output current LED driver with universal (120-277VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Hi-Lume 1% Eco and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

EMERGENCY

Factory installed long life high temperature recyclable Ni-Cad battery pack with test switch and charge indicator, minimum of 90 minutes operation, up to 1300 lumens (25°C) emergency lighting output. Recharge time of 24 hours.

MOUNTING OPTIONS

A Twist and lock mounting system for clean look with no visible fastener and easy maintenance.

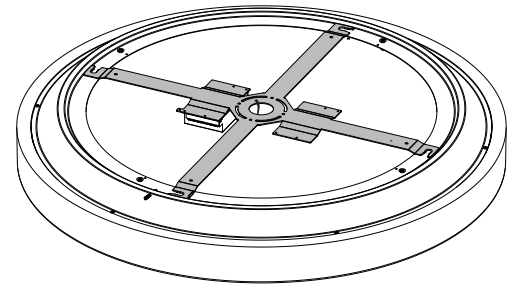

SUR - Surface mount

FINISH

Interior - 95% reflective, matte white powder coating

Exterior - Matte white powder coating.

CONSTRUCTION

Housing - 16 gauge spun aluminum, matte white powder coating

Diffuser - Uniform Lambertian Optic, thermoformed impact modified acrylic, completely enclosed

WEIGHT

RD 36 X 3.5 - 25.51lbs - 11.59kg

RD 36 X 5 - 26.91lbs - 12.22kg

CERTIFICATIONS

ETL - Rated for Indoor Dry/Damp locations.

Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

POP CORE ROUND 36 LED

SURFACE-WALL


WARRANTY

Lumenwerx provides a five-year limited warranty of electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.

POP CORE ROUND 36 LED

SURFACE-WALL


4000 LUMEN AT 80CRI - LOW OUTPUT

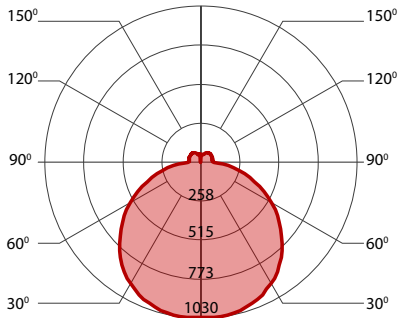

PERFORMANCE

| LED output | Color Temp | Watts | Nominal Delivered Lumens | Efficacy LPW |
|------------|------------|-------|--------------------------|--------------|
| Low output | 2700K | 38 | 4000 | 105 |
| Low output | 3000K | 37.5 | 4000 | 107 |
| Low output | 3500K | 36.5 | 4000 | 110 |
| Low output | 4000K | 35 | 4000 | 114 |


5500 LUMEN AT 80CRI - MEDIUM OUTPUT

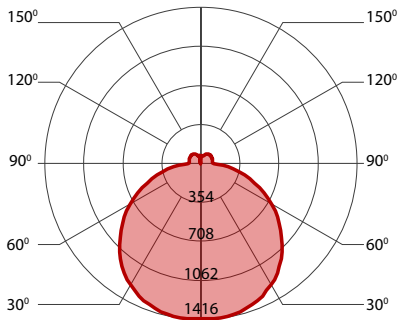

PERFORMANCE

| LED output | Color Temp | Watts | Nominal Delivered Lumens | Efficacy LPW |
|---------------|------------|-------|--------------------------|--------------|
| Medium output | 2700K | 53.5 | 5500 | 103 |
| Medium output | 3000K | 52.5 | 5500 | 105 |
| Medium output | 3500K | 51 | 5500 | 108 |
| Medium output | 4000K | 49 | 5500 | 112 |

8000 LUMEN AT 80CRI - HIGH OUTPUT

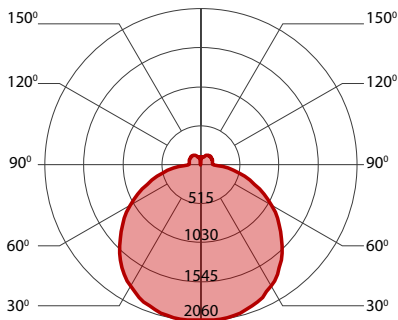

PERFORMANCE

| LED output | Color Temp | Watts | Nominal Delivered Lumens | Efficacy LPW |
|-------------|------------|-------|--------------------------|--------------|
| High output | 2700K | 82.5 | 8000 | 97 |
| High output | 3000K | 81 | 8000 | 99 |
| High output | 3500K | 77.5 | 8000 | 103 |
| High output | 4000K | 75.5 | 8000 | 106 |