

SHELL

Square - Pendant - Cable - Canopy Driver

LUMENWERX

! This product must be installed in accordance with the National Electrical Code and all applicable local codes, by a person familiar with the construction and operation of the product, and the hazards involved. Proper grounding is required for safety.


Ce produit doit être installé suivant le code national de l'électricité, ainsi que tous les codes locaux applicables, par une personne familière avec la construction et le fonctionnement du produit, ainsi que tous les risques qui y sont associés. La mise à terre électrique est obligatoire pour la sécurité.

! Wire dimming conductors as Class 1.

! Do not handle fixture by the wires.


1 DISASSEMBLE THE CANOPY.

Slide the canopy [A] over the power cord [B] and the aircraft cable [C]

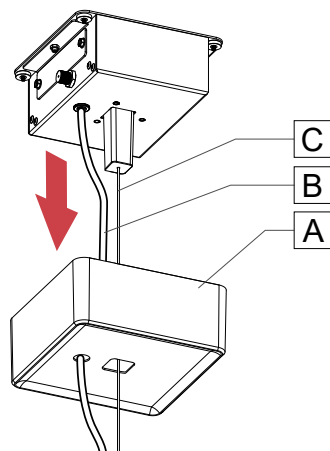


3 INSTALL THE J-BOX PLATE.

Install the J-box plate [E] to the J-box [C] with screws [H].

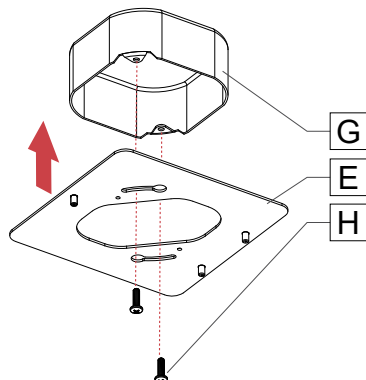

2 REMOVE THE J-BOX PLATE.


Untighten the hex nuts [D] and remove the J-box plate [E] from the driver box [F].

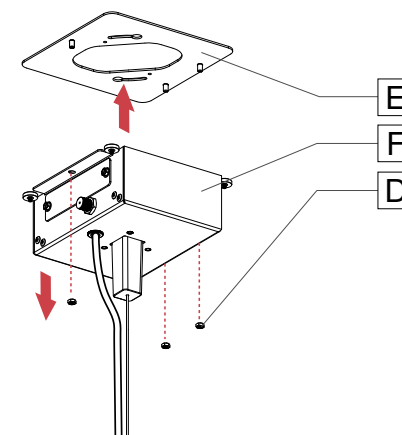

4 MAKE ELECTRICAL CONNECTION.

Make electrical connection between the main power [I] from the building and the power cord [B] from the fixture using wire nuts [J].

Warning: Power must come from single branch circuit.

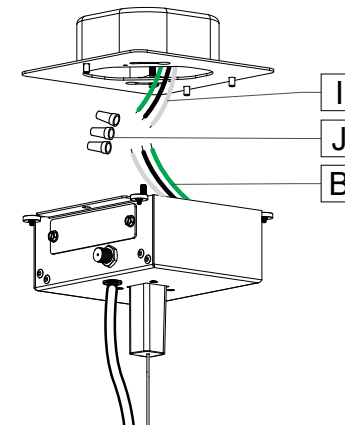


SHELL

Square - Pendant - Cable - Canopy Driver

5 INSTALL THE DRIVER BOX.

Install the driver box [F] on the J-box plate [E] with hex nuts [D].

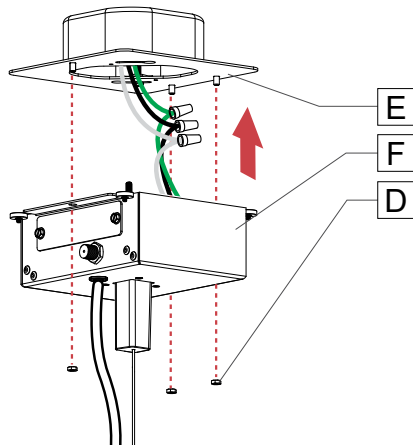

6 INSTALL THE CANOPY.

Slide the canopy [A] over the driver box [F] until its magnets reach the J-box plate [E].

