

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE



Declare.




DESCRIPTION

Squero Combination Pattern brings style and flexibility to linear lighting systems. Less than 2" wide, Squero offers a variety of optics, each providing a different visual texture, as well as photometric performance. Squero Combination allows various optics to be combined in a single luminaire. Optional modules are also available for accent lighting. It can be installed as individual luminaires, in continuous runs, or as patterns. See separate spec sheets for Squero and Squero Combination.


SENSORS
For latest information on sensors, click [here](#).



Up to 130 lm/W performance

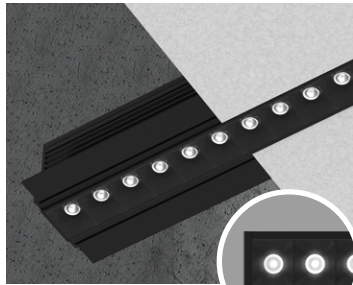


MRO
Miniature Reflector Optics

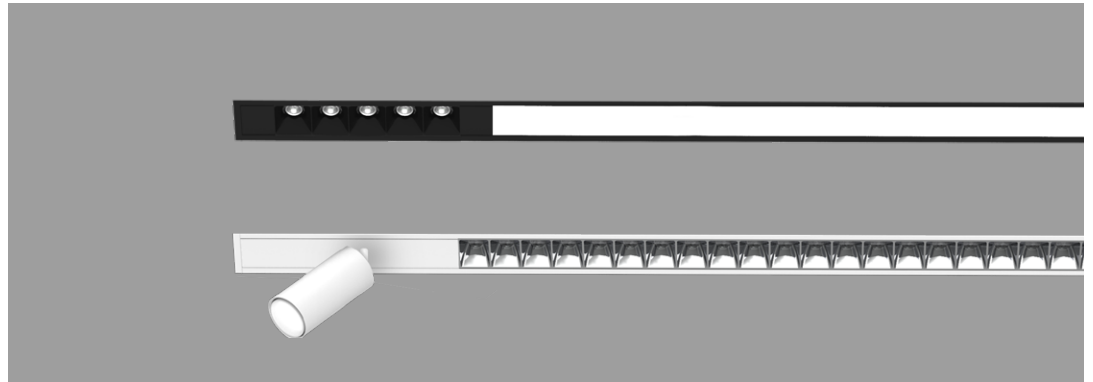

LIT CORNER¹


UNLIT CORNER¹

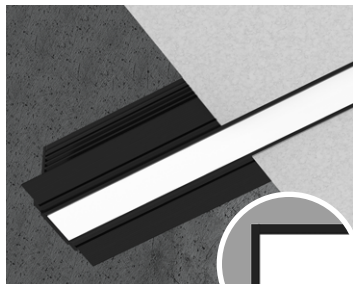

HLO
High-Efficiency Lambertian Optic




MBPL
Matte Black Parabolic Louver

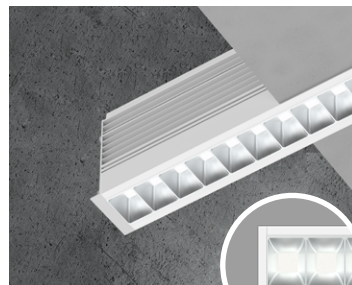


MPL
Matte Parabolic Louver




SPL
Specular Parabolic Louver

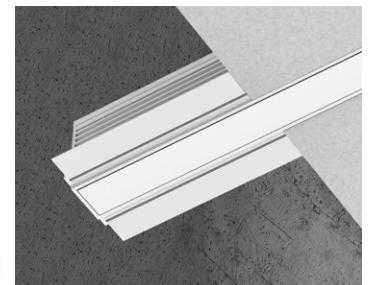


BLA
Blank

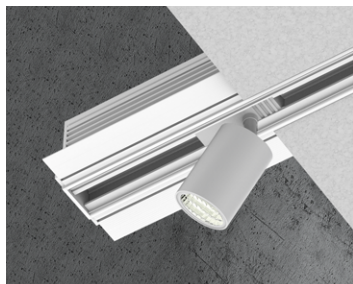

ITRLMX, ITR
Integrated Track

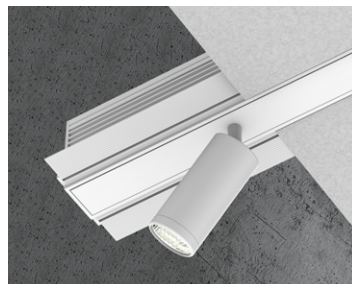

AAM
Adjustable Accent Module

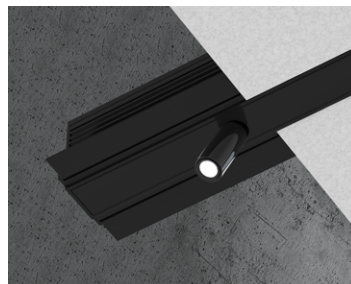

MS
Micro Spot Module

¹Lit corners are only available with HLO, min corner dimensions 2"x2". Unlit corner min dimensions 6"x6".

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE



Project: _____

Type: _____

Order Guide

Example: SQUCOMRPAT-D-6FT-MRO18-2FT-HLO-2FT6IN-BLA-1FT6IN-WH-SW-80CRI-350LMF-27K-LEV-BLA-90COR(1)-120V-D1-1C-NA-TC9-W-NA-NA-1AAM21(80CRI-350LM-27K-W-NA)

A drawing of your combination pattern is required - anything from a line drawing to an architectural drawing.

| LUMINAIRE ID | DISTRIBUTION | TOTAL PATTERN LENGTH ¹ | OPTICS ^{3,4} Specify the total length for each required optic, including the corner lengths. | MRO COLOR | |
|--|-------------------|---|---|---|---|
| SQUCOMRPAT | D | | | | |
| SQUCOMRPAT - Squero Combination Recessed Pattern | D - Direct | #FT#IN ² - Specify the total nominal length (#) in 1' and/or 1" increments Continuous runs: lengths over 12' ¹ Total luminaire length should equal the sum of all the optic lengths. ² Minimum fixture length is 4'. | MRO18 ⁵ - 18 degree Miniature Reflector Optic MRO35 ⁵ - 35 degree Miniature Reflector Optic MRO55 ⁵ - 55 degree Miniature Reflector Optic MBPL ⁶ - Matte Black Parabolic Louver MPL ⁶ - Matte Parabolic Louver SPL ⁶ - Specular Parabolic Louver HLO - High-Efficiency Lambertian Optic BLA ⁷ - Blank ITRLMX ⁸ - Integrated track by Lumenwerx ITR ^{8,9} - Integrated track by others | FT IN IN FT FT FT FT IN IN IN IN | WH ¹⁰ - White BK ¹⁰ - Black NA - Not applicable ¹⁰ Only available with MRO optics. |

| LIGHT SOURCE | CRI | LUMEN PACKAGE | COLOR TEMP. | CORNER TYPE ¹⁵ |
|--------------|-----|---------------|-------------|---------------------------|
|--------------|-----|---------------|-------------|---------------------------|

| | | | | | | |
|--------------------------|--|---|--|---|--|---|
| SW - Static white | 80CRI - 80+ CRI 90CRI ¹² - 90+ CRI | 350LMF - Eco low output 350 lm/ft 500LMF - Low output 500 lm/ft 750LMF - Medium output 750 lm/ft 1000LMF ^{13,14} - High output 1000 lm/ft NA - Not applicable | 27K ¹⁵ - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K ¹⁵ - 5000K | #LEV2C(A##XX) ¹⁷ - 2-way leveled corner #LEV3C(A##XX) ^{18,19} - 3-way leveled corner #LEV4C(A##XX) ^{18,19} - 4-way leveled corner #INN2C(A90XX) ²⁰ - 2-way inner corner #OUT2C(A90XX) ²⁰ - 2-way outer corner | ANGLE (A##): (A60) - 60° (A90) - 90° (A120) - 120° (A##) - Custom | OPTIC (XX): HLO - High-Efficiency Lambertian Optic corner min 2'x2' BLA - Blank corner min 6"x6" |
|--------------------------|--|---|--|---|--|---|

| VOLTAGE | DRIVER ²² | ELECTRICAL | ELECTRICAL SECTIONS (optional) ^{28,29} | MOUNTING ³⁴ |
|---------|----------------------|------------|---|------------------------|
|---------|----------------------|------------|---|------------------------|

| | | | | |
|--|--|--|--|--|
| 120V - 120V 277V - 277V UNV - 120V-277V 347V ²¹ - 347V | D1 - 1% 0-10V ELV ²³ - ELV 120V TRI ²³ - TRIAC 120V DA ²⁴ - DALI LDE1 ²⁴ - Lutron Hi-Lume 1% Eco ELD1 - eldoLED 1% ECOdrive 0-10V ELDO - eldoLED 0.1% SOLOdrive 0-10V | 1C - 1 circuit #MC ²⁵ - Multi circuit EC - Emergency-powered fixture NL - Night light fixture DL - Daylight fixture CTD ^{26,27} - Generator transfer device fixture | #EC## ³⁰ - Emergency-powered section #NL## ³⁰ - Night light section #DL## ³⁰ - Daylight section #GTD## ^{30,31,32} - Generator transfer device section #EMB ^{32,33} - Emergency battery NA - None | TG9 - Tegular 9/16" TG15 - Tegular 15/16" TB9 - T-bar 9/16" TB15 - T-bar 15/16" ST - Screw slot T-bar DTR - Trim DTL - Trimless DMF - Drywall mud flange MFM ³⁵ - Multiple flange mounting |
|--|--|--|--|--|

| FINISH ³⁶ | CONTROL ³⁷ | OPTIONS ⁴³ | MODULE (optional) ^{45,46} |
|----------------------|-----------------------|-----------------------|------------------------------------|
|----------------------|-----------------------|-----------------------|------------------------------------|

| | | | |
|--|---|--|--|
| W - Matte white AL - Aluminum B - Matte black CF# - Custom finish, specify RAL# | STANDALONE CONTROLS ^{38,39} Specify the quantity (#) of sensors per fixture. #OMS ⁴⁰ - Onboard Occupancy #OMS## ⁴¹ - Onboard Occupancy with bi-level dimming #ODS - Onboard Daylight #OCS - Onboard Occupancy & Daylight | CONNECTED CONTROLS ⁴² LU - Lutron AWNR - Lutron Athena Wireless Node RF Only AWNS - Lutron Athena Wireless Node Sensor ENC - Encielium WL - Cooper Wavelinx AN - Acuity nLight CA - Casambi LG - Legrand | FUI20 - Fuse 120V FU277 - Fuse 277V NEF ⁴⁴ - No end flanges FWC - Flexible whip cable (6' std) NA - None |
|--|---|--|--|

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE



Module Code


For a module, specify the options in the parentheses.
The light source is static white.
CRI of module matches specification of main fixture.

Examples: 1AAM21(5W-35K-W-NA)

1MS25(5W-27K-W)

| MODULE (optional) | | | | |
|--|--|--|--|---|
| MODULE ^{1,2} | WATTAGE | COLOR TEMPERATURE | FINISH | OPTION |
| #AAM21() - AAM 21° #AAM30() - AAM 30° #AAM36() - AAM 36° ¹ Specify quantity (#). ² 6" blank per module. Blank finish will match fixture finish. | 5W - 5 W, up to 364 lm output 8W - 8 W, up to 624 lm output | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K | W - Matte white B - Matte black | HCL - Honeycomb louver NA - None |
| MODULE ^{1,2} | WATTAGE | COLOR TEMPERATURE | FINISH | |
| #MS25() - Micro Spot 25° #MS35() - Micro Spot 35° #MS50() - Micro Spot 50° ¹ Specify quantity (#). ² 6" blank per module. Blank finish will match fixture finish. | 5W - 5 W, up to 430 lm output | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K | W - Matte white B - Matte black | |

Dimensions

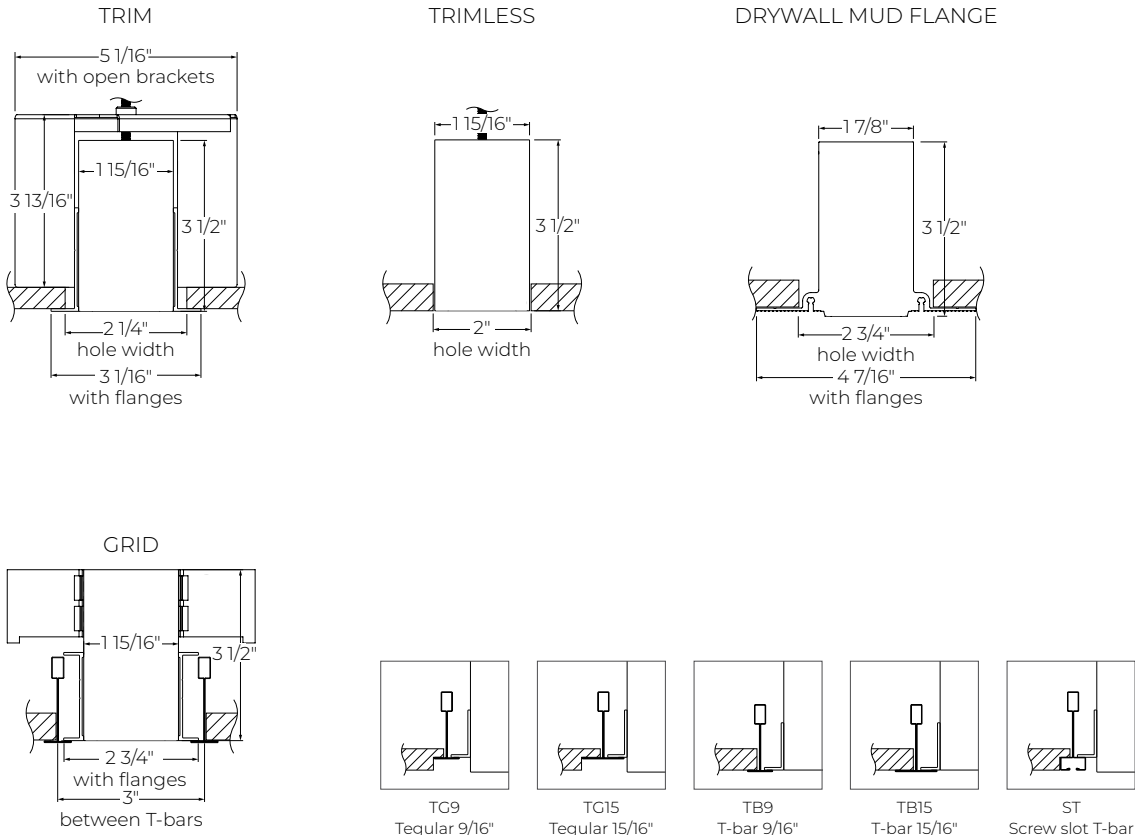

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE




Multiple Flange Mounting Details

Multiple flange mounting can be specified when a fixture run needs to have a multiple flange recessed mounting detail. A drawing is required to clearly illustrate the application.


CEILING CONDITION EXAMPLES (consult factory for project specific ceiling conditions)

DRYWALL/GRID

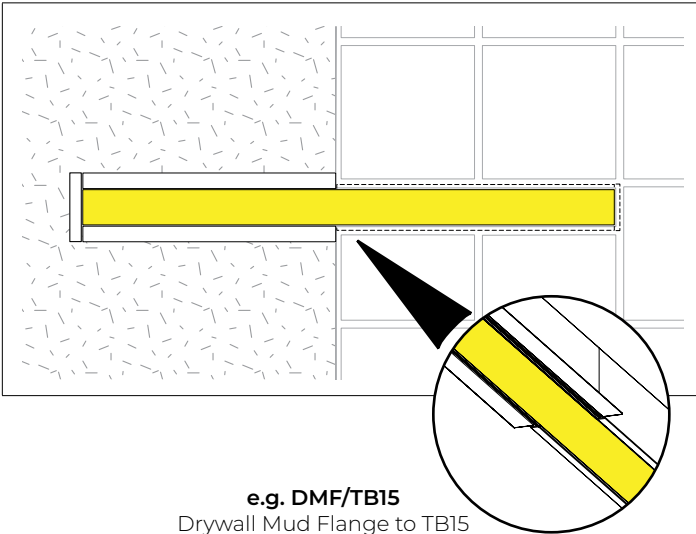


e.g. DMF/TB15
Drywall Mud Flange to TB15

DRYWALL/WOOD

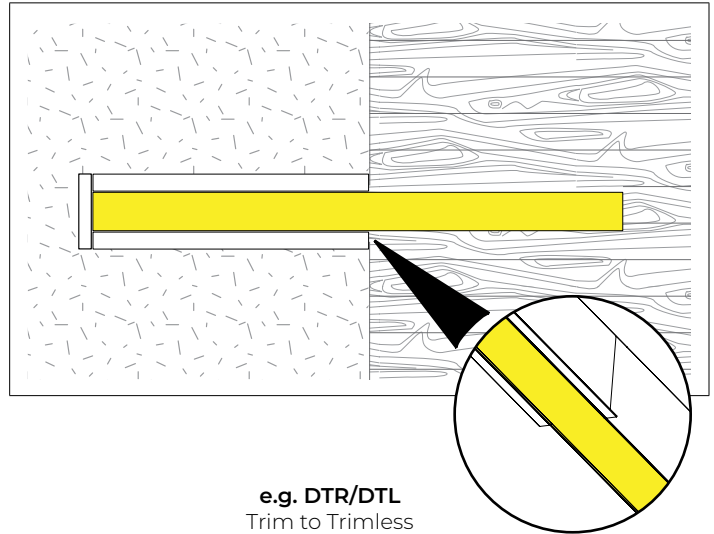

e.g. DTR/DTL
Trim to Trimless

DRYWALL/GRID

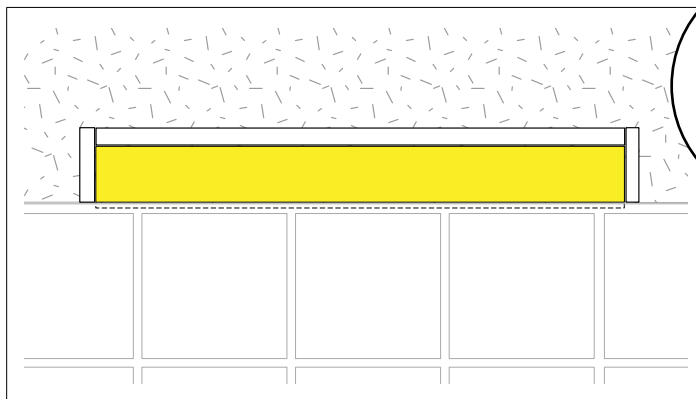


e.g. 1TC9/3DTR
1 long side TC9 and other
3 sides DTR


All drawings are for illustrative purposes only.

TRANSITION MOUNTING OPTIONS (consult factory for details)


Mounting condition alters along the run of the fixture.




Recessed to Pendant



Surface to Pendant



Surface to Recessed in corner



Surface to Pendant in corner

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE




Pattern Layout

CORNER TYPES


LEVELED CORNERS

INNER CORNER

OUTER CORNER

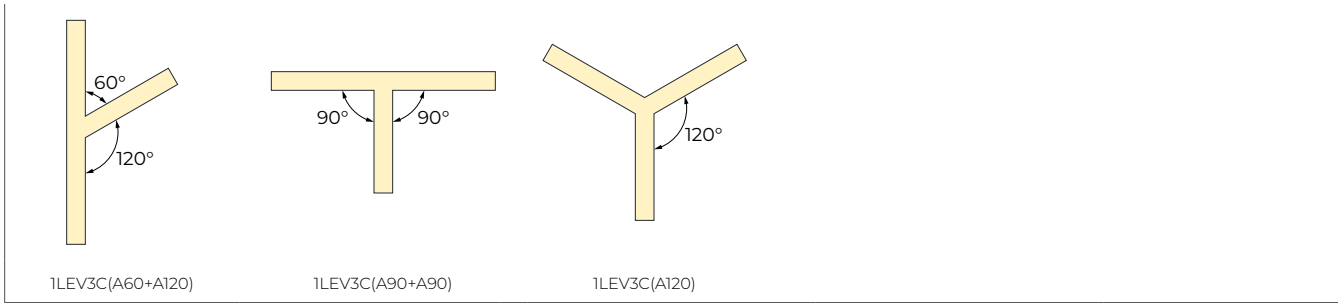

EXAMPLES

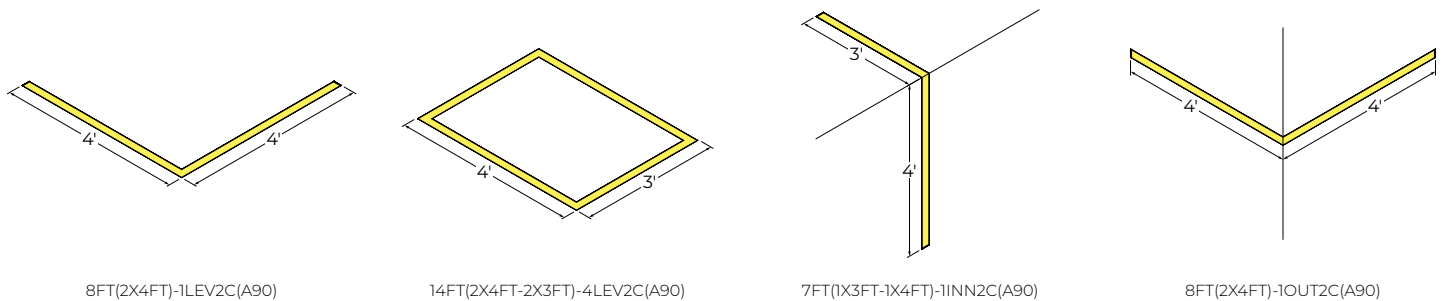

SQUERO COMBINATION

RECESSED PATTERN


STATIC WHITE



Photometrics


Values calculated based on a 4' fixture at 3500K and 80+ CRI for all optics.

MRO18




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350 | 2.7 | 130 |
| 500 | 4.0 | 125 |
| 750 | 6.4 | 118 |
| 1000 | 9.1 | 110 |

MRO35




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350 | 2.9 | 121 |
| 500 | 4.3 | 116 |
| 750 | 6.9 | 108 |
| 1000 | 9.9 | 101 |

MRO55




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350 | 3.2 | 109 |
| 500 | 4.8 | 104 |
| 750 | 7.7 | 97 |
| 1000 | 11.0 | 91 |

HLO




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350 | 3.1 | 112 |
| 500 | 4.6 | 108 |
| 750 | 7.3 | 103 |
| 1000 | 10.2 | 98 |

MBPL




| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350 | 5.2 | 67 |
| 500 | 7.5 | 66 |
| 750 | 11.7 | 64 |

MPL



| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350 | 3.5 | 99 |
| 500 | 5.1 | 98 |
| 750 | 7.7 | 98 |
| 1000 | 10.6 | 95 |

SPL



| LM/FT | W/FT | LM/W |
|-------|------|------|
| 350 | 3.1 | 113 |
| 500 | 4.4 | 113 |
| 750 | 6.7 | 112 |
| 1000 | 9.1 | 109 |

MULTIPLIER TABLES - CCT/CRI

Use these tables to get results for different color temperatures and CRI for all photometric tables.

MRO18 / MRO35 / MRO55

| CCT | WATTS | | LPW | |
|-------|---------|---------|---------|---------|
| | 80+ CRI | 90+ CRI | 80+ CRI | 90+ CRI |
| 2700K | 1.04 | 1.19 | 0.96 | 0.84 |
| 3000K | 1.00 | 1.15 | 1.00 | 0.87 |
| 3500K | 1.00 | 1.12 | 1.00 | 0.89 |
| 4000K | 0.99 | 1.10 | 1.01 | 0.91 |
| 5000K | 0.94 | 1.06 | 1.06 | 0.94 |

MBPL / MPL / SPL

| CCT | WATTS | | LPW | |
|-------|---------|---------|---------|---------|
| | 80+ CRI | 90+ CRI | 80+ CRI | 90+ CRI |
| 2700K | 1.04 | 1.19 | 0.96 | 0.84 |
| 3000K | 1.00 | 1.15 | 1.00 | 0.87 |
| 3500K | 1.00 | 1.12 | 1.00 | 0.89 |
| 4000K | 0.99 | 1.10 | 1.01 | 0.91 |
| 5000K | 0.94 | 1.06 | 1.06 | 0.94 |

HLO

| CCT | WATTS | | LPW | |
|-------|---------|---------|---------|---------|
| | 80+ CRI | 90+ CRI | 80+ CRI | 90+ CRI |
| 2700K | 1.05 | 1.27 | 0.95 | 0.79 |
| 3000K | 1.02 | 1.23 | 0.98 | 0.81 |
| 3500K | 1.00 | 1.19 | 1.00 | 0.84 |
| 4000K | 1.00 | 1.19 | 1.00 | 0.84 |
| 5000K | 0.96 | 1.12 | 1.04 | 0.89 |


SQUERO COMBINATION

RECESSED PATTERN


STATIC WHITE




AAM MODULE



AAM 21°



AAM 30°




AAM 36°


DELIVERED LUMENS

| Wattage | 5.0 | | | | | | | | | |
|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| CRI | 80+ | | | | | 90+ | | | | |
| CCT | 2700K | 3000K | 3500K | 4000K | 5000K | 2700K | 3000K | 3500K | 4000K | 5000K |
| Lumen | 323 | 340 | 350 | 357 | 364 | 265 | 279 | 289 | 299 | 312 |
| Wattage | 8.0 | | | | | | | | | |
| CRI | 80+ | | | | | 90+ | | | | |
| CCT | 2700K | 3000K | 3500K | 4000K | 5000K | 2700K | 3000K | 3500K | 4000K | 5000K |
| Lumen | 553 | 583 | 600 | 612 | 624 | 454 | 478 | 495 | 513 | 534 |


MICRO SPOT MODULE



Micro Spot 25°



Micro Spot 35°



Micro Spot 50°

DELIVERED LUMENS

| Wattage | 5.0 | | | | | | | | | |
|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| CRI | 80+ | | | | | 90+ | | | | |
| CCT | 2700K | 3000K | 3500K | 4000K | 5000K | 2700K | 3000K | 3500K | 4000K | 5000K |
| Lumen | 373 | 400 | 400 | 432 | 432 | 324 | 344 | 344 | 345 | 372 |

SQUERO COMBINATION

RECESSED PATTERN


STATIC WHITE



BIOS

Three BIOS Circadian LED solutions are offered – Biological Static, Biological Dynamic, and Biological Tunable.

Use the decision tree below to identify when and where to use BIOS Wellness LED Lighting Solutions.

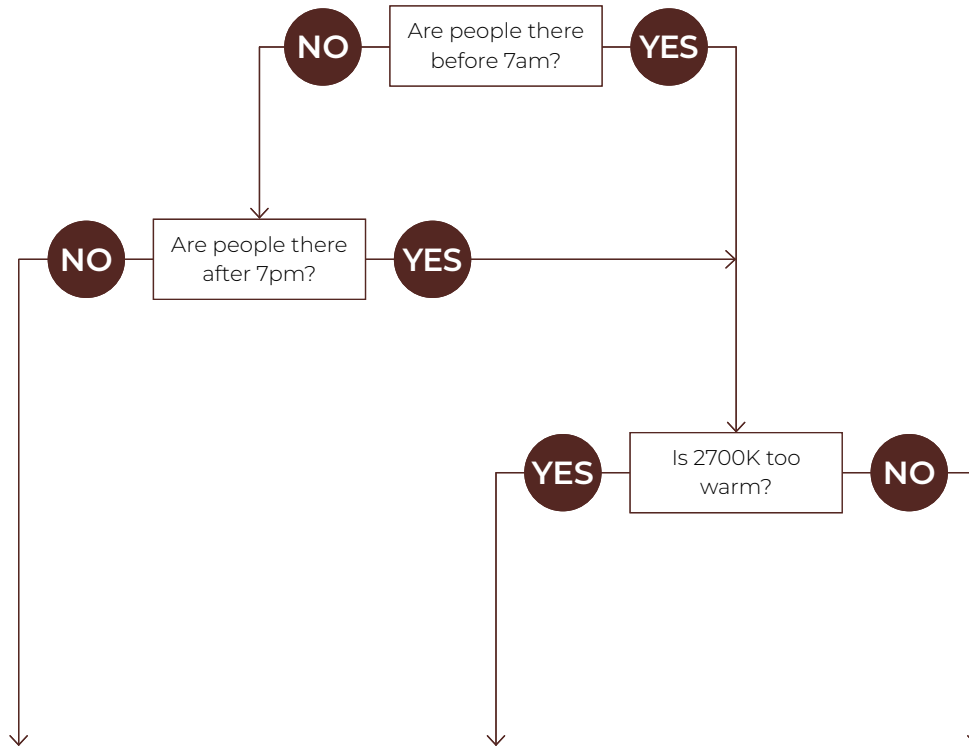

| Biological Static BIOSST | Biological Dynamic BIOSDY | Biological Tunable BIOSTU |
|---|---|---|
| No CCT change when dimmed | 500K shift when dimmed | Dims to 2700K |
| Daytime solution | Daytime + evening solution | Daytime + evening solution |
| Spaces in operation during daytime hours, between 7am and 7pm | Spaces in operation overnight, after 7pm and before 7am, and when CCT color shift in the evening is not preferred | Suitable for spaces in operation overnight, after 7pm and before 7am, and where people do not sleep (CCT color shift in the evening is preferred) |
| E.g. offices, medical/dental offices | E.g. hospitals | E.g. offices, shiftwork |
| | | |

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE



Technical Specifications

OPTICS

Miniature Reflector Optic (MRO)

Locates individual, precisely molded TIR elements over each LED emitter, and further shield the source with precise parabolic reflectors. The controlled beam is remarkably comfortable – especially in a small LED luminaire.

MRO is available in a specular black or gloss white finish and creates a distinctive visual texture.

Different TIR elements offer a choice of beam spreads: narrow (18° with SC of 0.3), medium (35° with SC of 0.6), and wide (55° with SC of 0.9). These concentrated distributions can provide effective task illumination in a variety of applications.

Each MRO module is 6" long with five optical chambers.



Parabolic Louvers (MBPL, MPL & SPL)

Parabolic Louver Optics provide excellent shielding and a pleasing crisp visual texture. The precisely molded louvers consist of 1" deep blades and side reflectors with shielding of 50° lengthwise and 45° crosswise.

The parabolic contour of the blades and side reflectors direct light into a comfortable downlight distribution with a spacing criterion of 1.1, while minimizing shadows from the LED array above each cell.

Three finishes are available: matte black, matte, and specular. Specular (SPL) provides higher efficacy, sharper cut-off, and an ultra quiet appearance at shallow viewing angles. Matte (MPL) offers a softer appearance, a wider beam spread, and gentle brightness transition at cut-off. Matte black (MBPL) offers the lowest UGR in Squero as the black parabolic louver is very quiet and glare free. The UGR is the best in class rating of under 10.



High-Efficiency Lambertian Optic (HLO)

The High-Efficiency Lambertian Optic (HLO) shielding of diffusing 0.075" thick acrylic with up to 88% transmission and good source obscuration is combined with matte white side reflectors to create an efficient optical chamber with uniform luminosity.

Luminaire brightness is controlled by the flux-to-shielding area ratio. For visual comfort, avoid high lumen output unless Squero is installed in a high ceiling application. Spacing criteria: 1.2 (longitudinal) x 1.1 (lateral).



Blank (BLA)

Blank covers provide spacing – functional or rhythmic – in the direct component of a Squero Combination luminaire. Covers are sized according to the Combination design, finished to match the luminaire housing, and snap into the aperture.



LIGHT SOURCE


Static white

Custom linear array of high-flux LEDs mounted onto aluminum-backed circuitry with quick-connect wiring to facilitate service and optimize thermal management. Available in 2700K, 3000K, 3500K, 4000K, and 5000K with a minimum 80+ CRI and an option for 90+ CRI with elevated R9 value. Color consistency maintained to within 3 SDCM. All LEDs have been tested in accordance with IESNA LM-80-08 and the results have shown L80 lumen maintenance greater than 60,000 hours. Absolute product photometry is measured and presented in accordance with IESNA LM-79, unless otherwise indicated.

BIOS

BIOS SkyBlue™ Technology is designed to provide the specific circadian stimulus to improve overall sleep quality, recovery during the night, and overall feelings of well-being.

The non-visual light signals that stimulate our circadian system have peak intensity in the "sky blue" region. As the diagram below illustrates, BIOS SkyBlue technology shifts the peak LED spectral intensity (490 nm) to align better with the peak response of circadian stimulus. Also note the enhanced deep-red (near 660 nm) spectrum.

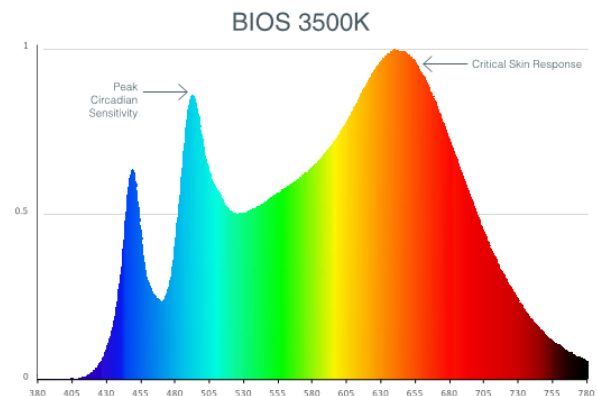

Three BIOS solutions are offered: BIOS Biological Static (BIOSST), BIOS Biological Dynamic (BIOSDY), and BIOS Biological Tunable (BIOSTU). See page 8 for details.

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE



PATTERN LENGTH

All individual sections are joined together onsite using the joiner kits provided. Lumenwerx offers joiner kits that are extremely simple to work with in the field and result in a fixture that appears virtually seamless with no light leak at any connection.

ELECTRICAL

Factory-set, adjustable output current LED driver with universal (120-277 VAC) input. Dimmable from 100% to 1% with 0-10V dimming control. Rated life (90% survivorship) of 50,000 hours at 50°C max. ambient (and 70°C max. case) temperature. At maximum driver load: Efficiency>84%, PF>0.9, THD<20%. Other specifiable options include Lutron Hi-Lume 1% Eco, eldoLED 1% ECOdrive 0-10V, eldoLED 0.1% SOLOdrive 0-10V, ELV, TRIAC, and DALI protocol drivers. All of our standard 0-10V drivers are NEMA 410 compliant.

PoE

Depending on the PoE manufacturer selected, Lumenwerx will install the node in factory as either integral to the luminaire or as a remote module. Factory programming of the PoE node may or may not enable the following functionalities: lumen package, DUO (tunable white), QUADRO (RGBW), emergency battery backup, and sensor integration. These must be addressed and evaluated on a case-by-case basis.

ELECTRICAL SECTION OPTIONS

Electrical section options are available for fixtures specified as multi circuit (#MC). With MC, specify the total number of circuits (#), including any circuits required for optional electrical sections. A drawing is required to specify the layout. Please consult factory for custom configurations.

Electrical sections

Options include emergency-powered (#EC##), night light (#NL##), daylight (#DL##), and generator transfer device (#GTD##) sections. Specify the quantity (#), as well as the section length in inches (##).

Example 1: A 32' Direct fixture with two 8' emergency-powered sections on a second circuit.

Code: 2MC-2EC96

Example 2: A 24' Direct fixture with one 4' generator transfer device section.

Code: 1MC-1GTD48

Battery

Each emergency battery (#EMB) powers a 4' section. All batteries will be on the same circuit. Specify the number of batteries (#) required.

Factory installed long life, high temperature, maintenance-free Lithium-Ion battery pack with self-test functionality, test switch and charge indicator. Minimum of 90 minutes operation, up to 1000 lumens per 4' (25°C) emergency lighting output and recharge time of 24 hours.

MOUNTING

Recessed fixtures can be mounted into exposed or concealed T-bar or tegular ceiling, as well as in ceilings with trim, trimless, or mud flange options.

FINISH

Interior: 95%, reflective matte powder coated white paint

Exterior: Matte white, matte black, or aluminum powder coating. Custom finishes are also available.

CONTROLS

Lumenwerx offers several options for integrating occupancy and daylight harvesting controls in our luminaires.

For latest information on sensors, click [here](#).



Standalone controls

An integrated standalone sensor controls the luminaire in which it is installed. Depending on the length, more than one sensor may be necessary and may control the entire luminaire, or just a section of it. These controls operate independently. Unless otherwise agreed, sensor location, blank size, and functionality of the sensor within the luminaire are selected by Lumenwerx. See client drawings for details.

Three types are available:

OMS: An integral Passive InfraRed (PIR) sensor turns luminaires on and off automatically with field-adjustable time out period. No wall control is used. Coverage pattern for large motion has a 12' diameter with the sensor mounted 8' above the floor; for small motion, the pattern has an 8' diameter. Typically, one sensor is required for every 10' of a continuous luminaire run.

ODS: An integral, daylight harvesting sensor with closed-loop operation dims the luminaire in which it is installed in order to compensate for available daylight. The sensor measures the combination of daylight and luminaire light reflected from horizontal surfaces below the luminaire. Initial onsite calibration is required via the use of provided remote control.

OCS: Both an occupancy and a daylight sensor are installed in the luminaire.

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE



Connected controls

With connected controls, sensors or nodes installed in the luminaire form part of a larger control system infrastructure from manufacturers such as: Lutron, Encelium, Cooper Wavelinx, Acuity nLight, Casambi, Legrand, and others. These connected controls allow for a scalable system providing features like occupancy and daylight control, manual control, scheduling and configuration of various zones and scenes. Energy reporting and system monitoring are also possible. Specific capabilities depend on the control system being used.

Lumenwerx installs the components (sensors, nodes, power packs, etc) which may be supplied to us by a third party, or procured directly by Lumenwerx, depending on the control system manufacturer.



Lumenwerx is solely responsible for the installation of specified components; the controls manufacturer is responsible for performance of the control system.

To indicate a Lumenwerx luminaire with connected controls, identify the specific onsite control system to be integrated into the luminaires using the ordering code. Due to the diversity of components, you must contact factory to assure complete compatibility with intended control system and to fully specify the luminaire.

Complete control specifications, sensor/node/power pack layout, and narrative for the control system are required for Lumenwerx to create shop drawings and submittals.

INTEGRATED TRACK



The integrated track is available with single units and continuous runs, with or without sections of integrated LED. Two options are available: one supplied and installed by Lumenwerx, and the other by others and installed by Lumenwerx. Detailed specifications of the track system must be supplied. Consult factory for details.

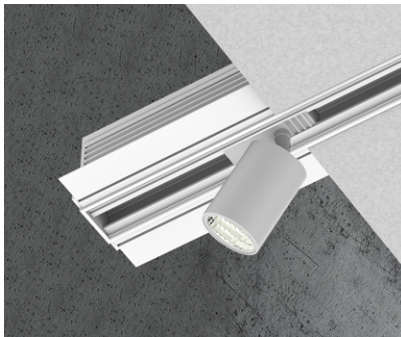

ADJUSTABLE ACCENT MODULE



The Adjustable Accent Module (AAM) features a $\varnothing 1\ 9/16"$ x $3\ 1/4"$ cylinder that rotates 360° and tilts 90° . The LED light source is coupled with TIR optics to provide beam angles of 21° , 30° , and 36° while producing up to 600 lumens. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K, available in either 80+ CRI or 90+ CRI.

The AAM module can be selected in either a white or black finish and a honeycomb louver accessory is also available. The AAM driver is mounted above the cylinder, inside the SQUERO housing and accepts universal input voltage (120-277 VAC) while providing 0-10V dimming control.

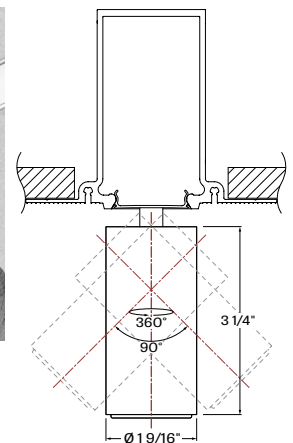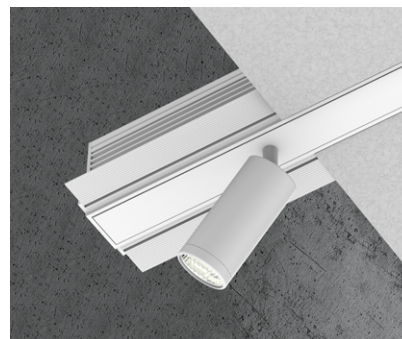

MICRO SPOT MODULE

The Micro Spot is a $\varnothing 7/8"$ x $1\ 5/16"$ adjustable spotlight that extends, retracts, rotates 360° , and tilts 90° . Its LED light source is coupled with a TIR refractor to provide beam angles of 25° , 35° , and 50° , while producing up to 400 lumens. LED light source CCT options are 2700K, 3000K, 3500K, 4000K, and 5000K, available in either 80+ CRI or 90+ CRI. The Micro Spot is offered in a white or black finish. The Micro Spot driver is mounted within the luminaire housing and accepts universal input voltage (120-277 VAC) with 0-10V dimming control.

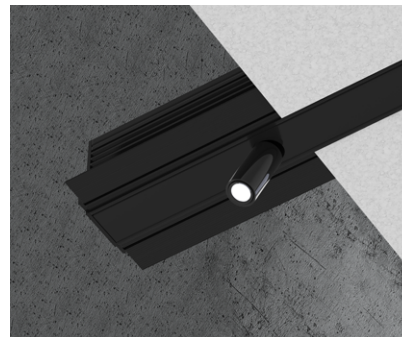

SQUERO COMBINATION

RECESSED PATTERN

STATIC WHITE



CONSTRUCTION

Housing: Extruded aluminum, up to 90% recycled content

Interior brackets: Die-formed cold rolled steel sheet

Joining system: Die-cast aluminum

Louvers: Injection molded optical grade polycarbonate, up to 95% reflective

Recessed flanges: Extruded aluminum, up to 90% recycled content

End plate: Die-formed cold rolled steel sheet

CERTIFICATIONS

ETL: Rated for indoor dry/damp locations. Conforms to UL Standard 1598 and certified to CAN/CSA Standard C22.2 No. 250.0.

Declare: [LBC Red List Approved](#)

WARRANTY

Lumenwerx provides a five-year limited warranty on electrical and mechanical performance of the luminaires, including the LED boards, drivers, and auxiliary electronics. Lumenwerx will repair or replace defective luminaires or components at our discretion, provided they have been installed and operated in accordance with our specifications. Other limitations apply, please refer to the full warranty on our website.